

<b>INVITATION TO BID</b>	<b>CITY OF BATON ROUGE PARISH OF EAST BATON ROUGE PURCHASING DIVISION</b>	<b>RESPONSES MUST BE RECEIVED BY: 07/21/16 11:00 AM CST</b>
<b>TITLE: Combination Sewer Cleaning Vacuum Truck</b>	<b>RETURN BID TO: PURCHASING DIVISION</b>	
FILE NO: <b>02592-16</b> REQ NO: <b>RQ039838</b> AD DATES: <b>06/30 &amp; 7/7</b>	<b><u>Mailing Address:</u></b> PO Box 1471 Baton Rouge, LA 70821	<b><u>Physical Address:</u></b> 222 St. Louis Street 8 <sup>th</sup> Floor Room 826 Baton Rouge, LA 70802
<b>SHIP TO ADDRESS: Public Works Central Garage City of Baton Rouge 333 Chippewa Street Baton Rouge, LA 70805</b>	<b>Contact Regarding Inquiries:</b> Purchasing Analyst : <b>Arielle Williams</b> Telephone Number: <b>225-389-3259 x 309</b> Email: <a href="mailto:apwilliams@brgov.com">apwilliams@brgov.com</a>	
VENDOR NAME	MAILING ADDRESS	
REMIT TO ADDRESS	CITY, STATE, ZIP	
TELEPHONE NO.	FAX NO.	E-MAIL
FEDERAL TAX ID OR SOCIAL SECURITY NUMBER	TITLE	
AUTHORIZED SIGNATURE	PRINTED NAME	
<b>QUESTIONS TO BE COMPLETED BY VENDOR:</b>		
<ol style="list-style-type: none"> <li>1. _____ STATE DELIVERY DAYS MAXIMUM AFTER RECEIPT OF ORDER</li> <li>2. _____ % discount for payment made within 30 days. Discount for payment made in less than 30 days, or less than 1%, or applicable to an indefinite quantity contract will be accepted but not an award consideration.</li> <li>3. _____ STATE ENUMERATED ADDENDA RECEIVED (IF ANY)</li> </ol>		

**F.O.B.: DESTINATION - PAYMENT TERMS: NET 30**

**ALL BLANKS ON THIS PAGE SHOULD BE COMPLETED TO AVOID REJECTION OF BID**

The signature on this document certifies that bidder has carefully examined the instructions to bidders, terms and specifications applicable to, and made a part of this solicitation. By submission of this document, bidder further certifies that the prices shown are in full compliance with the conditions, terms and specifications of this solicitation.

No alterations, changes or additions are allowed on this solicitation, and no additional information, clarifications or other documents are to be included unless specifically required by the specification. Any errors in extensions of prices will be resolved in favor of unit prices submitted.

If services are to be performed in East Baton Rouge City-Parish, evidence of a current occupational license and/or permit issued by the City-Parish shall be supplied by the successful vendor, if applicable.

## INSTRUCTIONS TO BIDDERS / TERMS & CONDITIONS - SEALED BIDS

**Bidders are urged to promptly review the requirements of this specification and submit questions for resolution as early as possible during the bid period. Questions or concerns must be submitted in writing to the purchasing division during the bid period. Otherwise, this will be construed as acceptance by the bidders that the intent of the specifications is clear and that competitive bids may be obtained as specified herein. Protests with regard to the specification documents will not be considered after bids are opened.**

1. Read the entire bid, including all terms and conditions and specifications.
2. Bids are mailed only as a courtesy. The City - Parish does not assume responsibility for failure of bidders to receive bids. Bidders should rely only on advertisements in the local newspaper, and should personally pick up bids and specifications. Full information may be obtained, or any questions answered, by contacting the Purchasing Division, 222 Saint Louis Street, 8<sup>th</sup> Floor, Room 826, Baton Rouge, LA 70802 or by calling (225) 389-3259.
3. The bid number, bidder's name, address and bid opening date should be clearly printed or typed on the outside of the bid envelope. Only one bid will be accepted from each bidder for the same job. Alternates will not be accepted unless specifically requested in the proposal. Submission of more than one bid or alternates not requested may be grounds for rejection of all bids by the bidder.
4. The method of delivery of bids is the responsibility of the bidder. All bids must be received by the Purchasing Division on or before the specified bid opening date and time. Late bids will not be considered under any circumstances.
5. Failure to deliver within the time specified in the bid will constitute a default and may cause cancellation of the contract. Where the city has determined the contractor to be in default, the city reserves right to purchase any or all products or services covered by the contract on the open market and to charge the contractor with cost in excess of the contract price. Until such assessed charges have been paid, no subsequent bid from the defaulting contractor will be considered.
6. The City Parish specifically reserves the right to evaluate bids and award items separately, grouped or on an all or none basis, to accept the bid which is in the best interest of the City parish, and to reject all proposals if that is in the best interest of the City Parish.
7. Except for bids submitted through the [www.bidexpress.com](http://www.bidexpress.com) on-line bidding site, bids shall be accepted only on bid forms furnished by the City of Baton Rouge and Parish of East Baton Rouge Purchasing Division. Altered or incomplete bids (including non-acknowledgement of addenda issued, if any), or the use of substitute forms or documents, shall render the bid non-responsive and subject to rejection.
8. All bids must be typed or written in ink. Any erasures, strikeover and/or changes to prices should be initialed by the bidder. Failure to initial may be cause for rejection of the bid as non-responsive.
9. All bids must be manually signed by a properly authorized party. Failure to do so shall cause the bid to be rejected as non-responsive.
10. Where one or more vendor's exact products or typical workmanship is designated as the level of quality desired or equivalent, the Purchasing Division reserves the right to determine the acceptability of any equivalent offered.
11. Detailed factory specifications, illustrative literature and any deviations should be submitted with bid as required by the specifications or on the bid form. Representative samples shall be submitted upon request, if appropriate. Bidders proposing an equivalent brand or model should submit with the bid information (such as illustrations, descriptive literature, and technical data) sufficient for the City to evaluate quality, suitability, and compliance with the specifications in the solicitation.
12. Written addenda issued prior to bid opening which modifies the bid shall become a part of the bid, and shall be incorporated within the purchase order and/or contract. Only a written interpretation or correction by Addendum shall be binding. Bidders shall not rely upon any interpretation or correction given by any other method. Failure to acknowledge receipt of addenda (if any) shall render the bid non-responsive and subject to rejection.

13. For Printing solicitations, artwork, dies and/or molds shall become the property of the City - Parish Government and must be returned to the Purchasing Division, 222 Saint Louis Street, 8<sup>th</sup> Floor, Room 826, Baton Rouge, LA 70802, upon completion of the order.
14. All applicable chemicals, herbicides, pesticides and hazardous materials must be registered for sale in Louisiana by the Department of Agriculture, State of Louisiana, registered with the EPA and must meet all requirements of Louisiana State Laws. Bidders must submit product label, material safety data sheet and EPA registry number with bid. This information will be required on any subsequent deliveries if there is a change in chemical content or a different product is being supplied. Failure to submit this data may be cause for the bid to be rejected or the contract canceled.
15. Delivery of items must be made on time to City - Parish final destinations within East Baton Rouge Parish. All freight charges shall be prepaid by vendor. Late deliveries or unsatisfactory performance may be cause to cancel the Purchase Order or contract.
16. All bidders should submit with their bid, or have on file with the Purchasing Division, a City - Parish Business Profile Data Form. The Business Profile Data Form is available at the Purchasing Department section of the City of Baton Rouge website, [www.brgov.com](http://www.brgov.com), or by calling the Purchasing Department at 225-389-3259.
17. The State of Louisiana Code of Governmental Ethics places restrictions on awarding contracts or purchase orders to persons who are employed by any agency of the City - Parish Government, or any business of which he or his spouse has more than a twenty-five percent (25%) interest. The Code also prescribes other restrictions against conflict of interest and establishes guidelines to assure that appropriate ethical standards are followed. If any question exists regarding potential violation of the Code of Ethics, bidders should contact the Purchasing Division prior to submission of the bid. Any violation of the Code of Ethics shall be grounds for disqualification of bid or cancellation of contract.
18. All Prices bid shall remain in effect for a period of at least sixty (60) days. City - Parish purchases are excluded from state and local taxes.
19. Acceptance of award by vendor, either in writing or by shipment of any article described herein, shall effectuate a contract between City - Parish and vendor for the materials described herein, and no additional conditions or amendments shall have any effect unless approved in writing by City - Parish.
20. Bidders may attend the bid opening, but no information or opinions concerning the ultimate contract award will be given at the bid opening or during the evaluation process. Information pertaining to completed files may be secured by visiting the EBR City Parish Purchasing office during normal working hours.
21. The City - Parish is an equal opportunity employer, and does not discriminate against anyone on the basis of race, sex, creed, color, religion, national origin, ancestry, reprisal, disability, sexual orientation, marital status or political affiliation.
22. In accordance with Louisiana Revised Statutes, a preference may be allowed for equivalent products produced, manufactured or grown in Louisiana and/or firms doing business in the State of Louisiana. Do you claim this preference if allowed? YES \_\_\_\_\_ NO\_\_\_\_\_. If this preference is claimed, attach substantiating information to the proposal to show the basis for the claim.
23. Right To Audit Clause: The Contractor shall permit the authorized representative of the City-Parish to periodically inspect and audit all data and records of the Contractor relating to his performance under this contract.
24. Terms and Conditions: This solicitation contains all terms and conditions with respect to the purchase of the goods and/or services specified herein. Submittal of any contrary terms and conditions may cause your bid to be rejected. By signing and submitting a bid, vendor agrees that contrary terms and conditions which may be included in their bid are nullified; and agrees that this contract shall be construed in accordance with this solicitation and governed by the laws of the State of Louisiana as required by Louisiana Law.
25. In accordance with the provisions of LA. R.S. 38:2212.9, in awarding contracts after August 15, 2010, any public entity is authorized to reject the lowest bid from, or not award the contract to, a business in which any individual with an ownership interest of five percent or more has been convicted of, or has entered a plea of guilty or ***Nolo Contendere*** to any state felony crime or equivalent federal felony crime committed in the solicitation or execution of a contract or bid awarded under the laws governing public contracts under the provisions of Chapter 10 of this

Title, professional, personal, consulting, and social services procurement under the provisions of Chapter 16 of Title 39 of the Louisiana Revised Statutes of 1950, or the Louisiana Procurement Code under the provisions of Chapter 17 of Title 39 of the Louisiana Revised Statutes of 1950.

26. Certification of no suspension or debarment. By signing and submitting any bid for \$25,000 or more, the bidder certifies that their company, any subcontractors, or principals are not suspended or debarred by the general services administration (GSA) in "Audit Requirements In subpart F of the Office of Management and Budget's uniform administrative requirements, cost principles, and audit requirements for federal awards" (Formerly OMB circular a-133).

A list of parties who have been suspended or debarred can be viewed via the internet at <http://www.sam.gov>.

27. Bid prices shall include delivery of all items F.O.B. destination or as otherwise provided. Bids containing "Payment in Advance" or "C.O.D. requirements may be rejected. Payment is to be made within 30 days after receipt of properly executed invoice or delivery, whichever is later.
28. Bidders may attend the bid opening, but no information or opinions concerning the ultimate contract award will be given at the bid opening or during the evaluation process. Bids may be examined within 72 hours after bid opening. Information pertaining to completed files may be secured by visiting the Purchasing Division during normal working hours. Written bid tabulations may be accessed at: <http://brgov.com/dept/purchase/bidresults.asp>.
29. Contractor agrees, upon receipt of written notice of a claim or action, to defend the claim or action, or take other appropriate measure, to indemnify, and hold harmless, the city, its agents and employees from and against all claims and actions for bodily injury, death or property damages caused by fault of the contractor, its officers, its agents, or its employees. Contractor is obligated to indemnify only to the extent of the fault of the contractor, its officers, its agents, or its employees, however the contractor shall have no obligation as set forth with respect to any claim or action from bodily injury, death or property damages arising out of the fault of the City, its officers, its agents, or its employees.
30. In accordance with Louisiana Law (R.S. 12:262.1 and 12:1308.2), all corporations and limited liability companies must be in good standing with the Louisiana Secretary of State at the time of execution of the contract.
31. Vendors submitting signed bids agree to EEOC compliance and certify that they agree to adhere to the mandates dictated by Title VI and VII of the Civil Right Act of 1964, as amended by the Equal Opportunity Act of 1972, Federal Executive Order 11246, the Federal Rehabilitation Act of 1973, as amended, the Vietnam Era Veteran's Readjustment Assistance Act of 1974, Title IX of the Education Amendments of 1972, the Age Act of 1975, and agrees to abide by the requirements of the Americans with Disabilities Act of 1990.

Bidders must agree to keep informed of and comply with all federal, state and local laws, ordinances and regulations which affect their employees or prospective employees.

#### FEDERAL CLAUSES, IF APPLICABLE.

##### I. Remedies for Breach

Bidder acknowledges that contracts in excess of the simplified purchase threshold (\$150,000.00) shall contain provisions allowing for administrative, contractual, or legal remedies for contractor breaches of the contract terms, and shall provide for such remedial actions as appropriate.

##### II. Termination and Settlement

Bidder acknowledges that contracts in excess of \$10,000.00 shall contain termination provisions including the manner in which termination shall be effected and the basis for settlement. In addition, such provisions shall describe conditions for termination due to fault and for termination due to circumstances outside of the contractors' control.

##### III. Access to Records

Bidder acknowledges that all contracts (except those for less than the small purchase threshold) shall include provisions authorizing the recipient, US Funding Agency, the Comptroller General, or any of their duly authorized

representatives access to all books, documents, papers, and records of the contractor which are directly pertinent to a specific program for the purpose of making audits, examinations, excerpts, and transcriptions.

#### IV. Equal Employment Opportunity

Bidder acknowledges that all contracts shall contain provisions requiring compliance with

E.O. 11246, "Equal Employment Opportunity," as amended by E.O. 11375, "Amending Executive Order 11236 Relating to Equal Employment Opportunity," and as supplemented by regulations at 41 CFR part 60, "Office of Federal Contract Compliance Programs, Equal Employment Opportunity, Dept. of Labor.

#### V. Copeland "Anti-Kickback" Act

Bidder acknowledges that all construction/repair contracts and sub-grants in excess of \$2,000 shall include provisions requiring compliance with the Copeland "Anti-kickback" Act (18

U.S.C. §3141-3148), which provides that each contractor or sub-recipient shall be prohibited from inducing any person employed in the construction, completion, or repair of public work, to give up any part of the entitled.

#### VI. Davis-Bacon Act

Bidder acknowledges that all construction contracts in excess of \$2,000 shall include a provision for compliance with the Davis-Bacon Act, which requires contractors to pay laborers and mechanics wages at a rate not less than the minimum wages specified in a wage determination made by the Secretary of Labor. Additionally, contractors shall be required to pay wages not less than once a week.

#### VII. Contract Work Hours and Safety Standards Act

Bidder acknowledges that all construction contracts in excess of \$2,000, and all other contracts involving the employment of mechanics or laborers in excess of \$2,500 shall include provisions for compliance with sections 102 and 107 of the Contract Work Hours and Safety Standards Act, which requires each contractor to compute the wages of every mechanic and laborer on the basis of a standard work week of 40 hours. Work in excess of the standard work week is permissible provided that the worker is compensated at a rate of not less than one and one-half times the basic rate of pay for all hours worked in excess of 40 hours. Section 107 is applicable to construction work and provides that no laborer or mechanic shall be required to work in surroundings or under working conditions that are unsanitary, hazardous, or dangerous.

#### VIII. Rights to Inventions Made Under a Contract or Agreement

Bidder acknowledges that contracts for the performance of experimental, developmental, or research work shall include provisions providing for the rights of the Federal Government and the recipient in any resulting invention in accordance with 37 CFR part 401, "Rights to Inventions Made by Nonprofit Organizations and the Small Business Firms Under Governments Grants, Contracts, and Cooperative Agreements"

#### IX. Clean Air Act

Bidder acknowledges that the Clean Air Act (CAA) is the comprehensive federal law regulating air emissions from stationary and mobile sources. Among other things, this law authorizes EPA to establish National Ambient Air Quality Standards (NAAQS) to protect public health and public welfare and to regulate emissions of hazardous air pollutants

#### X. Clean Water Act.

The contractor hereby agrees to adhere to the provisions which require compliance with all applicable Standards, orders, or requirements issued under section 508 of the clean water act which prohibits the use under non-exempt Federal contracts, grants or loans of facilities included on the EPA list of violating facilities

## XI. Energy policy and conservation act

The contractor hereby recognizes the mandatory standards and policies relating to energy Efficiency which is contained in the state energy conservation plan issued in compliance with the energy policy and Conservation act (P.L. 94-163).

Bidders must agree to keep informed of and comply with all federal, state and local laws, ordinances and regulations which affect their employees or prospective employees.

## DEALER LICENSE REQUIREMENTS

Any vendor wishing to bid on vehicles for City of Baton Rouge/Parish of East Baton Rouge must be in compliance with Chapter 6, Distribution and Sales of Motor Vehicles, LA State Statute R.S. 32:1251, which stipulates any motor vehicle manufacturer, distributor, dealer and lessor doing business in Louisiana must be licensed in Louisiana.

All bidders shall include a copy of their valid dealer's license, issued under the provisions of R.S. 32:1254, with any bid submitted. Per R.S. 38:2218.8, public entities are prohibited from accepting bids from or entering into any contract or cooperative endeavor agreement or any other transaction for the procurement of vehicles with a dealer who does not possess a valid dealer's license issued pursuant to R.S. 32:1254. A public entity shall reject any bid submitted by a dealer for the purchase of vehicles which does not include a copy of a valid dealer license.

RS 38:2212.8 Prohibition of bids from or contracts with unlicensed dealers

A. A public entity shall not accept any bid from or enter into any contract or cooperative endeavor agreement, or any other transaction for the procurement of vehicles, with a dealer who does not possess a valid dealer's license issued under the provisions of R.S. 32:1254.

B. A public entity shall require that any bid submitted by, or a contract or cooperative endeavor agreement with, a dealer for the purchase of vehicles shall include a copy of a valid dealer's license issued under the provisions of R.S. 32:1254.

C. A public entity shall reject any bid submitted by a dealer for the purchase of vehicles which does not include a copy of a valid dealer license.

D. A public entity shall not sign a contract or cooperative endeavor agreement with a dealer for the purchase of vehicles which does not include a copy of a valid dealer license.

E. If in the course of an audit or review by the legislative auditor, pursuant to the powers and duties in R.S. 24:513, a violation of this Section is found, the legislative auditor shall report such findings to the Louisiana Motor Vehicle Commission.

Acts 2010, No. 376, §1.

## **SPECIAL INSTRUCTIONS FOR VEHICLES AND EQUIPMENT**

1. Bidders must be manufacturer's authorized dealer/representatives for the equipment being bid. In addition, for titled vehicles, bidders must be a licensed Louisiana motor vehicle dealer.
2. Bid prices shall include but not be limited to all items as described in the specifications, freight, "Preparation Charges", temporary license plate and safety inspection stickers if applicable and the standard factory warranty, but shall not include Federal Excise Tax. A Federal Excise Tax exemption certificate will be furnished with the Purchase Order. For vehicles or equipment requiring licenses, the City - Parish will obtain licenses. The City - Parish is excluded from all state and local sales taxes. The right is reserved to accept a price reduction from the successful vendors) to the City - Parish Government on any bid submitted. The City - Parish reserves the right to add or delete factory options at the dealer's invoice cost

Bid prices shall be based on earliest attainable delivery without incurring premium costs.

3. The dealer shall not attach any dealer identification, advertising or similar material to the equipment.
4. All titles, invoices, certificates of origin, odometer statements and warranties must be issued in the name of City of Baton Rouge and Parish of East Baton Rouge, 222 St. Louis Street, 8<sup>th</sup> Floor, RM826, Baton Rouge, LA 70801 unless indicated otherwise on the Purchase Order. The City of Baton Rouge mailing address is City of Baton Rouge and Parish of East Baton Rouge, Attention: Purchasing Division, P. O. Box 1471, Baton Rouge, LA 70821.

Invoices shall not be dated any earlier than the day of delivery on any equipment

5. Successful bidder shall furnish to owner two (2) complete sets of operating manuals for each different piece of equipment. This requirement does not apply to Annual Contracts for automobiles and light trucks.

**CITY OF BATON ROUGE  
PARISH OF EAST BATON ROUGE  
PURCHASING DIVISION**

**Pricing Sheet**

ITEM	DESCRIPTION	QTY	UNIT	UNIT PRICE	TOTAL
0001	<b>Vacuum Truck – 2017 combination sewer cleaning vacuum truck</b> <b>Freightliner 114SD 6x4 66000GVWR ISL370 3000RDS</b> or approved equal in accordance with the attached specifications  MAKE _____  MODEL _____	2	EACH	\$ _____	\$ _____

**GENERAL:** The intent of this proposal is to establish prices for a Combination Sewer Cleaning Vacuum Truck for the City of Baton Rouge Department of Public Works. The evaluation of the services offered and the determination of the lowest responsive and responsible bidder will be the sole responsibility of the Purchasing Division after consultation with the using agency. The brand and model used in this specification is used only to denote the general style, type, character and quality standard of the supplies requested. Please note the brand and model that you are bidding in the designated spaces provided. If bidding other than specified, sufficient information should be enclosed with the bid to in order to determine quality, suitability, compatibility and compliance with the specifications. If requested, information shall be submitted within 7 days.

- Bidders must furnish all descriptive literature, manufacturer's compliance certificates and all other data on the equipment proposed as a required in this specifications

**Bidder's Note:** Bidder should complete every item described in detail in the "Specification Descriptions" section either by entering a check mark in the space provided to indicate the item being bid is exactly as specified except where asked to state specific data, or entering a written description to indicate any proposed item which deviates from the specifications.

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
<b>CHASSIS SPECIFICATIONS:</b>			
<b><u>Vehicle Configuration</u></b>			
114SD CONVENTIONAL CHASSIS (Weight Front 7,934 Weight Rear 6,576)			
2017 MODEL YEAR SPECIFIED			
SET FORWARD AXLE - TRUCK			
STRAIGHT TRUCK PROVISION			
LH PRIMARY STEERING LOCATION			
<b><u>General Service</u></b>			
TRUCK CONFIGURATION			
DOMICILED, USA 50 STATES (INCLUDING CALIFORNIA AND CARB OPT-IN STATES)			
UTILITY/REPAIR/MAINTENANCE SERVICE			
UTILITY BUSINESS SEGMENT			
LIQUID BULK COMMODITY			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
TERRAIN/DUTY: 100% (ALL) OF THE TIME, IN TRANSIT, IS SPENT ON PAVED ROADS			
MAXIMUM 8% EXPECTED GRADE			
SMOOTH CONCRETE OR ASPHALT PAVEMENT - MOST SEVERE IN-TRANSIT (BETWEEN SITES) ROAD SURFACE			
FREIGHTLINER SD VOCATIONAL WARRANTY			
EXPECTED FRONT AXLE(S) LOAD : 20000.0 lbs			
EXPECTED REAR DRIVE AXLE(S) LOAD : 46000.0 lbs			
EXPECTED GROSS VEHICLE WEIGHT CAPACITY : 66000.0 lbs			
<b><u>Truck Service:</u></b>			
SEWER/INDUSTRIAL VACUUM BODY			
BRAKING-EXPECTED CAB TO BODY CLEARANCE : 3.0 in			
<b><u>Engine:</u></b>			
CUM ISL 370 HP @ 2000 RPM, 2100 GOV RPM, 1250 LB/FT @ 1400 RPM (Weight Front -850 Weight Rear -70)			
<b><u>Electronic Parameters:</u></b>			
72 MPH ROAD SPEED LIMIT			
CRUISE CONTROL SPEED LIMIT SAME AS ROAD SPEED LIMIT			
PTO MODE ENGINE RPM LIMIT - 1200 RPM			
PTO MODE THROTTLE OVERRIDE - LIMIT TO 1400 RPM			
PTO MODE BRAKE OVERRIDE - SERVICE BRAKE APPLIED			
PTO RPM WITH CRUISE SET SWITCH - 1200 RPM			
PTO RPM WITH CRUISE RESUME SWITCH - 1200 RPM			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
PTO MODE CANCEL VEHICLE SPEED - 5 MPH			
PTO GOVERNOR RAMP RATE - 200 RPM PER SECOND			
PTO MINIMUM RPM - 700			
REGEN INHIBIT SPEED THRESHOLD - 5 MPH			
<b><u>Engine Equipment</u></b>			
2015 ONBOARD DIAGNOSTICS/2010 EPA/CARB/GHG14			
2008 CARB EMISSION CERTIFICATION - CLEAN IDLE (INCLUDES 6X4 INCH LABEL ON LOWER FORWARD CORNER OF DRIVER DOOR)			
STANDARD OIL PAN			
ENGINE MOUNTED OIL CHECK AND FILL			
SIDE OF HOOD AIR INTAKE WITH FIREWALL MOUNTED DONALDSON AIR CLEANER			
DR 12V 160 AMP 28-SI QUADRAMOUNT PAD ALTERNATOR WITH REMOTE BATTERY VOLT SENSE			
(2) ALLIANCE MODEL 1231, GROUP 31, 12 VOLT MAINTENANCE FREE 2250 CCA THREADED STUD BATTERIES			
BATTERY BOX FRAME MOUNTED			
STANDARD BATTERY JUMPERS			
SINGLE BATTERY BOX FRAME MOUNTED LH SIDE UNDER CAB			
WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN			
NON-POLISHED BATTERY BOX COVER			
POSITIVE LOAD DISCONNECT WITH CAB MOUNTED CONTROL			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b>		<b>Bidder's Deviation</b>
	<b>YES</b>	<b>NO</b>	
SWITCH WITH LOCKING PROVISION MOUNTED OUTBOARD DRIVER SEAT			
POSITIVE AND NEGATIVE POSTS FOR JUMPSTART LOCATED ON FRAME NEXT TO STARTER			
CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE			
ELECTRONIC ENGINE INTEGRAL SHUTDOWN PROTECTION SYSTEM			
CUMMINS EXHAUST BRAKE INTEGRAL WITH VARIABLE GEOMETRY TURBO WITH ON/OFF DASH SWITCH			
RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE			
ENGINE AFTERTREATMENT DEVICE, AUTOMATIC OVER THE ROAD REGENERATION AND DASH MOUNTED REGENERATION REQUEST SWITCH			
INTEGRATED STACK AND B-PILLAR PIPE WITH MINIMUM STACK PROTRUSION ABOVE CAB			
RH CURVED VERTICAL TAILPIPE B-PILLAR MOUNTED ROUTED FROM STEP			
6 GALLON DIESEL EXHAUST FLUID TANK			
100 PERCENT DIESEL EXHAUST FLUID FILL			
STANDARD DIESEL EXHAUST FLUID PUMP MOUNTING			
LH MEDIUM DUTY STANDARD DIESEL EXHAUST FLUID TANK LOCATION			
STANDARD DIESEL EXHAUST FLUID TANK CAP			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
ALUMINUM AFTERTREATMENT DEVICE/MUFFLER/TAILPIPE SHIELD(S)			
HORTON 2-SPEED DRIVEMASTER POLAREXTREME FAN DRIVE			
AUTOMATIC FAN CONTROL WITHOUT DASH SWITCH, NON ENGINE MOUNTED			
CUMMINS SPIN ON FUEL FILTER			
COMBINATION FULL FLOW/BYPASS OIL FILTER			
FLEETGUARD PLAIN COOLANT FILTER			
1300 SQUARE INCH ALUMINUM RADIATOR			
ANTIFREEZE TO -34F, NOAT EXTENDED LIFE COOLANT			
GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT			
CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES			
RADIATOR DRAIN VALVE			
1350 ADAPTER FLANGE FOR FRONT PTO PROVISION			
ELECTRIC GRID AIR INTAKE WARMER			
DELCO 12V 38MT HD STARTER WITH INTEGRATED MAGNETIC SWITCH			
<u><b>Transmission</b></u>			
ALLISON or approved equal 3000 RDS AUTOMATIC TRANSMISSION WITH PTO PROVISION			
<u><b>Transmission Equipment</b></u>			
ALLISON VOCATIONAL PACKAGE 223 - AVAILABLE ON 3000/4000 PRODUCT FAMILIES WITH VOCATIONAL MODELS RDS, HS, MH AND TRV			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
ALLISON VOCATIONAL RATING FOR ON/OFF HIGHWAY APPLICATIONS AVAILABLE WITH ALL PRODUCT FAMILIES			
PRIMARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			
SECONDARY MODE GEARS, LOWEST GEAR 1, START GEAR 1, HIGHEST GEAR 6, AVAILABLE FOR 3000/4000 PRODUCT FAMILIES ONLY			
TCU-MAX PTO ENGINE SPEED ENGAGEMENT NOT CONFIGURED			
TCU-MAX PTO ENGINE SPEED OPERATION NOT CONFIGURED			
TCU-MAXIMUM PTO OUTPUT SPEED ENGAGEMENT NOT CONFIGURED			
TCU-MAXIMUM PTO OUTPUT SPEED OPERATION NOT CONFIGURED			
VEHICLE INTERFACE WIRING WITH BODY BUILDER CONNECTOR MOUNTED END OF FRAME, NO BLUNT CUTS			
ELECTRONIC TRANSMISSION CUSTOMER ACCESS CONNECTOR FIREWALL MOUNTED			
CUSTOMER INSTALLED CHELSEA 277 SERIES PTO / '/			
PTO MOUNTING, LH SIDE OF MAIN TRANSMISSION			
MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN			
PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED			
TRANSMISSION PROGNOSTICS - ENABLED 2013			
WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK			
SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)			
<b><u>Front Axle and Equipment</u></b>			
DETROIT DA-F-20.0-5 20,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE			
MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			
NON-ASBESTOS FRONT BRAKE LINING			
CONMET CAST IRON FRONT BRAKE DRUMS			
FRONT BRAKE DUST SHIELDS			
SKF SCOTSEAL PLUS XL FRONT OIL SEALS			
VENTED FRONT HUB CAPS WITH WINDOW, CENTER AND SIDE PLUGS - OIL			
STANDARD SPINDLE NUTS FOR ALL AXLES			
MERITOR AUTOMATIC FRONT SLACK ADJUSTERS			
STANDARD KING PIN BUSHINGS			
TRW THP-60 POWER STEERING WITH RCH45 AUXILIARY GEAR POWER STEERING PUMP			
4 QUART POWER STEERING RESERVOIR			
OIL/AIR POWER STEERING COOLER MOUNTED ABOVE FRONT CLOSING CROSSMEMBER			
ORGANIC SAE 80/90 FRONT AXLE LUBE			
<b><u>Front Suspension</u></b>			
20,000# FLAT LEAF FRONT SUSPENSION			
GRAPHITE BRONZE BUSHINGS			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
WITH SEALS - FRONT SUSPENSION			
FRONT SHOCK ABSORBERS			
<b><u>Rear Axle and Equipment</u></b>			
RT-46-160 46,000# R-SERIES TANDEM REAR AXLE			
5.63 REAR AXLE RATIO			
IRON REAR AXLE CARRIER WITH STANDARD AXLE HOUSING			
MXL 176T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES			
MXL 17T MERITOR EXTENDED LUBE INTERAXLE DRIVELINE WITH HALF ROUND YOKES			
(1) INTERAXLE LOCK VALVE FOR TANDEM OR TRIDEM DRIVE AXLES			
BLINKING LAMP WITH EACH MODE SWITCH, INTERAXLE UNLOCK DEFAULT WITH IGNITION OFF			
MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES			
NON-ASBESTOS REAR BRAKE LINING			
STANDARD BRAKE CHAMBER LOCATION			
CONMET CAST IRON REAR BRAKE DRUMS			
REAR BRAKE DUST SHIELDS			
SKF SCOTSEAL PLUS XL REAR OIL SEALS			
HALDEX GOLDSEAL LONGSTROKE HEAVY DUTY 30/36 2-DRIVE AXLES SPRING PARKING CHAMBERS			
HALDEX AUTOMATIC REAR SLACK ADJUSTERS			
ORGANIC SAE 80/90 REAR AXLE LUBE			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
<b><u>Rear Suspension</u></b>			
HENDRICKSON RT463 REAR SUSPENSION @ 46,000#			
HENDRICKSON RT/RTE - 7.19" SADDLE			
STANDARD AXLE SEATS IN AXLE CLAMP GROUP			
54 INCH AXLE SPACING			
STEEL BEAMS AND BRONZE CENTER BUSHINGS WITH BAR PIN ADJUSTABLE END CONNECTIONS			
FORE/AFT CONTROL RODS			
<b><u>Brake System</u></b>			
WABCO 4S/4M ABS WITHOUT TRACTION CONTROL			
REINFORCED NYLON, FABRIC BRAID AND WIRE BRAID CHASSIS AIR LINES			
FIBER BRAID PARKING BRAKE HOSE			
STANDARD BRAKE SYSTEM VALVES			
STANDARD AIR SYSTEM PRESSURE PROTECTION SYSTEM			
STANDARD U.S. FRONT BRAKE VALVE WITH ABS VALVES IN RAILS WITH RH HEAT SHIELDING			
RELAY VALVE WITH 5-8 PSI CRACK PRESSURE, NO REAR PROPORTIONING VALVE			
BW AD-9SI BRAKE LINE AIR DRYER WITH HEATER			
AIR DRYER MOUNTED OUTBOARD ON RH RAIL BACK OF CAB, MAXIMUM 20 INCHES BACK OF CAB PROTRUSION			
STEEL AIR BRAKE RESERVOIRS MOUNTED PERPENDICULAR RH UNDER CAB AND AFT AS POSSIBLE FOR REMAINING TANKS			
PULL CABLE ON WET TANK,			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
PETCOCK DRAIN VALVES ON ALL OTHER AIR TANKS			
METALLIC AIR MANIFOLD MOUNTED TO BACK OF CAB CROSSMEMBER WITH SIX 1/4 INCH FITTINGS AND 70 PSI PROTECTION VALVE			
<b><u>Trailer Connections</u></b>			
UPGRADED CHASSIS MULTIPLEXING UNIT			
<b><u>Wheelbase and Frame</u></b>			
6700MM (264 INCH) WHEELBASE			
11/32X3-1/2X10-15/16 INCH STEEL FRAME (8.73MMX277.8MM/0.344X10.94 INCH) 120KSI			
1/4 INCH (6.35MM) C-CHANNEL INNER FRAME REINFORCEMENT			
2275MM (90 INCH) REAR FRAME OVERHANG			
FRAME OVERHANG RANGE: 81 INCH TO 90 INCH			
12 INCH INTEGRAL FRONT FRAME EXTENSION			
CALC'D BACK OF CAB TO REAR SUSP C/L (CA) : 180.54 in			
CALCULATED EFFECTIVE BACK OF CAB TO REAR SUSPENSION C/L (CA) : 177.54 in			
CALC'D FRAME LENGTH - OVERALL : 393.68			
CALC'D SPACE AVAILABLE FOR DECKPLATE : 180.54 in			
CALCULATED FRAME SPACE LH SIDE : 116.43 in			
CALCULATED FRAME SPACE RH SIDE : 148.62 in			
SQUARE END OF FRAME			
FRONT CLOSING CROSSMEMBER			
STANDARD WEIGHT ENGINE CROSSMEMBER			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
STANDARD MIDSHIP #1 CROSSMEMBER(S)			
STANDARD REARMOST CROSSMEMBER			
STANDARD SUSPENSION CROSSMEMBER			
<b><u>Chassis Equipment</u></b>			
OMIT FRONT BUMPER, CUSTOMER INSTALLED SPECIAL BUMPER, DOES NOT COMPLY WITH FMCSR 393.203			
FENDER AND FRONT OF HOOD MOUNTED FRONT MUDFLAPS			
GRADE 8 THREADED HEX HEADED FRAME FASTENERS INSTALLED WITH BOLT HEADS ON OUTSIDE OF FRAME			
DRILLING PREP FOR VAC-CON PER DRAWING #670-30073, REVISION -			
<b><u>Fuel Tanks</u></b>			
100 GALLON/378 LITER ALUMINUM FUEL TANK - LH			
25 INCH DIAMETER FUEL TANK(S)			
PLAIN ALUMINUM/PAINTED STEEL FUEL/HYDRAULIC TANK(S) WITH PAINTED BANDS			
FUEL TANK(S) FORWARD			
PLAIN STEP FINISH			
FUEL TANK CAP(S)			
ALLIANCE FUEL FILTER/WATER SEPARATOR WITH PRIMER PUMP EQUIFLO INBOARD FUEL SYSTEM			
AUXILIARY FUEL SUPPLY AND RETURN PORTS LOCATED ON LH FUEL TANK			
HIGH TEMPERATURE REINFORCED NYLON FUEL LINE			
FUEL COOLER			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
<b><u>Tires</u></b>			
MICHELIN XZY-3 425/65R22.5 20 PLY RADIAL FRONT TIRES			
MICHELIN XDE M/S 11R22.5 16 PLY RADIAL REAR TIRES			
<b><u>Hubs</u></b>			
CONMET PRESET PLUS IRON FRONT HUBS			
CONMET PRESET PLUS IRON REAR HUBS			
<b><u>Wheels</u></b>			
ALCOA LVL ONE 82462X 22.5X12.25 10-HUB PILOT 4.8 INSET 10-HAND ALUMINUM DISC FRONT WHEELS			
ALCOA LVL ONE 88367X 22.5X8.25 10-HUB PILOT ALUMINUM DISC REAR WHEELS			
<b><u>Cab Exterior</u></b>			
114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB			
AIR CAB MOUNTS			
NONREMOVABLE BUGSCREEN MOUNTED BEHIND GRILLE			
3-1/2 INCH FENDER EXTENSIONS			
LH AND RH GRAB HANDLES			
STATIONARY BLACK GRILLE			
BLACK HOOD MOUNTED AIR INTAKE GRILLE			
FIBERGLASS HOOD			
SINGLE 14 INCH ROUND HADLEY AIR HORN UNDER LH DECK			
DUAL ELECTRIC HORNS			
SINGLE HORN SHIELD			
DOOR LOCKS AND IGNITION SWITCH KEYED THE SAME WITH (4) KEYS			
REAR LICENSE PLATE MOUNT END			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
OF FRAME			
HALOGEN COMPOSITE HEADLAMPS WITH BLACK BEZELS			
LED AERODYNAMIC MARKER LIGHTS			
DAYTIME RUNNING LIGHTS - LOW BEAM ONLY			
GROTE #54332 LED STOP/TAIL/TURN LIGHTS GROMMET MOUNTED WITH SEPARATE GROTE #62401 LED BACKUP LIGHTS			
STANDARD FRONT TURN SIGNAL LAMPS			
DUAL WEST COAST MOLDED-IN COLOR MIRRORS			
DOOR MOUNTED MIRRORS			
102 INCH EQUIPMENT WIDTH			
LH AND RH 8 INCH MOLDED-IN COLOR CONVEX MIRRORS MOUNTED UNDER PRIMARY MIRRORS			
STANDARD SIDE/REAR REFLECTORS			
NO CAB MOUNTED STEPS			
63X14 INCH TINTED REAR WINDOW			
TINTED DOOR GLASS LH AND RH WITH TINTED NON-OPERATING WING WINDOWS			
MANUAL DOOR WINDOW REGULATORS			
TINTED WINDSHIELD			
8 LITER WINDSHIELD WASHER RESERVOIR, CAB MOUNTED, WITHOUT FLUID LEVEL INDICATOR			
<b><u>Cab Interior</u></b>			
OPAL GRAY VINYL INTERIOR			
MOLDED PLASTIC DOOR PANEL			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b>		<b>Bidder's Deviation</b>
	<b>YES</b>	<b>NO</b>	
MOLDED PLASTIC DOOR PANEL			
BLACK MATS WITH SINGLE INSULATION			
DASH MOUNTED ASH TRAYS AND LIGHTER			
FORWARD ROOF MOUNTED CONSOLE WITH UPPER STORAGE COMPARTMENTS WITHOUT NETTING			
IN DASH STORAGE BIN			
(2) CUP HOLDERS LH AND RH DASH			
GRAY/CHARCOAL FLAT DASH			
HEATER, DEFROSTER AND AIR CONDITIONER			
STANDARD HVAC DUCTING			
MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH			
STANDARD HEATER PLUMBING			
DENSO HEAVY DUTY AIR CONDITIONER COMPRESSOR			
BINARY CONTROL, R-134A			
STANDARD INSULATION			
SOLID-STATE CIRCUIT PROTECTION AND FUSES			
12V NEGATIVE GROUND ELECTRICAL SYSTEM			
DOME LIGHT WITH 3-WAY SWITCH ACTIVATED BY LH AND RH DOORS			
CAB DOOR LATCHES WITH MANUAL DOOR LOCKS			
(1) 12 VOLT POWER SUPPLY IN DASH			
BASIC HIGH BACK AIR SUSPENSION DRIVER SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
BASIC HIGH BACK NON SUSPENSION PASSENGER SEAT			
LH AND RH INTEGRAL DOOR PANEL ARMRESTS			
VINYL WITH VINYL INSERT DRIVER SEAT			
VINYL WITH VINYL INSERT PASSENGER SEAT			
3 POINT FIXED D-RING RETRACTOR DRIVER AND PASSENGER SEAT BELTS			
FIXED STEERING COLUMN			
4-SPOKE 18 INCH (450MM) STEERING WHEEL			
DRIVER AND PASSENGER INTERIOR SUN VISORS			
<b><u>Instruments and Controls</u></b>			
GRAY DRIVER INSTRUMENT PANEL			
GRAY CENTER INSTRUMENT PANEL			
ENGINE REMOTE INTERFACE WITH PARK BRAKE AND NEUTRAL INTERLOCKS			
BLACK GAUGE BEZELS			
LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM			
2 INCH PRIMARY AND SECONDARY AIR PRESSURE GAUGES			
INTAKE MOUNTED AIR RESTRICTION INDICATOR WITH GRADUATIONS			
PRECO 1040 87 DB TO 112 DB AUTOMATIC SELF-ADJUSTING BACKUP ALARM			
ELECTRONIC CRUISE CONTROL WITH SWITCHES IN LH SWITCH PANEL			
KEY OPERATED IGNITION SWITCH			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b>		<b>Bidder's Deviation</b>
	<b>YES</b>	<b>NO</b>	
AND INTEGRAL START POSITION; 4 POSITION OFF/RUN/START/ACCESSORY			
MANUAL REMOTE ENGINE START/STOP WITH PTO RE-ENGAGE			
ICU3S, 132X48 DISPLAY WITH DIAGNOSTICS, 28 LED WARNING LAMPS AND DATA LINKED			
DIAGNOSTIC INTERFACE CONNECTOR, 9 PIN, SAE J1939, LOCATED BELOW DASH			
2 INCH ELECTRIC FUEL GAUGE			
ENGINE REMOTE INTERFACE WITH INCREMENT/DECREMENT			
ENGINE REMOTE INTERFACE CONNECTOR AT BACK OF CAB			
PREWIRE PACKAGE FOR VAC-CON CONTROL MODULE AND CHASSIS INTERFACE			
ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE			
2 INCH TRANSMISSION OIL TEMPERATURE GAUGE			
ENGINE AND TRIP HOUR METERS INTEGRAL WITHIN DRIVER DISPLAY			
(1) DASH MOUNTED PTO SWITCH WITH INDICATOR LAMP - PARK BRAKE AND NEUTRAL INTERLOCK FOR CUSTOMER INSTALLED PTO			
ELECTRIC ENGINE OIL PRESSURE GAUGE			
AM/FM/WB RADIO WITH BLUETOOTH AND MICROPHONE, FRONT USB PORT, FRONT AND REAR AUXILIARY INPUTS AND J1939			
DASH MOUNTED RADIO			
(2) RADIO SPEAKERS IN CAB			
AM/FM ANTENNA MOUNTED ON FORWARD LH ROOF			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE, WITHOUT ODOMETER			
ELECTRONIC 3000 RPM TACHOMETER			
NO MPH AND/OR RPM GRAPH			
IGNITION SWITCH CONTROLLED ENGINE STOP WITH CONTROL MOUNTED AT FIREWALL			
DIGITAL VOLTAGE DISPLAY INTEGRAL WITH DRIVER DISPLAY			
SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY			
MARKER LIGHT SWITCH INTEGRAL WITH HEADLIGHT SWITCH			
ONE VALVE PARKING BRAKE SYSTEM WITH DASH VALVE CONTROL AUTONEUTRAL AND WARNING INDICATOR			
SELF CANCELING TURN SIGNAL SWITCH WITH DIMMER, WASHER/WIPER AND HAZARD IN HANDLE			
INTEGRAL ELECTRONIC TURN SIGNAL FLASHER WITH HAZARD LAMPS OVERRIDING STOP LAMPS			
<b><u>Design</u></b>			
PAINT: ONE SOLID COLOR			
<b><u>Color</u></b>			
CAB COLOR A: L0006EB WHITE ELITE BC			
BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT			
NO UNDERCOAT			
<b><u>Certification / Compliance</u></b>			
U.S. FMVSS CERTIFICATION, EXCEPT SALES CABS AND GLIDER KITS			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
<u><b>Extended Warranty</b></u>			
TOWING EXTENDED/ROADSIDE SERVICE WARRANTY, 2 YEAR/UNLIMITED MILES/KM, \$550 CAP			
<u><b>Weight Summary</b></u>			
Factory Weight (weights shown are only estimates) Weight Front (8544lbs) Weight Rear (8367) Total Weight (16911lbs). Total Weight: Weight Front (8544lbs) Weight Rear (8367) Total Weight (16911lbs).			
<u><b>Combination Sewer Cleaner Specifications:</b></u>			
The machine is capable of removing stones, grit, grease, sludge and other debris from sanitary sewer and/or storm drain lines by the flushing action of high-pressure water. The high-pressure sewer cleaner operates independent of the vacuum system.			
The machine includes an air conveying vacuum system to provide for the simultaneous removal of the debris flushed to the manhole by the high-pressure water system or for the removal of debris from sewers, sumps, catch basins, digesters, wet wells, bar screens, etc.			
The machine is capable of being operated by one man, with all operating controls for high-pressure water pump, hose reel, and vacuum, located at the front of the machine for safety.			
<u><b>Debris Body</b></u>			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                      NO</b>		<b>Bidder's Deviation</b>
Debris storage body has a minimum usable liquid capacity of 12 cubic yards. The debris body shall be round for maximum strength and constructed of 3/16 inch ASTM A242 Corten. A steel for enhanced corrosion resistance.			
The rear door shall be dished and flanged for maximum strength, full opening, hinged at the top with low profile and adjustable style hinges.			
There shall be a 6" diameter liquid drain valve, "knife valve type" and screen weldment inside for removing excess liquids. Drain will have 10 feet of 6 inch lay flat hose.			
The rear door shall be supplied with a debris deflector shield located inside the debris tank that encompasses 75 percent of the rear door. The debris deflector shield shall deflect material from rear door, and aid in draining off excess liquids.			
A rear door safety prop shall be provided. For ease of maintenance there shall be no hydraulic components located inside the debris body or rear door.			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                      NO</b>		<b>Bidder's Deviation</b>
<p>The debris body has five (5) externally mounted door locks that lock hydraulically. One manual T bolt is installed for operator safety. A hydraulic grabber shall be installed and controlled by one hydraulic cylinder externally mounted for ease of service. The hydraulic locks and grabber shall be operated by one (1) sequential control. In order to allow the operator to control the discharging of liquids from the debris tank by cracking open the door prior to the dumping procedure, the hydraulic grabber shall engage the door at the bottom of the door from 0" - 6". Beyond the 6" stroke, the grabber shall automatically disengage the door, allowing for the dumping of the debris tank.</p>			
<p>Dual steel weldments with stainless steel screen 8" x 28" each providing up to 1200 square inches of added filtration for the vacuum system shall be provided inside the debris tank. These weldments shall be removable and require no cutting or welding.</p>			
<p>A double acting power up/power down hydraulic scissors lift mechanism will be provided to raise body to a minimum 50 degree angle. The scissors lift mechanism shall be designed to support a minimum of 24 inches of the debris tank width to provide stability and when dumping on uneven ground. The lift capacity of hydraulic scissors lift cylinder is 56,000 lbs.</p>			
<p>Dump controls are located on curbside mid-ship of the unit, well forward of the dumping area for operator safety. A manual override system is provided in case of system failure.</p>			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                      NO</b>		<b>Bidder's Deviation</b>
The debris body has a five year warranty. A copy of manufacturer's warranty statement shall be enclosed with bid. If pro-rated so state_____			
An internal polyethylene float device with external indicator is supplied to show when body is loaded to capacity.			
<b><u>Automatic Vacuum Breaker</u></b>			
The automatic vacuum breaker assembly is located inside the body.			
The automatic vacuum breaker assembly shall be controlled by an electric over hydraulic circuit. The entire system shall be replaceable via a bolt on assembly. The assembly shall consist of a 12" inlet and two 8" ports that provide air flow to the vacuum system.			
A full indication activates an automatic vacuum breaker shut down system that completely shuts down 100 percent of the airflow to the vacuum system to prevent overfilling and wastewater discharge into the atmosphere.			
The vacuum breaker system is automatically activated (closed) when the parking brake system is released to eliminate carryover during transit.			
The system is controlled / activated, at the front hose reel control station. This enables the operator to pick up large debris with boom and place debris on the road surface. This system can be used for safety in the event suction must be shut off in case of an emergency.			
<b><u>Positive Displacement Blower</u></b>			
A lobe type positive displacement blower shall be provided capable of 5197 CFM's and 18" of Hg. with cyclone separator. Control of the blower regarding start, stop and the rate of vacuum suction is performed from the front of the truck. A			

<p align="center"><b>Specification Descriptions</b></p> <p align="center">(As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)</p>	<p align="center"><b>Indicate Whether Item Meets Requirements</b></p> <p align="center"><b>YES                  NO</b></p>		<p align="center"><b>Bidder's Deviation</b></p>
<p>vacuum suction breaker disconnect switch is provided to enable operator to pick up large debris with boom and place debris on road surface .The vacuum system shall operate independent of the high-pressure water system.</p>			
<p>The compressor is driven by the chassis engine via a closed loop hydrostatic system using a variable piston pump and motor. This system shall include a heat exchanger for extreme ambient conditions and to maintain the pump suction oil temp at 160 deg. F. max. The heat exchanger shall be protected by a 30-micron filter and cold weather by pass valve. Hydrostatic loop filtration shall be accomplished by a 10 Beta micron return filter and a 10-micron Absolute (no bypass) charge filter.</p>			
<p>The blower is protected by (2) two 3" diameter vacuum relief valves. The system incorporates an air/water separator and a sound silencer to separate material before it enters blower and to ensure quite operation.</p>			
<p>A means of starting, stopping and varying the vacuum suction from operator station at the front of the machine is provided.</p>			
<p>The blower is mounted on a frame independent of the water tank.</p>			
<p>Unit must be capable of vacuuming under water without air induction. A manometer/vacuum test may be required to demonstrate the system performance.</p>			
<p>The positive displacement blower have a 12-month non-prorated warranty.</p>			
<p><b><u>Vacuum Pick Up Hose</u></b></p>			
<p>Shall be front loading, attached at the front of the machine in order to provide ease of positioning the machine over the manhole, as well as afford maximum safety for the operator.</p>			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
The 8" will be mounted on a boom that will provide a minimum of 18' vertical lift utilizing dual hydraulic cylinder and 230 degree of boom rotation powered hydraulically for non-interrupted smooth movement. Boom to have a lift capacity of 500 lbs. at the front bumper.			
The boom will be powered by an electric over hydraulic system: up/down by dual lift cylinders. The right/left movements shall be hydraulic via worm gear rotation.			
The boom shall hydraulically telescope a minimum of 10 ft. forward from the operators station. The height of the boom shall not change while the boom is being telescoped. A manual override system shall be provided for right/left, and up/down functions in case of system failure.			
Control of the boom is by means of a joystick control at the operator's station, requiring no cables at operator's feet for boom operation. A wireless remote control will be provided for Boom, Vacuum Breaker, Chassis Throttle, and Debris Body functions. A manual override system shall be provided for right/left, and up/down functions in case of system failure.			
A state-of-the-art Omnibus electronic control system with electronic joystick, and color monitor, will be supplied mounted on the hose reel. The system performs numerous functions for boom, auxiliary engine (if supplied), hose reel, and vehicle control, etc. which are electronically monitored on screen. A wireless remote control will be provided for Boom, Vacuum Breaker, Chassis Throttle, and Debris Body functions.			
A boom coverage chart shall be provided stating the square feet the boom covers.			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
8 inch diameter pipe extensions with clamps will be provided and carried on the truck as follows:			
1 6-1/2' Catch Basin Nozzle			
1 6' Aluminum Pipe Extension			
1 5' Aluminum Pipe Extension			
1 3' Aluminum Pipe Extension			
<b><u>Water Supply</u></b>			
The water tanks shall have a minimum usable capacity of 1500 U.S. gallons.			
The water tanks shall be constructed of non-corrosive, non-metallic, durable, cross-linked polyethylene to eliminate rust, corrosion, and stress cracking.			
The water tanks shall be mounted at and below the truck frame level to provide a low center of gravity for truck stability.			
A 2-1/2 inch diameter x 25 feet long hydrant hose with hydrant wrench is supplied on the unit.			
An anti-siphon fill device is installed on the unit.			
Inspection ports shall be provided to fill or to add chemicals to the water system.			
A sight gauge to indicate water level is located within sight of the operator station.			
The water tanks are protected by a minimum of 11 gauge steel plating mounted below the water tanks for protection against road hazards when unit travels over the road, off the road or to landfills.			
The water tanks carry a ten year replacement warranty.			
AUXILARY ENGINE (WATER PUMP DRIVE ENGINE)			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
John Deere 6-Cylinder 185 HP at 2400 rpm 415 CID Tier 3 Flex (if available)			
<b><u>HIGH-PRESSURE WATER PUMP</u></b>			
The high pressure water pump shall be rated to deliver smooth continuous pressure and flow through the entire flow range of the pump. The high pressure shall have smooth continuous flow for both the high pressure system and the hand gun system.			
A continuous duty flow of 80 g.p.m. and 2500 p.s.i shall be provided.			
High-pressure relief valves are provided for both the high-pressure system and hand gun system.			
The water pump operates independently of the vacuum system and is powered by the auxiliary engine via clutchless, direct dual powerband drive system.			
The high-pressure water pump drive system carries a five year replacement warranty. Warranty excludes the drive engine, i.e. auxiliary engine.			
The water pump is capable of running dry.			
Controls for starting and stopping the water pump and to vary the flow and pressure shall be at the front hose reel operator's station.			
The high-pressure water pump is equipped with a cold weather drain valve. The valve allows the operator to completely drain the high-pressure pump.			
<b><u>Hose Reel Assembly</u></b>			
The hose reel assembly is mounted on the front of the vehicle. The hose reel shall have a minimum of 30" inside diameter with a capacity of 600' x 1" hose. The hose reel is hydraulically powered in both directions by means of a double chain and sprocket drive. The controls for operating the motor have a			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
<p>flow control device to regulate the rotational speed of the reel in both directions. All hydraulic hoses are behind a steel housing to protect operator from hydraulic oil if a hose fails. The hydraulic motor, chain, and sprockets have a protective cover or are mounted on the radiator side of the hose reel for operator safety. The hose reel articulates 180 degrees to the passenger side allowing operator to work in any position through this arc. This allows greater flexibility in truck placement for manholes located in tough areas and provides greater safety to the operator. Reel extends beyond the width of unit for greater flexibility for positioning reel over offset manholes, catch basins, etc. A hydraulically controlled outrigger leg is supplied that comes in contact with the ground at any one position. A warning light is located in the cab to warn the operator that the outrigger leg is not in its transported position prior to moving the unit. A manual bypass system for the hose reel assembly is provided to manually pull the reel assembly away from its transported position. This feature allows operator to check fluids without starting engines.</p>			
<p><b><u>Jet Hose</u></b></p>			
<p>600' x 1" jet rodder hose will be supplied rated for 2500 psi working pressure and 6250 psi burst pressure.</p>			
<p>A heavy duty hose guide with 25' of nylon rope will be provided.</p>			
<p>Nozzles shall be hardened steel with replaceable ceramic orifices as follows:            1) Chisel head penetrator &amp; 1) standard sanitary.</p>			


<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
<b><u>Manhole Cleaning Water System (handgun)</u></b>			
The high-pressure pump and independent water tank assembly supplied shall be used for manhole cleaning. A smooth continuous flow of 20 g.p.m. and pressure of 600 p.s.i. shall be provided for ease of operation. A hand gun pressure relief valve set at 600 p.s.i. shall be provided. One full functioning hand gun with on/off hand control, replaceable nozzle tip, 12 inch extension, adjustable spray and 50' x 1/2" hose with retractable reel will be provided.			
The hand gun will attach to the system via a quick couple connection at the curbside of the unit. To avoid being coiled at the operator's station a hand gun holder will be provided at the front bumper.			
<b><u>Hydraulic System and Lubrication</u></b>			
The hydraulic system has a 55-gallon capacity.			
The hydraulic system shall incorporate a main shut off valve in case of hydraulic failure.			
The hydraulic system shall incorporate hydraulic pressure relief valves and pressure gauges for ease of trouble shooting and maintenance.			
The unit is equipped on the passenger side, mid-section of the module, a permanent weatherproof white vinyl lubrication chart that points out lubrication points on the module and specifies what type of lubrication and hydraulic fluids are required. The chart also specifies the frequency of each lubrication point.			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
Remote plumbed grease fittings are provided for the vacuum compressor, boom rotation, and water pump drive areas.			
<b><u>Accessories</u></b>			
A minimum twelve (12) month manufacturer's guarantee on the unit will be provided.			
A storage box behind the cab will be provided, 16" x 42" x 96"			
1 Debris body power flush out system			
1 Rear mounted hydraulic pump off system, 400 gpm w/20' lay flat hose			
1 Rear splash guard, tank mounted (2 - 10 O'clock Position)			
1 Air purge system			
1 1/4 turn ball valve water drain			
1 Folding spray bar assembly with in cab controls			
1 Variable flow valve			
1 Lazy Susan style, deck mounted pipe rack, holds 5 pipe			
1 Storage box shall be provided with two roll out shelves			
1 Hydroexcavation package: 50' retractable handgun hose reel with 50' of 1/2" of high pressure hose, HP/Quick disconnect, heavy duty HP unloader valve, main control ball valve, 72" x 1/2" Sch. 80 Lance w/Quick Dcn., Sngl. Fwd. Spray Nozzle, Horiz. Hand.			
1 Hose footage counter, curb side			
1 Auxiliary engine remote oil drain			
1 Remote boom grease zerk assembly, (accessible from ground level)			
1 Remote debris tank grease zerk assembly (accessible from ground level)			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b>		<b>Bidder's Deviation</b>
	<b>YES</b>	<b>NO</b>	
1 Aluminum Dual Roller Level Wind Guide ilo standard			
1 10' leader hose			
1 The hydraulic pump provides power for all hydraulic functions, except vacuum compressor drive, and is direct mounted to the auxiliary engine gear drive adapter. It is not necessary to run the chassis engine to operate the machine hydraulics.			
1 Water pump remote oil drain			
1 Built in Body Prop - Rear Boom Support Mounted			
1 John Deere 6-Cylinder 185 HP at 2400 rpm 415 CID			
1 Traffic Camera with Color Monitor (Camera placement must be picked)			
1 Rear traffic camera			
1 Rear door drain flush out connection			
1 Long handle storage/ (2) PVC			
1 Long handle storage placement - mounted in storage box under shelf			
<b><u>Lighting</u></b>			
The entire module electrical system is vapor sealed to eliminate moisture damage.			
All wiring is color-coded, labeled and run in sealed terminal enclosures.			
All module circuits are protected by circuit breakers.			
Clearance lights and reflectors are furnished in accordance with D.O.T. requirements.			
1 LED strobe light with limb guard, rear debris tank door mounted - Whelen L21HAP LED Beacon with Whelen BGH Branch Guard			
1 4 LED strobes - (2) front bumper, (2) rear bumper - Whelen 50A03ZCR - Amber			
1 LED Arrow stick - Whelen TAM85			

<b>Specification Descriptions</b> (As a minimum (any non-compliance must be marked "NO") each unit shall be equipped with)	<b>Indicate Whether Item Meets Requirements</b> <b>YES                  NO</b>		<b>Bidder's Deviation</b>
Traffic Advisor			
1 Limb guards for flood lights			
1 LED Boom Mounted Flood Light - Whelen NP6BB Worklight			
<b><u>Paint</u></b>			
Unit paint surface is shot blasted, primed and sanded prior to paint. Unit to be painted with DuPont Imron 5000 polyurethane paint.			
Unit shall have reflective Black Striping on sides and rear door			
Chassis and Module shall be painted manufacturers standard white.			
<b><u>Training and Manuals</u></b>			
Operator training will be conducted by a factory-trained representative for a minimum of one day at the time of delivery. 2 copies of the operating and maintenance manual for the sewer cleaner module shall be provided upon unit delivery. An operational video will be provided with the unit.			
<b><u>Mounting and Delivery</u></b>			
The unit described will be mounted on a truck chassis acceptable to the body manufacturer at the factory of the body manufacturer.			

## D I M E N S I O N S

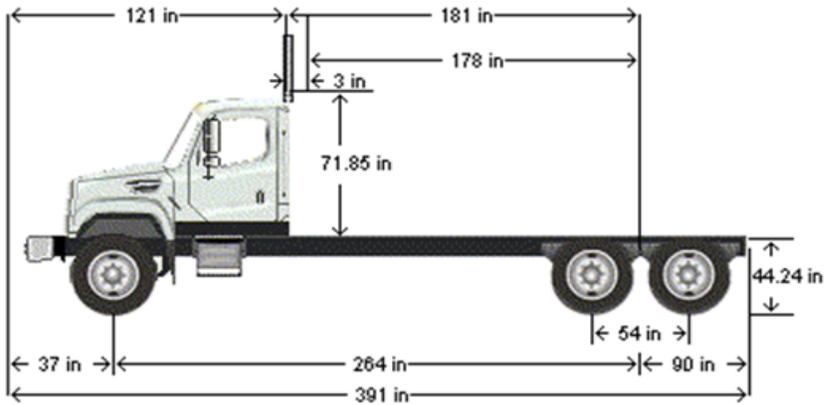

### VEHICLE SPECIFICATIONS SUMMARY - DIMENSIONS

Model.....	114SD
Wheelbase (545).....	6700MM (264 INCH) WHEELBASE
Rear Frame Overhang (552).....	2275MM (90 INCH) REAR FRAME OVERHANG
Fifth Wheel (578) .....	NO FIFTH WHEEL
Mounting Location (577) .....	NO FIFTH WHEEL LOCATION
Maximum Forward Position (in).....	0
Maximum Rearward Position (in).....	0
Amount of Slide Travel (in).....	0
Slide Increment (in).....	0
Desired Slide Position (in).....	0.0
Cab Size (829).....	114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB
Sleeper (682).....	NO SLEEPER BOX/SLEEPER/CAB
Exhaust System (016) .....	RH OUTBOARD UNDER STEP MOUNTED HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH B-PILLAR MOUNTED VERTICAL TAILPIPE

## G V W R



### VEHICLE SPECIFICATIONS SUMMARY - GVWR

Model.....	114SD
Cab Size (829).....	114 INCH BBC FLAT ROOF ALUMINUM CONVENTIONAL CAB
Expected Front Axle(s) Load (lbs).....	20000.0
Expected Pusher Axle(s) Load (lbs).....	0.0
Expected Rear Axle(s) Load (lbs).....	46000.0
Expected Tag Axle(s) Load (lbs).....	0.0
Expected GVW (lbs).....	66000
Expected GCW (lbs).....	0.0
Front Axle (400).....	DETROIT DA-F-20.0-5 20,000# FL1 71.0 KPI/3.74 DROP SINGLE FRONT AXLE
Front Suspension (620).....	20,000# FLAT LEAF FRONT SUSPENSION
Front Hubs (418).....	CONMET PRESET PLUS IRON FRONT HUBS
Front Disc Wheels (502).....	ALCOA LVL ONE 82462X 22.5X12.25 10-HUB PILOT 4.8 INSET 10-HAND ALUMINUM DISC FRONT WHEELS
Front Tires (093).....	MICHELIN XZY-3 425/65R22.5 20 PLY RADIAL FRONT TIRES
Front Brakes (402).....	MERITOR 16.5X6 Q+ CAST SPIDER CAM FRONT BRAKES, DOUBLE ANCHOR, FABRICATED SHOES
Steering Gear (536).....	TRW THP-60 POWER STEERING WITH RCH45 AUXILIARY GEAR
Rear Axle (420).....	RT-46-160 46,000# R-SERIES TANDEM REAR AXLE
Rear Suspension (622).....	HENDRICKSON RT463 REAR SUSPENSION @ 46,000#
Rear Hubs (450).....	CONMET PRESET PLUS IRON REAR HUBS
Rear Disc Wheels (505).....	ALCOA LVL ONE 88367X 22.5X8.25 10-HUB PILOT ALUMINUM DISC REAR WHEELS
Rear Tires (094).....	MICHELIN XDE M/S 11R22.5 16 PLY RADIAL REAR TIRES
Rear Brakes (423).....	MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR, FABRICATED SHOES
Pusher / Tag Axle (443).....	NO PUSHER OR TAG AXLE
Pusher / Tag Suspension (626).....	NO PUSHER OR TAG SUSPENSION
Pusher / Tag Hubs (449).....	NO PUSHER OR TAG HUBS
Pusher/Tag Disc Wheels (509).....	NO PUSHER/TAG DISC WHEELS
Pusher / Tag Tires (095).....	NO PUSHER/TAG TIRES
Pusher / Tag Brakes (456).....	NO PUSHER/TAG BRAKES

### BIDDER'S ORGANIZATION

**BIDDER IS:**

AN INDIVIDUAL

Individual's Name: \_\_\_\_\_

Doing business as: \_\_\_\_\_

Address: \_\_\_\_\_

Telephone No.: \_\_\_\_\_ Fax No.: \_\_\_\_\_

**A PARTNERSHIP**

Firm Name: \_\_\_\_\_

Address: \_\_\_\_\_

Name of person authorized to sign: \_\_\_\_\_

Title: \_\_\_\_\_

Telephone No.: \_\_\_\_\_ Fax No.: \_\_\_\_\_

**A LIMITED LIABILITY COMPANY**

Company Name: \_\_\_\_\_

Address: \_\_\_\_\_

Name of person authorized to sign: \_\_\_\_\_

Title: \_\_\_\_\_

Telephone No.: \_\_\_\_\_ Fax No.: \_\_\_\_\_

A CORPORATION

IF BID IS BY A CORPORATION, THE CORPORATE RESOLUTION MUST BE SUBMITTED WITH BID.

Corporation Name: \_\_\_\_\_

Address: \_\_\_\_\_

State of Incorporation: \_\_\_\_\_

Name of person authorized to sign: \_\_\_\_\_

Title: \_\_\_\_\_

Telephone No.: \_\_\_\_\_ Fax No.: \_\_\_\_\_

**IF BID IS BY A JOINT VENTURE, ALL PARTIES TO THE BID MUST COMPLETE THIS FORM.**

**CORPORATE RESOLUTION**

A meeting of the Board of Directors of \_\_\_\_\_ a corporation organized under the laws of the State of \_\_\_\_\_ and domiciled in \_\_\_\_\_ was held this \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_ and was attended by a quorum of the members of the Board of Directors.

The following resolution was offered, duly seconded and after discussion was unanimously adopted by said quorum:

**BE IT RESOLVED**, that \_\_\_\_\_ is hereby authorized to submit proposals and execute agreements on behalf of this corporation with the City of Baton Rouge, and Parish of East Baton Rouge.

**BE IT FURTHER RESOLVED**, that said authorization and appointment shall remain in full force and effect, unless revoked by resolution of this Board of Directors and that said revocation will not take effect until the Purchasing Director of the Parish of East Baton Rouge, shall have been furnished a copy of said resolution, duly certified.

I, \_\_\_\_\_, hereby certify that I am the Secretary of \_\_\_\_\_, a corporation created under the laws of the State of \_\_\_\_\_ domiciled in \_\_\_\_\_; that the foregoing is a true and exact copy of a resolution adopted by a quorum of the Board of Directors of said corporation at a meeting legally called and held on the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_, as said resolution appears of record in the Official Minutes of the Board of Directors in my possession.

This \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_.

\_\_\_\_\_

SECRETARY