

**LOUISIANA  
DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT  
SPECIFICATIONS**

**TRAFFIC CONTROL SIGNS**

**DESCRIPTION**

This specification sets forth the material and production requirements for finished traffic control signs.

**PRODUCTION**

Finished signs shall be produced in accordance with the sheeting manufacturer's recommendations and the requirements specified herein.

**SIGN BLANKS**

Aluminum blanks must be either Aluminum Alloy 6061-T6 or 5052-H38 and comply with ASTM B209. Blanks shall have a thickness of 0.080 inches with a chromate conversion coating that meets the requirements of ASTM B449 or ASTM B921 Class I or II. After fabrication, the blank shall have a flatness equal to or less than 0.031 inches per foot of length and 0.004 inches per inch of width. Blanks shall be free from grease, dirt and/or loose phosphate coating and all burrs shall be removed from the edges.

Blanks shall be cut and punched in accordance with the charts provided in **Figures 1 through 14**.

**SHEETING MATERIALS**

Sheeting shall be a Type IV, VIII, or XI retroreflective sheeting that is an unmetalized microprismatic retroreflective element material. Sheeting shall conform to ASTM D4956, except as modified herein, with a Class 1 (pressure sensitive) adhesive as specified in ASTM D4956.

Fluorescent Orange sheeting must be an approved product listed on the Approved Materials List (AML) 1015M00090 Reflective Sheeting, Type IV, Temporary Signs, Barricades, and Channelizing Devices (ReflectSheet, T IV, TempSign, Barr, ChanDev).

All sheeting colors, except for Fluorescent Orange, shall be an approved product listed on the Approved Materials List (AML) 1015M00139 for Reflective Sheeting, Type IV, Permanent, 1015M00139 Reflective Sheeting, Type VIII, Permanent, or 1015M00241 Reflective Sheeting, Type XI, Permanent.

The sheeting, when processed, applied and cleaned in accordance with the manufacturer's recommendations shall perform in accordance with Table 1015-4.

**Table 1015-4  
Accelerated Weathering Standards<sup>1</sup>**

Type	Retroreflectivity <sup>2</sup>				Colorfastness <sup>3</sup>	
	Orange/ Fluorescent Orange		All colors, except Orange/ Fluorescent Orange		Orange/ Fluorescent Orange	All colors, except Orange/ Fluorescent Orange
<i>IV, VIII and Type XI</i>	1 year	80 <sup>4</sup>	3 years	80 <sup>4</sup>	1 year	3 years

<sup>1</sup>At an angle of 45° from the horizontal and facing south in accordance with ASTM G7 at an approved test facility in Louisiana or South Florida.

<sup>2</sup>Percent retained retroreflectivity of referenced table after the outdoor test exposure time specified.

<sup>3</sup>Colors shall conform to the color specification limits of ASTM D 4956 after the outdoor test exposure time specified.

<sup>4</sup>ASTM D4956, Tables 5, 8, and 10

Sheeting is also required to perform outdoors in accordance with the performance standards in Table 1015-5.

**Table 1015-5  
Reflective Sheeting Performance Standards**

Type	Retroreflectivity <sup>1</sup> -- Durability <sup>2</sup>				Colorfastness <sup>3</sup>
	Orange/ Fluorescent Orange		All colors, except orange/Fluorescent Orange		
<i>IV, VIII and Type XI</i>	3 years	80 <sup>4</sup>	10 years	80 <sup>4</sup>	3 years

<sup>1</sup>Percent retained retroreflectivity of referenced table after installation and the field exposure time specified.

<sup>2</sup>All sheeting shall maintain its structural integrity, adhesion and functionality after installation and the field exposure time specified.

<sup>3</sup>All colors shall conform to the color specification limits of ASTM D 4956 after installation and the field exposure time specified.

<sup>4</sup> ASTM D4956, Tables 5, 8, and 10

## FINISHED SIGN GUARANTY

If the retroreflective sheeting used to manufacture the finished signs, or any portion of the finished sign, fails to comply with the requirements and performance standards of this specification within the periods noted below, the Contractor agrees to replace the defective signs with new finished signs at no cost to the Department. Replacement signs shall carry the unexpired guaranty of the sign for which it replaces. Guaranty shall begin on the date of delivery and apply if failure occurs within:

- Three (3) years for all orange and fluorescent orange sheeting
- Ten (10) years for all sheeting colors except orange and fluorescent orange

## SIGN IDENTIFICATION MARKINGS

**Sign Face (Front) Markings:** All sign faces, except for object markers, shall be labeled with ¼ inch screened lettering within the boarder of the sign in a manner that does not interfere with the image or message of the sign. Labeling must include the following information:

- Location shall be at the bottom left of the sign face
  - Manufacturer's Product ID
- Location shall be at the bottom right of the sign face
  - Size of the Sign
  - Vendor Logo, Name, or Initials
  - Year of Manufacture

See **Figure 15** for additional placement details.

**Back of Sign Markings:** All sign backs, including object markers, shall be permanently labeled with the DOTD Product ID number. Label should be approximately 2" x 3".

## PACKAGING

Orders shall be for a minimum of 1,000 pounds.

Finished signs shall be packaged face to face in bundles of two (2) of the same sign. To prevent damage during shipment, each sign face shall be covered with slip sheeting and double taped on the center of two (2) opposite sides. Contractor shall be aware of and act on any additional packaging requirements noted by the sheeting manufacturer.


Signs shall be bundled, securely banded to pallets and covered in cardboard for delivery via flatbed trailer. Pallets must be covered with a tarp during transport. Individual pallets shall not exceed 2,000 pounds and must be labeled externally with the associated Purchase Order No., sign code(s), sign size(s) and quantity of each type of sign included on the pallet.

Each shipment should be supplied with a freight bill and packaging list noting the Purchase Order No. and the quantity shipped.

Failure to adhere to packaging and shipment directives will result in rejection of the order and materials will be returned "FREIGHT COLLECT" to the vendor.

**SIGN BLANK DIMENSION AND HOLE PLACEMENT CHARTS**

**FIGURE 1 – Octagons**

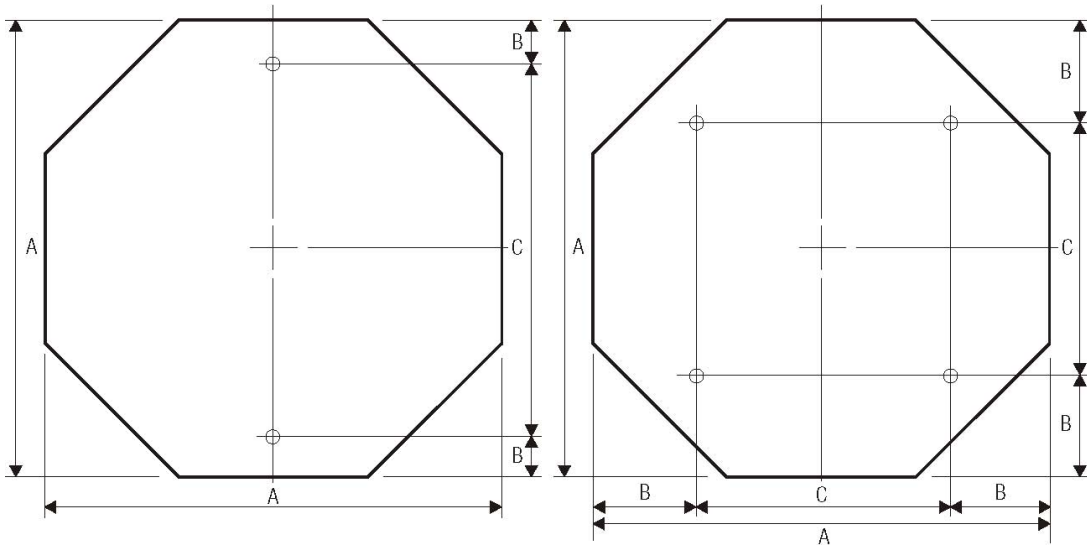


**Column A = Blank Dimensions**

A	B	C
24	3	18
30	3	24
36	3	30

A	B	C
48	9	30

**FIGURE 2 – Equilateral Triangles**

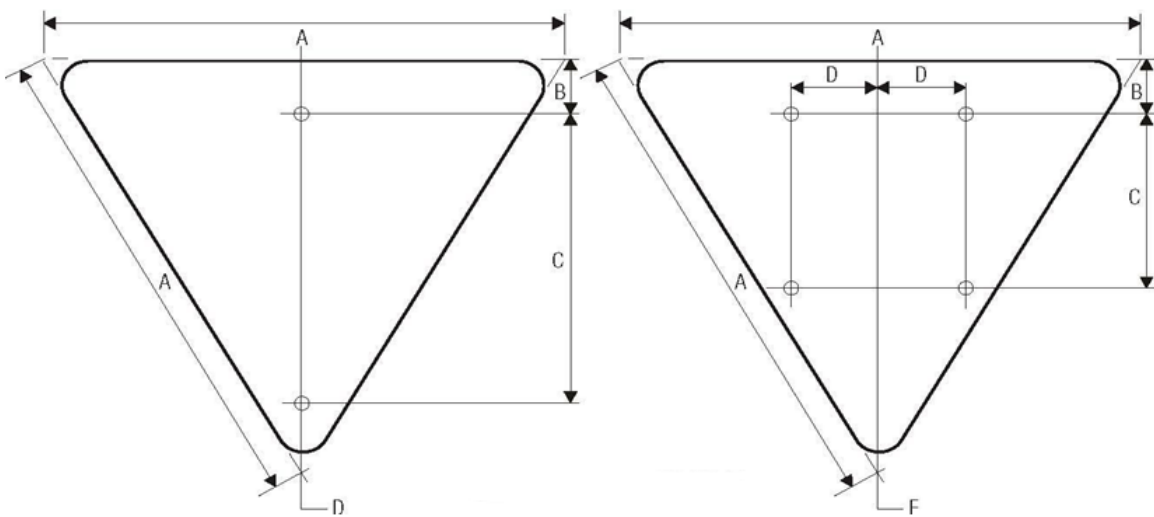


**Column A = Blank Dimensions**

A	B	C	D
30	3	18	1.5
36	3	21	2

A	B	C	D	E
48	3	12	12	3
60	3	18	15	4

**FIGURE 3 – Vertical Rectangle**

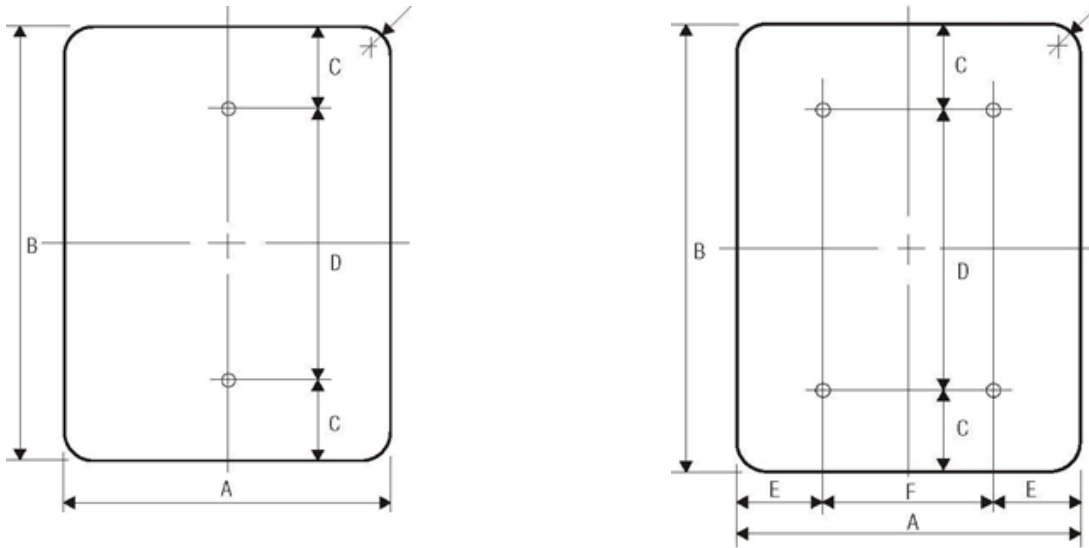


**Columns A & B = Blank Dimensions**

A	B	C	D	E
6	12	1.5	9	1.5
9	12	1.5	9	1.5
10	18	1.5	15	1.5
10	27	3	21	1.5
10	36	6	24	1.875
10	48	6	36	2.25
12	18	1.5	15	1.5
12	36	6	24	1.875
12	48	6	36	2.25
12	60	6	48	3
18	24	3	18	1.5
18	54	6	42	2.25
18	60	6	48	3
24	30	3	24	1.5
24	36	6	24	1.875
30	36	6	24	1.875
36	48	6	36	2.25

A	B	C	D	E	F	G
48	60	6	48	9	30	3

**FIGURE 4 – Horizontal Rectangle**

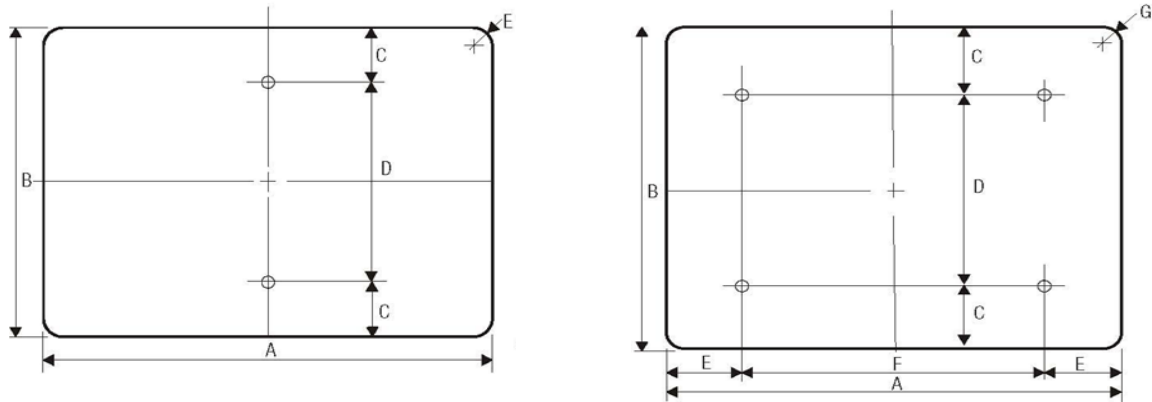


**Columns A & B = Blank Dimensions**

A	B	C	D	E
21	15	1.5	12	1.5
24	8	1.5	5	1.5
24	10	1.5	7	1.5
24	12	1.5	9	1.5
24	18	3	12	1.5
30	15	1.5	12	1.5
30	18	3	12	1.5
30	21	3	15	1.5
30	24	3	18	1.5
36	12	1.5	9	1.5
36	18	3	12	1.5
36	24	3	18	1.5

A	B	C	D	E	F	G
42	30	3	24	9	24	2.25
45	36	6	24	9	27	2.25
48	18	3	12	9	30	1.5
48	24	3	18	9	30	1.875
48	30	3	24	9	30	2.25
48	36	6	24	9	30	2.25
54	18	3	12	9	36	1.5
60	24	3	18	12	36	1.5
60	30	3	24	12	36	2.25
60	36	6	24	12	36	2.25


**FIGURE 5 – Isosceles Triangle**

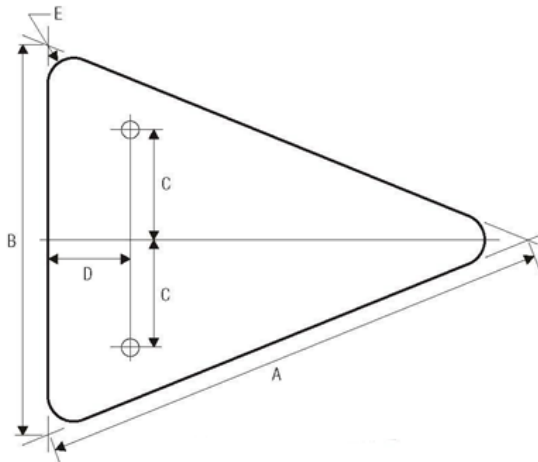

**Columns A & B = Blank Dimensions**

A	B	C	D	E
40	30	7.5	12	1.875
48	36	9	15	2.25


**FIGURE 6 – Circle**

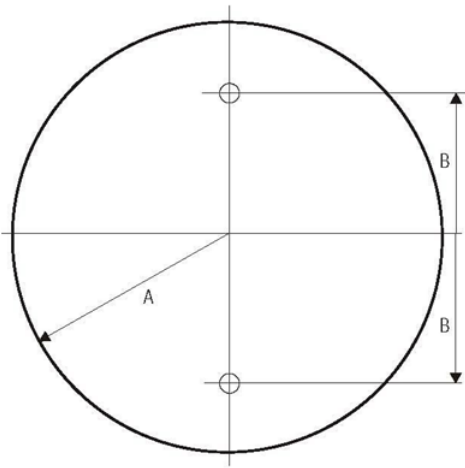

**Column C = Blank Dimensions**

A	B	C
15	12	30
18	15	36


**FIGURE 7 – National Forest Shield**

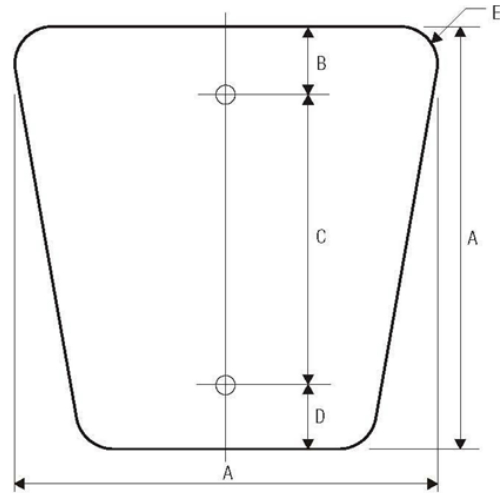

**Column A = Blank Dimensions**

A	B	C	D	E
18	2	15	1	2
24	2.5	20	1.5	2.5


**FIGURE 8 – Square/Diamond (Single Post)**

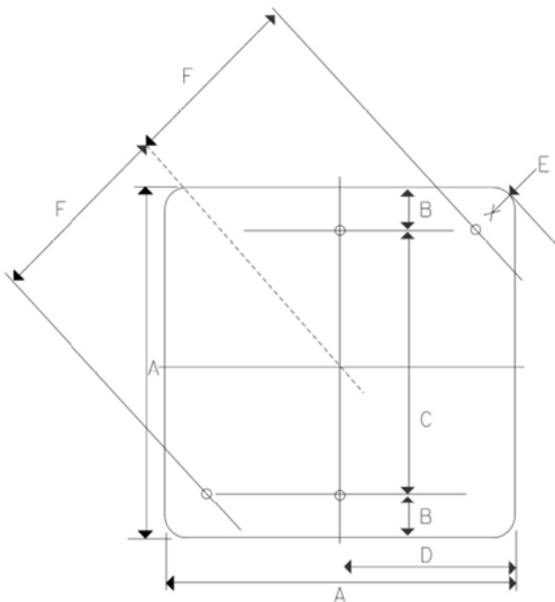


**Column A = Blank Dimensions**

A	B	C	D	E	F
18	3	12	9	1.5	9
24	3	18	12	1.5	12
30	3	24	15	1.875	15
36	3	30	18	2.25	18
48	3	42	24	3	24

**FIGURE 9 – Square (Two Post)**

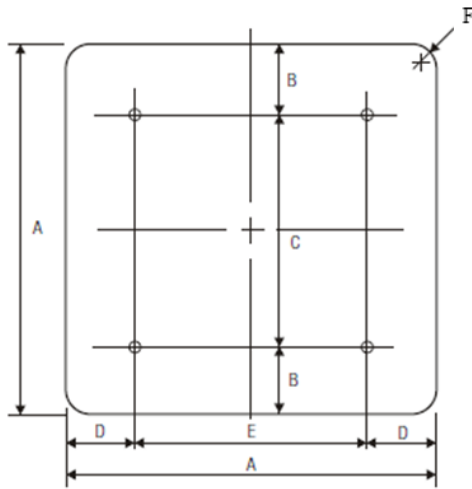

**FIGURE 10 – Diamond (Two Post)**

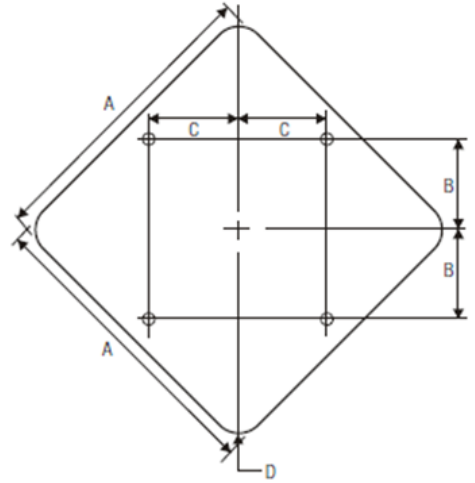


**Columns A & B = Blank Dimensions**


A	B	C	D	E	F
36	6	24	6	24	2.25
48	6	36	9	30	3

A	B	C	D
48	15	15	3
60	18	18	3.75

**FIGURE 11 – Interstate Shield**

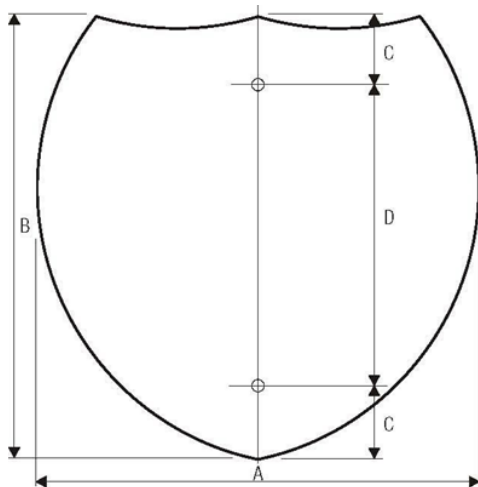

**FIGURE 12 – U.S. Shield**

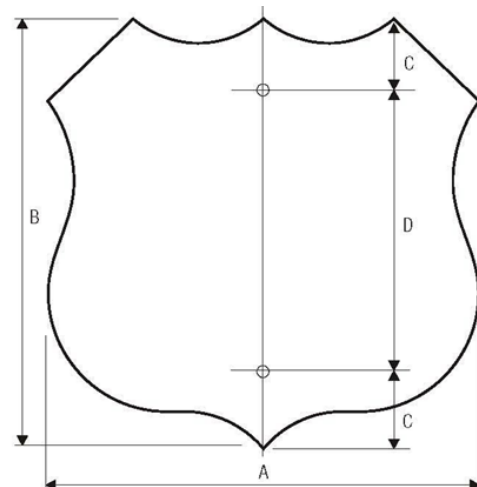


**Columns A & B = Blank Dimensions**

A	B	C	D
24	24	3	18
30	24	3	18
36	36	6	24
45	36	6	24


A	B	C	D
24	24	3	18
30	24	3	18
36	36	6	24
45	36	6	24



**FIGURE 13 – Pentagon (School)**

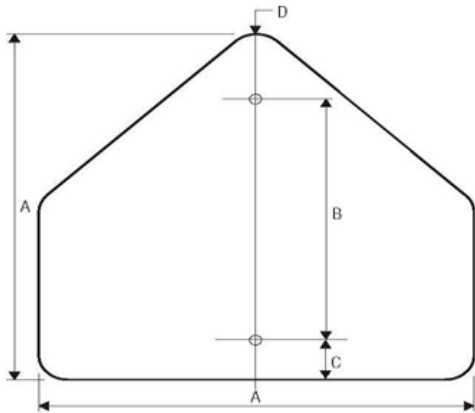

**FIGURE 14 – Parish Shield**

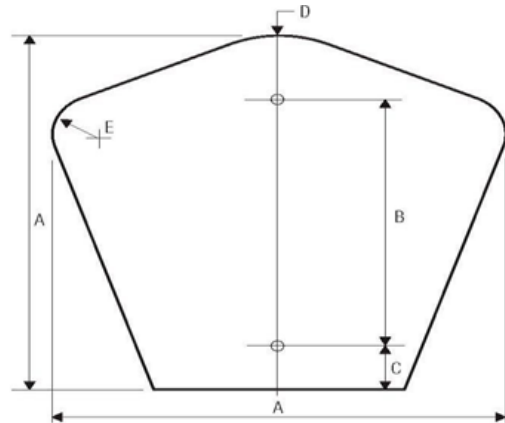

**Columns A & B = Blank Dimensions**

A	B	C	D
30	21	3	1.875
36	24	3	2.25

A	B	C	D	E
18	15	1	5	2
24	18	2	5.313	2.688
30	24	2	6.625	3.375

**SIGN IDENTIFICATION PLACEMENT DETAILS**

**FIGURE 15 – Front or Sign Face**

