



# JEFFERSON PARISH

## PURCHASING DEPARTMENT

CYNTHIA LEE SHENG  
PARISH PRESIDENT

RENNY SIMNO  
DIRECTOR



June 23, 2025

### ADDENDUM # 1

Bid Number: 50-00147989

Receipt Date: June 26, 2025

### Purchase of a Vertical Turbine Pump for the Jefferson Parish Department of Sewerage

#### Questions and Answers:

1. **QUESTION:** Please supply a general arrangement drawing of the existing Fairbanks Morse model 36G, 1 stage pump. The bid documents are not complete without a drawing of the existing pump.

**ANSWER:** Please See Attachment "A"

2. **QUESTION:** Can you please let us know if is this a replacement pump? Can you provide a SN for the installed pump?

**ANSWER:** 1. This is a replacement pump.

2. Serial number - The information tag is thirty-five years old and not legible.

3. **QUESTION:** I have a pump alternate that I think would be an optional replacement. American Marsh pump still produces the same head and flow at a higher efficiency but the discharge head is a 24" flanged and not a 30" like the Fairbanks Morse. Lastly, our pump requires around 6 more feet of NPSH but this should not be a problem if open to atmosphere and around 4-5 feet of water above the bowl.

**ANSWER:** Not approved, on the basis of pump discharge size (24") cannot be changed. This would require major modifications. On pg. 8 under voltage the description it says "all". The specs are very specific, we have 4160 volts available. To change this would also require major modifications. None of these items cannot be modified.

#### Revision:

The Quantity if the Pumps has been revised from 1 to 2 pumps

**\*\*\*PLEASE SEE THE REVISED BID FORM ATTACHED. THIS REVISED FORM MUST BE USED FOR BID SUBMISSION\*\*\***

**\*\*\*PLEASE REMEMBER TO ACKNOWLEDGE THIS ADDENDUM BY NUMBER ON YOUR BID SUBMISSION\*\***

**\*\*\* THE DEADLINE FOR QUESTIONS HAS BEEN REACHED \*\*\***



**JEFFERSON PARISH**  
PURCHASING DEPARTMENT

CYNTHIA LEE SHENG  
PARISH PRESIDENT

RENNY SIMNO  
DIRECTOR



Sincerely,

**Shanna Folse, Purchasing Specialist III**  
**Jefferson Parish Purchasing Department**

**Bidders must acknowledge all addenda on the bid form. Bidder acknowledges receipt of this addendum on the bid form by indicating the addendum number listed above. Failure to list each addenda number on the bid form will result in bid rejection.**


**This addendum is a part of the contract documents and modifies the original bidding documents and specifications. The contents of this addendum shall be included in the contract documents. Changes made by this addendum shall take precedence over the documents of earlier date.**

# Attachment "A"



## WARNING


DO NOT OPERATE THIS MACHINE WITHOUT PROTECTIVE GUARD IN PLACE. ANY OPERATION OF THIS MACHINE WITHOUT PROTECTIVE GUARD CAN RESULT IN SEVERE BODILY INJURY.

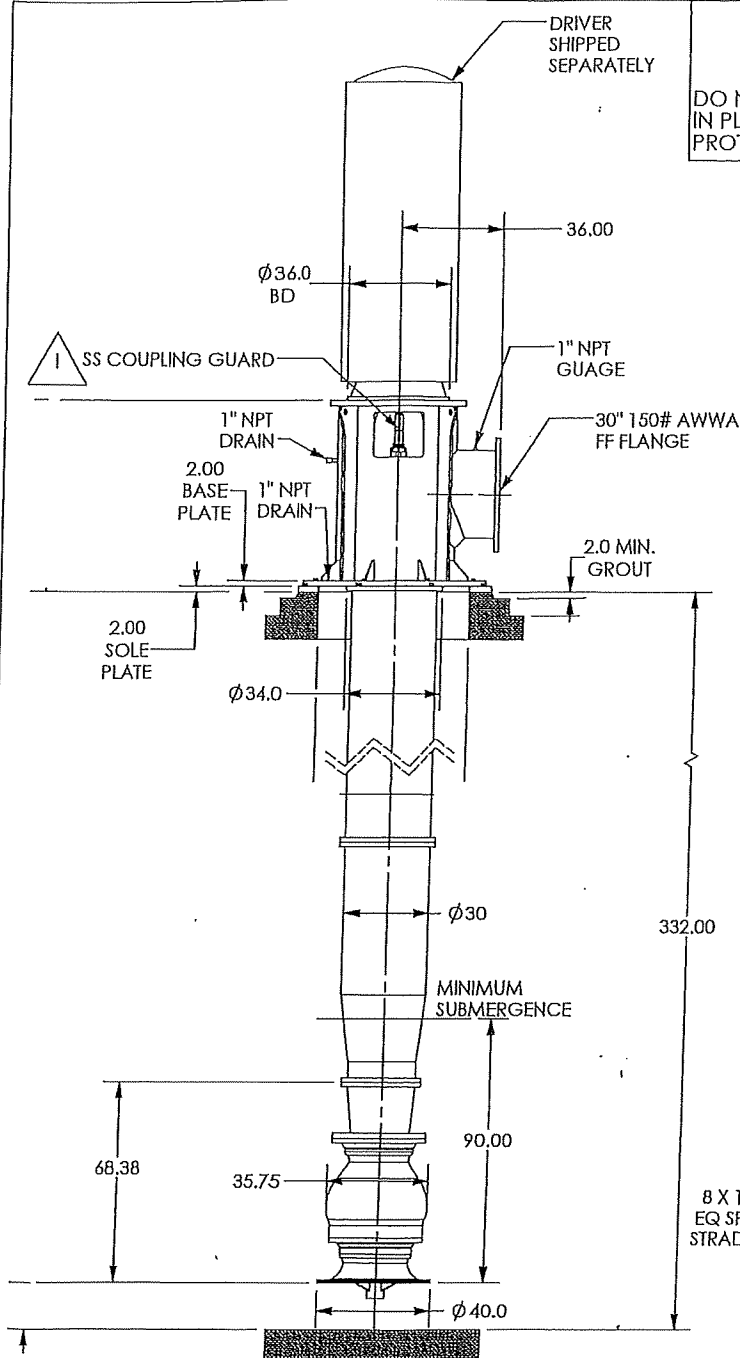

REV1. M11 PE HARNESS DISCHARGE REPLACED WITH 30" FLANGED DISCHARGE  
REV2. SOLE PLATE CORNERS WERE 17 X 17 TITLE BLOCK DESCRIPTION SAID P.E.

Field dimensions must be verified by pump manufacture as per spec.


Pump to be Pentair/Fairbanks Morse as per spec.

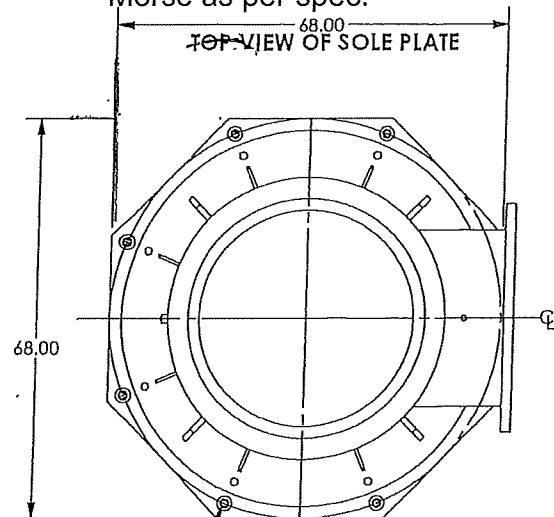

8 X 1.25 ANCHOR HOLES  
EQ SP ON A 68.00 DIA BC  
STRADDLE DISCHARGE C  
FOR 1" ANCHORS

1. NOT FOR CONSTRUCTION OR INSTALLATION UNLESS CERTIFIED. DIMENSIONS SHOWN ARE TYPICAL AND MAY VARY DUE TO NORMAL MANUFACTURING TOLERANCES.
2. CUSTOMER TO VERIFY OVERALL LENGTH PRIOR TO RELEASE FOR MANUFACTURING
3. SOLE PLATE MUST BE SUPPORTED ON ALL SIDES, LEVELED TO .005"/FT IN ALL DIRECTIONS, AND GROUTED IN PLACE.
4. PER ANSI/HI 2.4, THE FOUNDATION MUST BE OF SUFFICIENT MASS AND STIFFNESS TO ALLOW FOR RIGID SUPPORT OF THE PUMP AND THE DISCHARGE PIPING MUST BE PROPERLY ANCHORED, SUPPORTED, AND RESTRAINED NEAR THE PUMP.
5. PER ANSI/HI 9.8, OPERATION WITH A PARTIALLY FILLED SUCTION CAN MAY RESULT IN SURGING
6. DETAIL SHOWN FOR ILLUSTRATION ONLY AND IS NOT INTENDED TO REPRESENT THE ACTUAL INSTALLATION

\*\*SEE PERFORMANCE CURVE FOR CONDITIONS

CUSTOMER JEFFERSON PARISH, LA					P.O. NAME TBD		 <b>PENTAIR</b> <b>FAIRBANKS NIJHUIS</b>	
JOB NAME HARVEY EFFLUENT PUMPING STATION					TAG NAME TBD			
PUMP SIZE AND MODEL 36G	STAGES 1	GPM 22,000	TDH TBD	RPM 900	ROTATION CCW		SETTING PLAN 36G 36" BD X 30" 150# FF FLG, W/SOLE PLATE,VFD,WATER FLUSH	
MOTOR NIDEC	HP 700	FRAME 5813VPA	PHASE 3	HERTZ 60	VOLTS 416	ENCLOSURE WPII		
CERTIFIED FOR SJ			CERTIFIED BY JG		DATE 07/16/24		DWG NO    SP 0914813	REV NO 2

Added per Addendum #1

DATE: 6/23/2025

Page: 6

BID NO: 50-00147989

**BID FORM**  
Non Public Works

**All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form**

All prices must be held firm throughout the entirety of the contract. However, bidders may request that an escalation provision be added to their contract by selecting "yes" below. The escalation provision in the contract will state that only one escalation will be allowed during the term of the contract, and the escalation shall take effect only after the initial 12 month period of the contract. A vendor with an escalation provision in their contract must submit a request in writing to activate the provision, but should not do so any sooner than the first day of the 13th month of their contract. The escalation percentage shall be limited to the most recently published CPI figure issued at the time an adjustment is requested by bidder based on the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure.

Are you requesting an escalation provision?

YES \_\_\_\_\_ NO \_\_\_\_\_

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

**DELIVERY: FOB JEFFERSON PARISH**

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES \_\_\_\_\_

**LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable)** \_\_\_\_\_

**THIS SECTION MUST BE COMPLETED BY BIDDER:**

FIRM NAME: \_\_\_\_\_

ADDRESS: \_\_\_\_\_

CITY, STATE: \_\_\_\_\_ ZIP: \_\_\_\_\_

TELEPHONE: (     ) \_\_\_\_\_

E-MAIL: \_\_\_\_\_

In the event that addenda are issued with this bid, bidders **MUST** acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form by placing the addendum number as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

TOTAL PRICE OF ALL BID ITEMS: \$ \_\_\_\_\_

AUTHORIZED

SIGNATURE: \_\_\_\_\_

Printed Name

TITLE: \_\_\_\_\_

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

**NOTE:** All bids should be returned with the **BID NUMBER** and **BID OPENING DATE** indicated on the outside of the envelope submitted to the Purchasing Department.

REVISED PER ADDENDUM #1

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00147989

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	2.00	EA	<p><b>PURCHASE OF A VERTICAL TURBINE PUMP FOR THE JEFFERSON PARISH DEPARTMENT OF SEWERAGE</b></p> <p>0001 - Fairbanks Morse 36G-1 stage vertical turbine pump with a 30 inches</p> <p>above base fabricated steel discharge head with 150 lbs. flanges, cast iron packing box with packing, flanged adjustable coupling, cast iron suction bell bowl and discharge case, 416 stainless steel bowl, stainless steel bowl wear ring, stainless steel impeller and impeller wear ring, 316 stainless steel hardware, interior and exterior coating of bowl assembly with Tnemec N140 paint, 30 inches carbon steel flanged column pipe, stainless steel line shaft and coupling, bronze line shaft bearings and retainers, Neoprene line shaft bearings</p>	\$	\$
2	1.00	EA	<p>0002 - Nidec vertical solid shaft 700 H.P. motor at 900 RPM, 4160/3/60 power, high thrust, premium efficiency, inverter duty, WPII enclosure, 5813V frame</p> <p>REVISED PER ADDENDUM #1</p>	\$	\$