



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

November 13, 2025

Please find the following addendum to the below-mentioned QUOTE.

Addendum No.: 3

Quote#: 25-57-1

Project Name: Landscaping and Maintenance Service- Justice Center and Tyler Street

Quote Due Date: Thursday, November 20, 2025

GENERAL INFORMATION:

1. Please add Attachment G - Justice Center Complex Irrigation Blueprint to the package.
2. An additional site visit will be held at the St. Tammany Parish Justice Center Complex, 701 N. Columbia St., Covington, La 70433, on Friday, November 14, 2025, at 9:00 AM. The St. Tammany Parish Tyler Street Complex, located at 620 N. Tyler Street, Covington, Louisiana 70433, contains no active irrigation systems. These visits are for irrigation line review only. All questions shall be submitted to procurement@stpgov.org.

QUESTIONS & ANSWERS:

Question 1. What is the desired thickness or how many bales of pine straw mulch is required at each application?

Answer 1. Pine straw shall leave no visible dirt and cover all landscaping beds and tree rings.

Question 2. The is the quantity of red bark mulch required to fulfill the contract ?

Answer 2. Red bark mulch shall be 2 inches in thickness.

Question 3. Can you provide the blue print or schematics of the irrigation system?

Answer 3. Please refer to General Information #1.



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT


Question 4. Regarding the irrigation system : How can we review all lines BEFORE the bid due date?

Answer 4. Please refer to General Information #2.

ATTACHMENTS:

1. Attachment G – Justice Center Complex Irrigation Blueprint.pdf

End of Addendum # 3

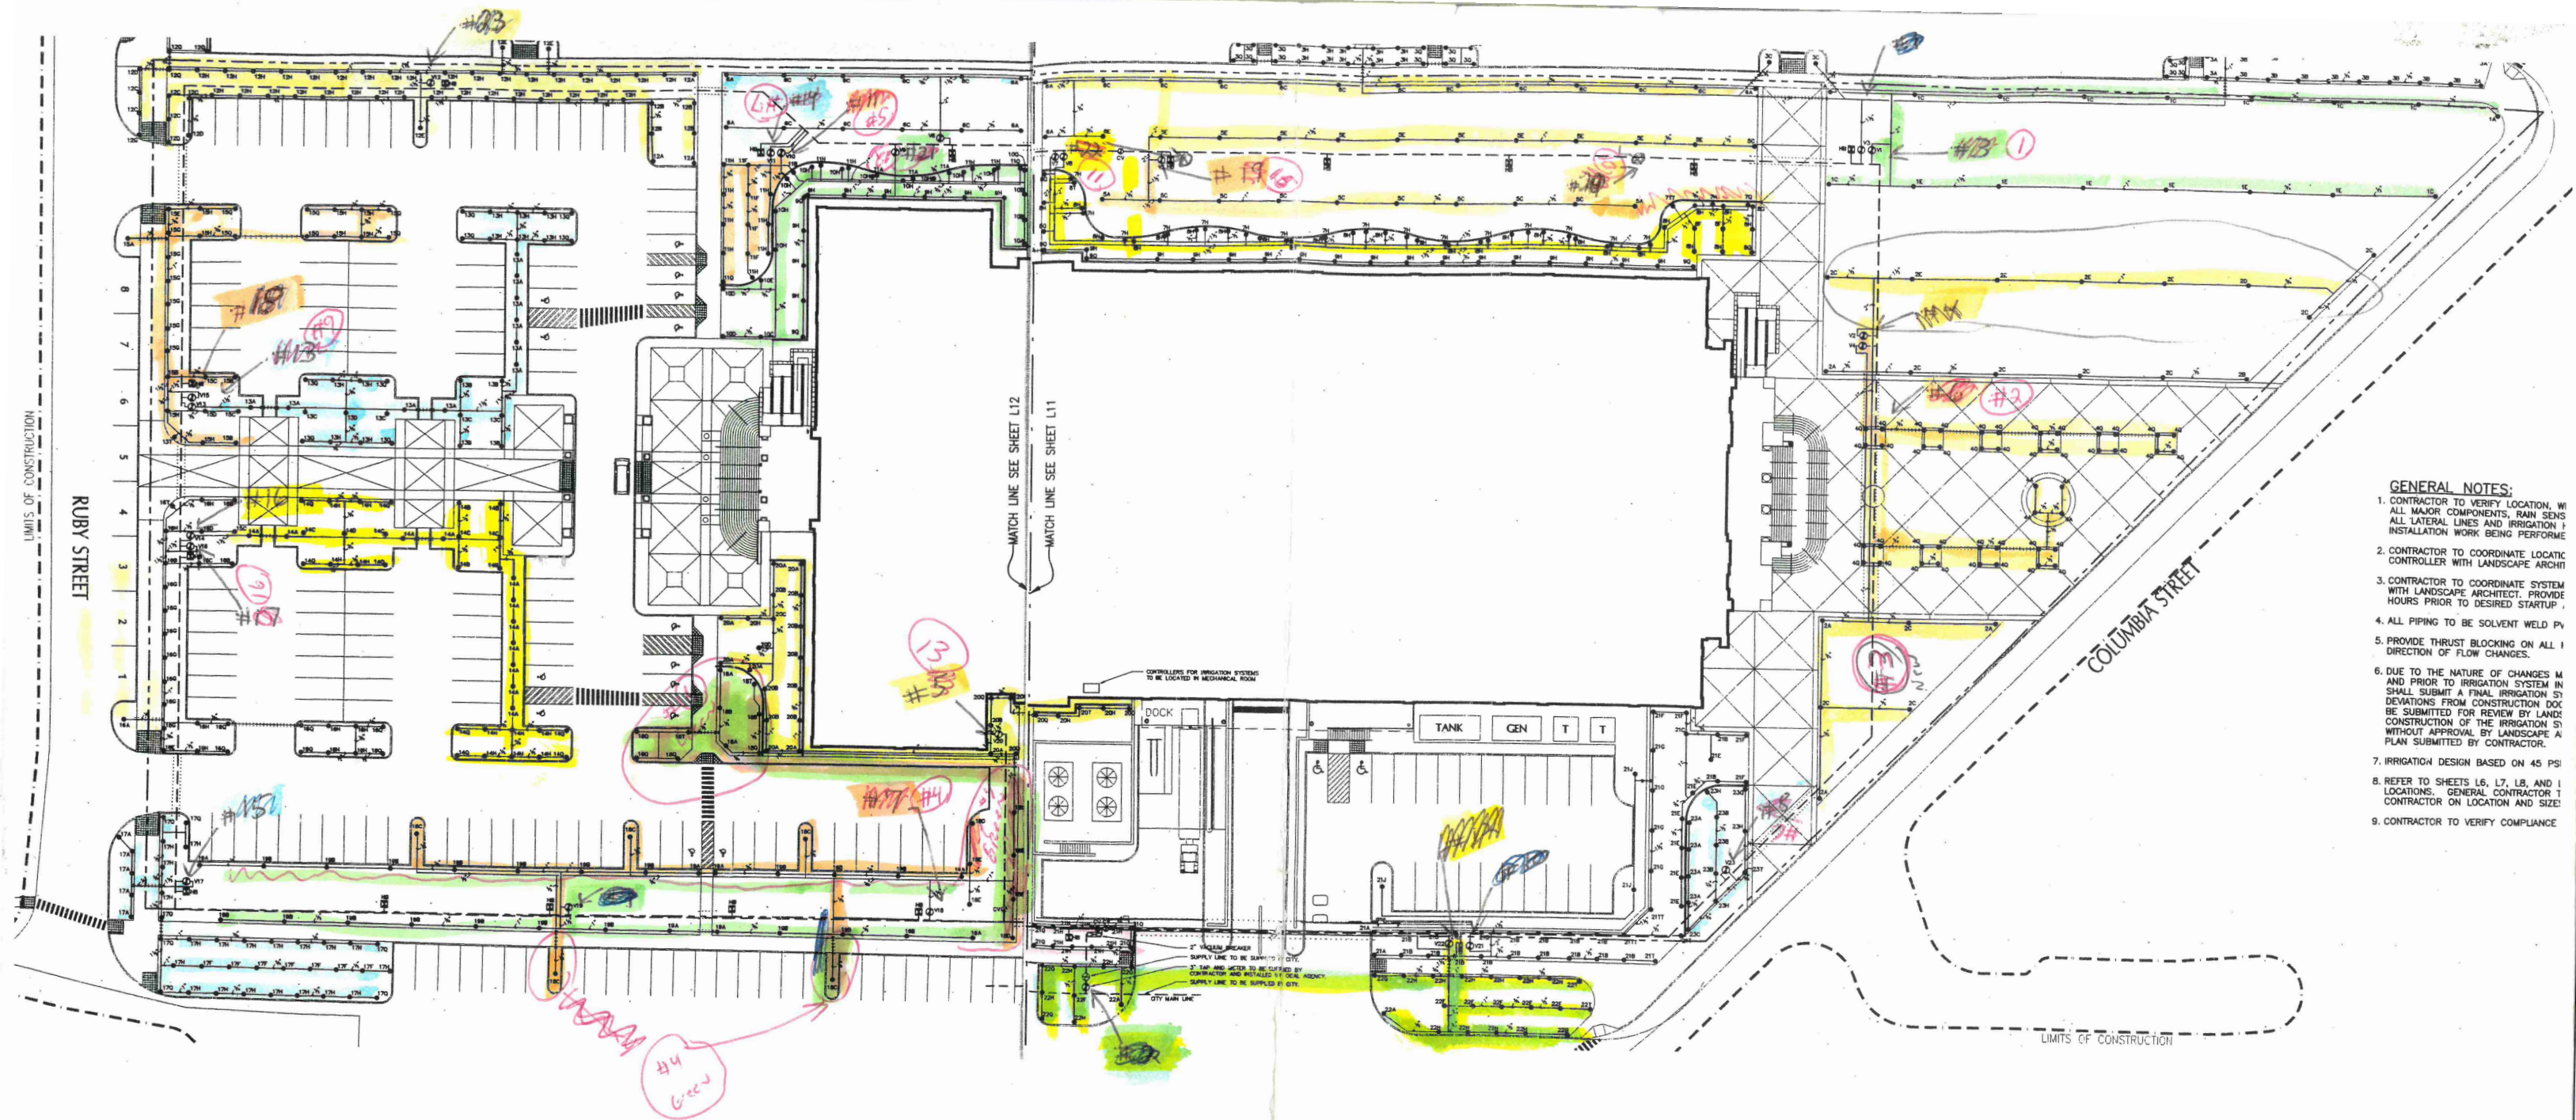

- GENERAL NOTES:**
1. CONTRACTOR TO VERIFY LOCATION, WITH ALL MAJOR COMPONENTS, RAIN SENS, ALL LATERAL LINES AND IRRIGATION INSTALLATION WORK BEING PERFORMED.
 2. CONTRACTOR TO COORDINATE LOCATING CONTROLLER WITH LANDSCAPE ARCHITECT.
 3. CONTRACTOR TO COORDINATE SYSTEM WITH LANDSCAPE ARCHITECT. PROVIDE HOURS PRIOR TO DESIRED STARTUP.
 4. ALL PIPING TO BE SOLVENT WELD P.V.
 5. PROVIDE THRUST BLOCKING ON ALL 1 DIRECTION OF FLOW CHANGES.
 6. DUE TO THE NATURE OF CHANGES AND PRIOR TO IRRIGATION SYSTEM IN SHALL SUBMIT A FINAL IRRIGATION SYSTEM DEVIATIONS FROM CONSTRUCTION DOCUMENTS FOR REVIEW BY LANDSCAPE ARCHITECT. WITHOUT APPROVAL BY LANDSCAPE ARCHITECT, NO CONSTRUCTION OF THE IRRIGATION SYSTEM SHALL BE SUBMITTED BY CONTRACTOR.
 7. IRRIGATION DESIGN BASED ON 45 PSI.
 8. REFER TO SHEETS L6, L7, L8, AND L9 LOCATIONS. GENERAL CONTRACTOR TO CONTRACTOR ON LOCATION AND SIZE.
 9. CONTRACTOR TO VERIFY COMPLIANCE.

⑧ - could not find?
⑭ - could not find?

5
7 - working
21
12 - ckt. found (not wkg)
10
11
15

Zone 10 - short
Zone 6 - short
Zone 15 - short