



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

September 16, 2026

Please find the following addendum to the below-mentioned BID.

Addendum No.: 1

Bid#: 26-40-2

Project Name: Nolan Rd Ph 2

Bid Due Date: Tuesday, September 22, 2026

GENERAL INFORMATION:

1. Please add Section 13 – Project Details (attached).

QUESTIONS & ANSWERS:

Question 1. Can you confirm that the contractor is to clear any trees within right of way or is it just trees that interfere with drainage path?

Answer 1. Use whatever means and methods necessary to complete the project. However, the Parish prefers not every tree in the right of way be cut unless it interferes with the drainage path it needs to be removed.

Question 2. Is the contractor to brace telephone poles or will they be moved prior to project start?

Answer 2. Please refer to Section 12 – Construction Drawings, Sheet 1a, Note #2 under “Utilities”.

Question 3. Can you advise what to do with telephone pedestals? Some of the pedestals seems very close to drainage path, not to mention possible underground cables that could be a conflict.

Answer 3. Please refer to Section 12 – Construction Drawings, Sheet 1a, Note #2 under “Utilities”.

Question 4. Are the contractors allowed to remove any fence as long as it's replaced with in kind fence?



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT


- Answer 4.** Please refer to Section 12 – Construction Drawings, Sheet 1a, Note # 14 under “General Notes”. If removing fence is necessary, yes, but right of entry must be acquired and the fence must be replaced in like kind.
- Question 5.** What is the box shaped structures the pipe structure 142 is going through at station 28+00 on sheet 7?
- Answer 5.** Existing catch basin top that is to be removed. Not applicable to the proposed drainage.
- Question 6.** On page 4 you state “Req’d mil asphalt pavement for overlay tie in.” What item should that be included in for payment?
- Answer 6.** Item # 202-01-00100 Removal of Structures & Obstructions.
- Question 7.** Is the pavement patching item just for the 2 cross drain locations or is there other locations?
- Answer 7.** It is for the 2 cross drain location, as well as any locations indicated by the project inspector that need patching.
- Question 8.** Can you provide a detail for the required sewer tie ins? Also, which item will that be paid in?
- Answer 8.** Please refer to General Information #1.
- Question 9.** Are we allowed to use excavated material as embankment?
- Answer 9.** Yes, as long as it does not interfere with compacted pipe backfill. Please refer to General Information #1.
- Question 10.** For the concrete you state it has to be fiber reinforced, do you mean macrofibers or microfibers?
- Answer 10.** Macrofibers.

ATTACHMENTS:


1. Section 13 – Project Details.pdf

End of Addendum # 1

TYPICAL DITCH GRADING SECTION

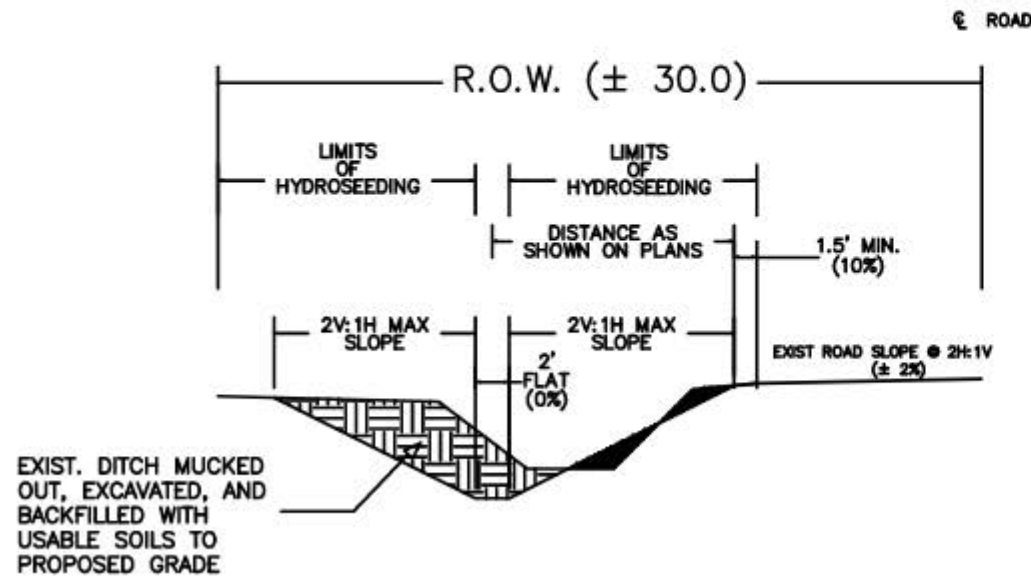


PIPE INSTALLATION DETAIL

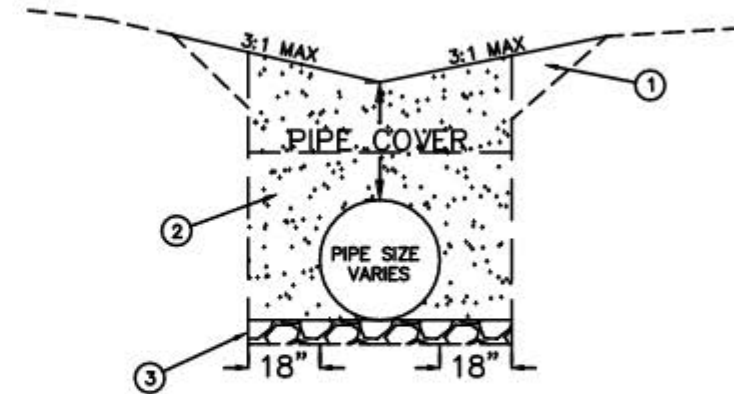

- ① BORROW MATERIAL
- ② TYPE A COMPACTED BACKFILL (STONE, RPCC, OR FLOWABLE FILL) UNDER ROAD SURFACE
TYPE B COMPACTED BACKFILL (SELECTED SOILS, GRANULAR MATERIAL, OR THE ABOVE) ELSEWHERE
BACKFILL SHALL BE COMPACTED IN 8" MAXIMUM LIFTS
- ③ BEDDING MATERIAL (STONE, RPCC, OR SAND-AGGREGATE MIX), 6" THICK

PROFILE VIEW: PIPE END SLOPES

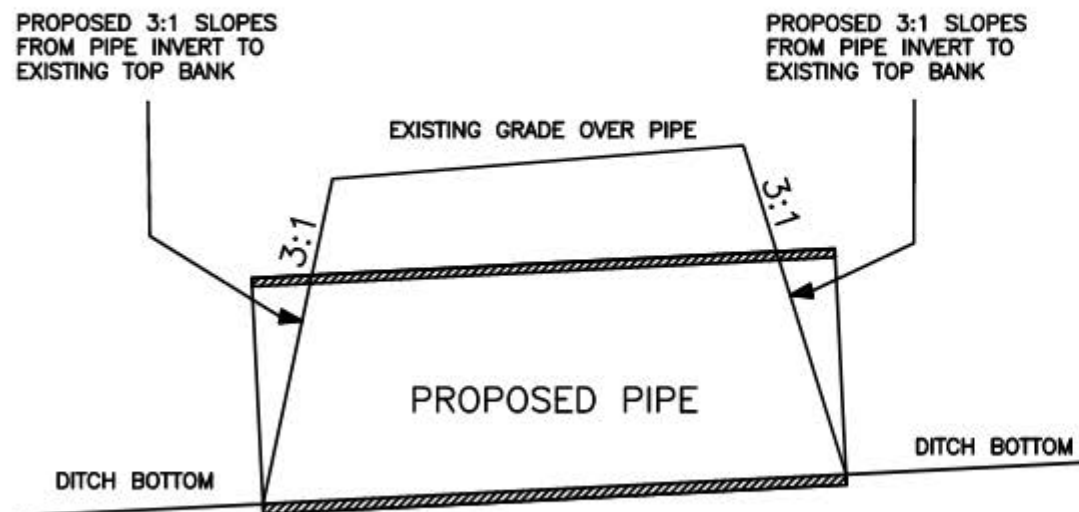

SEWER EFFLUENT PIPE TIE-IN

