



July 31, 2026

Addendum No. 01

Your reference is directed to LPSO139-2026 for the Invitation to Bid (ITB) on Lafourche Parish Sheriff's Office uniforms, which is currently scheduled to open at 2:00 PM on August 17, 2026.

The following are the Vendor's inquiries received by the deadline date of July 24, 2026 and the Lafourche Parish Sheriff's Office Responses.

Vendor Question #1:

Attachment B - Specifications

Reference: Bid Specifications/Page 2 – Cotton Alternate Deputy/Civil Deputy 4 Pkt Trousers-Men/Women/Design and Construction item 14
Page 53 – Women's Trousers-Class A/Style
Page 57 – Men's Trousers-Class A/Style

Please confirm the piggy back stripe color of ½" navy on ¾" lemon yellow.

Lafourche Parish Sheriff's Office Response #1:

Bid Specifications on pages: Page 2/Design and Construction item 14 is revised to read:

Piggy back stripe down seam of legs beginning at base of pocket. Striping: The striping is ½" Mariners navy polyester on ¾" Yellow gold polyester.

Bid Specifications on pages 53/Style, and Page 57/Style, the stripping descriptions are revised to read:

Piggy back stripe color is ½" Mariners navy on ¾" lemon yellow.

Vendor Question #2:

Reference Documents: Attachment C – Bid Sheet and Attachment B – Uniform Specifications

Please confirm Brand for items 13 through 16, ordering of items 17 through 21, and brand for item 42 and 43.

Lafourche Parish Sheriff's Office Response Question #2:

Attachment C – Bid Sheet; items 13 through 16 are revised to include: Flying Cross 57500 2-IN-JACKET or equivalent.

Attachment B-Bid Specifications page 3 is revised to include: Flying Cross 57500 2-IN-JACKET or equivalent.
COLOR: LAPD Navy

Attachment C – Bid Sheet, items 17 through 21, are revised to include strike through marks on each line signifying the removal from the bid.

Attachment B-Bid Specifications pages 5 through 10 are revised to include strike through marks on each page signifying the item's removal from the bid.

Attachment C – Bid Sheet, items 42 and 43, are revised to remove Brand A+ Supply, and include Cobmex 4018.

Attachment B-Bid Specifications page 18 is revised to remove Brand A+ and include Cobmex 4018.



Vendor Question #3:

LPSO139-2026 - Uniforms

Reference Document: Uniforms – 2026 page 5/Delivery

Please clarify the eight-hour emergency delivery requirement. Uniforms must first be ordered in the correct size and often embroidered, making that timeframe impractical. Most agencies keep a small stock of common sizes for emergencies. Would that be acceptable, or would the eight-hour delivery requirement apply only to undecorated items already in stock?

Lafourche Parish Sheriff's Office Response Question #3:

On Page 5/Delivery – Delivery section is revised to read:

Delivery shall be on an as needed basis, and shall be delivered within ten working days from the date of order. Lafourche Parish Sheriff's Office may make emergency purchases with delivery requested within an eight-hour period. While Vendor is responsible for making timely deliveries in accordance with bid proposal delivery terms, exceptions will be evaluated for events, disruptions, or delays that occur outside of the vendor's control.

Vendor Question #4:

LPSO139-2026 - Uniforms

Reference Document: Uniforms – 2026 page 5/Delivery

Is there an exception for an out-of-state vendor that cannot meet the eight-hour emergency delivery requirement?

Lafourche Parish Sheriff's Office Response Question #4:

Please see Lafourche Parish Sheriff's Office Response to Question 2

Vendor Question #5:

LPSO139-2026 - Uniforms

Reference Document: Uniforms – 2026 page 5/Prices

Must renewal-year pricing remain unchanged for the full potential four-year term?

Lafourche Parish Sheriff's Office Response Question #5:

Bid Documents now include the addition of Attachment D – Price Adjustment Clause

LPSO139-2026 – Uniforms, page 13/Bid Checklist

Bid Checklist is revised to read:

***AT A MINIMUM, THE BELOW FOUR (4) ITEMS MUST BE RETURNED WITH THE BID OR YOUR BID WILL BE DISQUALIFIED. ***

And the addition of box 4:

***☐ Signed Price Adjustment Form.**

LPSO139-2026 – Uniforms-page 5/Prices – Prices section is revised to read the following and add sections:

Price Structure and **Price Review** below:

Bid prices must be complete and shall include delivery of all items F.O.B. destination or as otherwise provided. Unit shall be inclusive of freight charges and/or fuel surcharge.



Bids containing "Payment in advance" or C.O.D. requirements may be rejected. It shall be agreed and understood that the price quoted must be a firm price for the original contractual period of twenty-four (24) months, and shall not be subject to change at the time of shipment or delivery. **Prices shall be quoted in the unit (each, box, case, etc.) as specified in the bid.**

PRICE REVIEW

- Periodically throughout the term of the contract, LPSO has the right to conduct market research, review pricing indexes, and use other resources to review and verify contract pricing, vendor requested increases, and vendor provided information.
- If a price increase is requested by the vendor, LPSO will consider the request, provided the vendor can supply ample justification and market-based evidence to support the requested price increase. LPSO **shall** have the right to require additional documentation and evidence from the vendor pertaining to the requested increase, and the vendor **must** comply with any LPSO request.
- Increases solely to increase profit or margins **shall not** be considered.
- LPSO, at its sole discretion, has the right to approve or deny the request based on LPSO's verification and has the right to negotiate with vendor on the requested increase. Vendor may include in their documentation evidence of price impacts on any component of contract delivery including but not limited to materials, transportation, labor, unforeseen statutory or regulatory mandates, or other impacts. Inclusion by the vendor DOES NOT guarantee an approved price adjustment. Approval in part or in total will be at LPSO's sole discretion.
- In the event a price change is authorized by LPSO, said prices **must** remain firm for a period of not less than twelve (12) months.
- In the event of a price decrease, LPSO **shall** be guaranteed full benefit of the price reduction for all orders on the effective date of the decrease and thereafter.

PRICE STRUCTURE

- If, during the contract term, the vendor is unable or unwilling to meet contractual requirements in whole or in part based on the price structure of the contract, the vendor **shall** immediately notify the LPSO Procurement Department in writing. The notification shall specify the contractual requirements which cannot be met and the offending price. Such notification **shall not** relieve the vendor of its responsibilities under the contract. LPSO may, but is not required to, consider an equitable adjustment in the contract terms and/or pricing.
- If LPSO, in its sole discretion, determines during the contract term that (i) the contract price structure is unworkable, detrimental, or injurious to the utility, or (ii) the contract price structure results in prices which are unreasonable, excessive, or not truly reflective of current market conditions, and no adjustment in the contract terms and/or pricing is mutually agreeable, LPSO may terminate the contract upon not less than five days' written notice to the vendor. The effective date of termination **shall** be as specified in the written notification.



and the addition of Attachment D – Price Adjustment Form

Vendor Question #6:

LPSO139-2026 - Uniforms

Reference Document: Uniforms page 4/**Use of Brand Names and Stock Numbers**

Is catalog evidence required for every quoted product for only equivalents and the reversible jacket?

Lafourche Parish Sheriff's Office Response Question #6:

Please see requirements on page 4-Section: Use of Brand Names and Stock Numbers. "If bidder proposes to supply an equivalent product, then the bidder must provide, with bid submittal, the name of the brand, make, manufacturer, complete product specifications, and sufficient literature, brochures, etc. needed to prove equality."

Vendor Question #7:

LPSO139-2026 - Uniforms

Per FOIA, can you provide the current catalog pricing?

Lafourche Parish Sheriff's Office Response Question #7:

There is no current contract due to market volatility during COVID and recovery from hurricanes Ida and Francine. Prior bid was in 2018.

Vendor Question #8:

LPSO139-2026 - Uniforms

Can you provide the current vendor providing services?

Lafourche Parish Sheriff's Office Response Question #8:

Services are currently provided by Vinson Uniforms.

Vendor Question #9:

LPSO139-2026 - Uniforms

Can you provide the current prices paid on the present contract?

Lafourche Parish Sheriff's Office Response Question #9:

Please see response to question 7.

Vendor Question #10:

LPSO139-2026 - Uniforms

How many employees are served under this contract?

Lafourche Parish Sheriff's Office Response Question #10:

We currently have 389 active employees, and 74 reserve members.

Vendor Question #11:



LPSO139-2026 – Uniforms

Reference Document: Uniforms – 2026 page 8/Estimated Quantity

What are the total expenditures for the current contract over the last three years?

Lafourche Parish Sheriff's Office Response Question #11:

Lafourche Parish Sheriff's Office does not have an active contract for uniforms. Purchases over the last three years total \$232,141.92.

Vendor Question #12:

LPSO139-2026 – Uniforms

Reference: Attachment B - Specifications

Are on-site uniform measuring and fitting services needed?

Lafourche Parish Sheriff's Office Response Question #12:

No. All measurements and fitting services are handled internally.

Vendor Question #13:

LPSO139-2026 - Uniforms

Reference Document: Attachment B - Specifications

Are services such as sewing, hemming, an alteration required?

Lafourche Parish Sheriff's Office Response Question #13:

Please see Attachment B – Specifications for the sewing, hemming, and/or alterations required for each bid item.

Vendor Question #14:

LPSO139-2026 - Uniforms

Reference Document: Attachment B - Specifications

Do you require screen printing for any of these items?

Lafourche Parish Sheriff's Office Response Question #14:

Screen printing is not used for any item listed on this bid.

Vendor Question #15:

LPSO139-2026 - Uniforms

Reference Document: Uniforms – 2026 page 8/Estimated Quantities

Are the quantities estimated for annual usage or full the full term?

Lafourche Parish Sheriff's Office Response Question #15:

Quantities are estimates for annual usage.

All else remains as on original Invitation to Bid.



This addendum is hereby officially made a part of the referenced solicitation.

Acknowledgement: If you have already submitted your bid and this Addendum does not cause you to revise your bid, you should acknowledge receipt of this Addendum by identifying your business name and by signing where indicated. You may return this Acknowledgement by mail to: Lafourche Parish Sheriff's Office, Purchasing Department, P.O. Box 5608, Thibodaux, LA 70302, or by hand to delivery to: 404 Green St., Thibodaux, LA 70301. Lafourche Parish Sheriff's Office reserves the right to request a completed Acknowledgement at any time. Failure to execute an Acknowledgement shall not relieve the bidder from complying with the terms of its bid.

Addendum Acknowledged/No changes:

For: _____ By: _____

Revision: If you have already submitted your bid and this Addendum requires you to revise your bid, you must indicate any change(s) below, identify your business name and sign where shown. Revisions shall be delivered prior to bid opening by mail to: Lafourche Parish Sheriff's Office, Purchasing Department, P.O. Box 5608, Thibodaux, LA 70302, or by hand delivery to: 404 Green St., Thibodaux, LA 70301. Electronic transmissions are not being accepted at this time.

Revisions received after bid opening shall not be considered and you shall be held to your original bid.

Revision:

For: _____ By: _____

By: Venita Dantin
Lafourche Parish Sheriff's Office
Purchasing Department
Telephone No. 985-449-4438
e-mail: venita.dantin@lpsso.net

LAFOURCHE PARISH SHERIFF'S OFFICE



Bid # LPS0139-2026

UNIFORMS

Bid Designation: ELECTRONIC BID



**Bid LPSO139-2026
UNIFORMS**

Bid Number LPSO139-2026
Bid Title UNIFORMS
Bid Start Date July 17, 2026
Bid End Date August 17, 2026
Bid Contact Venita Dantin
Purchasing Manager
Finance Department
985-449-4438
venita.dantin@lpsa.net

Bid Comments

The Lafourche Parish Sheriff's Office is requesting electronic bids for the purchase of **UNIFORMS**. Pricing for this bid will be effective **for a period of twenty-four (24) months with two (2) twelve (12) month renewal options**.

ELECTRONIC RESPONSES will be received until **August 17, 2026, AT 2:00 PM CST** at which time they shall be opened at Lafourche Parish Sheriff's Office, 1300 Lynn St, Thibodaux, LA 70301 (985) 449-4438.

NO RESPONSES WILL BE RECEIVED AFTER 2:00 pm CST.

The attached document contains a description of the products and specifications that are required to be met.

Uniforms bids are to be submitted ELECTRONICALLY online at www.publicpurchase.com. By submitting an electronic response, you MUST attach required forms listed on the RFQ Checklist form.

RESPONSES WILL NOT BE ACCEPTED IN PAPER FORMAT.

Bids submitted electronically must, when required, include a digital signature as required by Louisiana State Law.

Before submittal of your bid, verify all required forms on the RFQ Checklist are completed and included with submission. (Checklist can be found on the last page of the solicitation.)

Attachments:

Advertisement

Attachment A – Insurance Requirements, Pages 1-2

Attachment B – Specifications, Pages 1-84

Attachment C - Pricing sheet, Pages 1-24

Publish Dates:

July 17, 2026

July 24, 2026



General Terms and Conditions

Electronic bids for Uniforms are to be received by the Lafourche Parish Sheriff's Office Purchasing Department, 1300 Lynn St, Thibodaux, LA 70301, until the date and hour specified on the "**Bid Comment**" section of the bid packet, at which time they will be publicly opened. **Late bids will not be accepted.**

Read the entire bid. All bids submitted are subject to these general terms and conditions and any special conditions and specifications contained herein, all of which are made part of the bid. **Prices are to be typed on the Excel Spreadsheet and returned as an Excel document. Handwritten prices scanned to the bid will NOT be accepted.**

By utilizing the **Bid Checklist**, provided within the bid packet, you will ensure that your bid is in compliance with the Lafourche Parish Sheriff's Office's requirements.

Submittal of Bids

In accordance with LRS 38:2212.1(4) (a), the Lafourche Parish Sheriff's Office offers bidders the ability to respond to this bid **electronically**. Bids will be accepted in **electronic** form online at www.publicpurchase.com. Vendors interested in submitting bids electronically must register through publicpurchase.com (fees may apply).

Bids submitted electronically must include a digital signature as required by Louisiana State Law.

This bid has been designated as an Electronic Bid only. BIDS WILL NOT BE ACCEPTED IN PAPER FORMAT. Prices are to be typed on the Excel spreadsheet and returned as an Excel Spreadsheet. Handwritten prices scanned to the bid will NOT be accepted.

Proper Form and Authorization

Bids are to be electronically signed by a member of the firm or authorized representative. In the event that a correction needs to be made, the correction should be initialed by the vendor and made in such a manner that the information contained on the bid form can be fairly and reasonably discerned and ascertained. The Lafourche Parish Sheriff's Office shall have the right to reject any bid in the event that it is unable to reasonably determine the information and quotations supplied by the bidder as a result of the manner and method by which the bidder has completed the bid form.

Bidder is solely responsible for the timely delivery of its bid. Failure to meet the bid opening date & time shall result in rejection of the bid.

Calendar of Events:

Deadline to receive written inquiries:	July 24, 2026
Deadline to answer written inquiries:	July 31, 2026
Bid Opening Date and Time:	August 17, 2026 <u>2:00 PM CST</u>



NOTE: Lafourche Parish Sheriff's Office reserves the right to revise the calendar. Revisions before the bid opening date and time, if any, will be formalized by the issuance of an addendum to this bid.

Bidder Inquiries:

The Sheriff's Office shall not and cannot permit an open-ended inquiry period, as this creates an unwarranted delay in the procurement cycle and operations of our agency customers. The Sheriff's Office reasonably expects and requires responsible and interested bidders to conduct their in-depth bid review and submit inquiries in a timely manner.

An inquiry period is hereby firmly set for all interested bidders to perform a detailed review of the bid documents and to submit any written inquiries relative thereto. *Without exception*, all inquiries **MUST** be submitted in writing by an authorized representative of the bidder, clearly cross-referenced to the relevant bid section. All inquiries must be received by the Inquiry Deadline date set forth in the Calendar of Events section of this bid. Only those inquiries received by the established deadline shall be considered by the Sheriff's Office. Inquiries concerning this bid may be delivered by mail, express courier, e-mail, hand, or fax to:

Lafourche Parish Sheriff's Office
Attention: Venita Dantin
PO Box 5608
Thibodaux, LA 70302

e-mail: venita.dantin@lpso.net

Phone: (985) 449-4438

Only the person identified above or their designee has the authority to officially respond to bidder's questions on behalf of the Sheriff's Office. Any communications from any other individuals are not binding to the Sheriff's Office.

An addendum will be issued and posted on www.publicpurchase.com, to address all inquiries received and any other changes or clarifications to the bid. Thereafter, all bid documents, including but not limited to the specifications, terms, conditions, plans, etc., will stand as written and/or amended by any addendum. No negotiations, decisions, or actions shall be executed by any bidder as a result of any oral discussions with any Sheriff's office employee or consultant. It is the Bidder's responsibility to check the Public Purchase website frequently for any possible addenda that may be issued. The Lafourche Parish Sheriff's Office is not responsible for a bidder's failure to download any addenda documents required to complete the bid.

Use of Brand Names and Stock Numbers

The product specifications set forth by this bid invitation are described and made pursuant to LRS 38:2212.1 (C) (1) and (2). Wherever in the specifications the name of a certain brand, make, manufacturer, or definite specification is utilized, it is only to denote the quality standard of product desired, and does not restrict bidders to the specific brand, make, manufacturer or specification name. The named brand, make, manufacturer or definite specification is utilized only to set forth and convey to prospective bidder's the general style, type, character, and quality of product desired; and that equivalent products will be acceptable. If a bidder proposes to supply an equivalent product, then the bidder must provide, with bid submittal, the name of the brand, make, manufacturer, complete product specifications, and sufficient literature, brochures, etc. needed to prove equality.



LAFOURCHE PARISH SHERIFF'S OFFICE RESERVES THE RIGHT TO PURCHASE ANY ITEM FROM STATE CONTRACT.

Louisiana Preferences

As directed under Louisiana Revised Statute Title 38:2251, a preference is hereby given to materials, supplies and provisions, produced, and manufactured in LOUISIANA, quality being equal to articles offered by competitors outside the State. In order to receive consideration for Louisiana preference, the Louisiana Preference Claim Form included in bid packet must be completed, signed, and submitted with bid proposal, if applicable. If submitting bid electronically the web form must be completed.

Taxes

In accordance with LA R.S. 47:301(8) (c), the Lafourche Parish Sheriff's Office is exempt from State and local sales tax.

Payment Terms

LPSO payment terms are **Net 30 after receipt of order.**

Insurance Requirements

See Attachment A for insurance requirements. You may submit your certificate of insurance with your bid, or upon notification that you will win an award you will have five (5) business days to get the certificate to the Purchasing Department.

Errors or Omissions

LA R.S. 38:2214 (C) allows for the withdrawal of bids that contain patently obvious, unintentional, or substantial mechanical, clerical or mathematical errors or omissions. The bidder may withdraw the bid if convincing sworn, written evidence of such errors is furnished to the Lafourche Parish Sheriff's Office within forty-eight (48) hours of the bid opening, excluding weekends and legal holidays. Any bidder who attempts to withdraw a bid under this provision will not be allowed to resubmit a bid under same bid proposal.

Prices

Bid prices must be complete and shall include delivery of all items F.O.B. destination or as otherwise provided. Unit shall be inclusive of freight charges and/or fuel surcharge.

*Bids containing "Payment in advance" or C.O.D. requirements may be rejected. It shall be agreed and understood that the price quoted must be a firm price for the original contractual period of twenty-four (24) months, and shall not be subject to change at the time of shipment or delivery. **Prices shall be quoted in the unit (each, box, case, ect.) as specified in the bid.***

Price Review

- *Periodically throughout the term of the contract, LPSO has the right to conduct market research, review pricing indexes, and use other resources to review and verify contract pricing, vendor requested increases, and vendor provided information.*



- *If a price increase is requested by the vendor, LPSO will consider the request, provided the vendor can supply ample justification and market-based evidence to support the requested price increase. LPSO **shall** have the right to require additional documentation and evidence from the vendor pertaining to the requested increase, and the vendor **must** comply with any LPSO request.*
- *Increases solely to increase profit or margins **shall not** be considered.*
- *LPSO, at its sole discretion, has the right to approve or deny the request based on LPSO's verification and has the right to negotiate with vendor on the requested increase. Vendor may include in their documentation evidence of price impacts on any component of contract delivery including but not limited to materials, transportation, labor, unforeseen statutory or regulatory mandates, or other impacts. Inclusion by the vendor **DOES NOT** guarantee an approved price adjustment. Approval in part or in total will be at LPSO's sole discretion.*
- *In the event a price change is authorized by LPSO, said prices **must** remain firm for a period of not less than twelve (12) months.*
- *In the event of a price decrease, LPSO **shall** be guaranteed full benefit of the price reduction for all orders on the effective date of the decrease and thereafter.*

Price Structure

- *If, during the contract term, the vendor is unable or unwilling to meet contractual requirements in whole or in part based on the price structure of the contract, the vendor **shall** immediately notify the LPSO Procurement Department in writing. The notification shall specify the contractual requirements which cannot be met and the offending price. Such notification **shall not** relieve the vendor of its responsibilities under the contract. LPSO may, but is not required to, consider an equitable adjustment in the contract terms and/or pricing.*
- *If LPSO, in its sole discretion, determines during the contract term that (i) the contract price structure is unworkable, detrimental, or injurious to the utility, or (ii) the contract price structure results in prices which are unreasonable, excessive, or not truly reflective of current market conditions, and no adjustment in the contract terms and/or pricing is mutually agreeable, LPSO may terminate the contract upon not less than five days' written notice to the vendor. The effective date of termination **shall** be as specified in the written notification.*

Delivery

Delivery shall be on an as needed basis, and shall be delivered within ten working days from the date of order. Lafourche Parish Sheriff's Office may make emergency purchases with delivery requested within an eight-hour period. While Vendor is responsible for making timely deliveries in accordance with bid proposal delivery terms, exceptions will be evaluated for events, disruptions, or delays that occur outside of the vendor's control.



Failure to deliver as promised including shorted deliveries will be considered a default by the vendor and may cause cancellation of the contract. Lafourche Parish Sheriff's Office reserves the right to purchase any or all products covered by the contract on the open market and to charge the contractor with the cost in excess of the contract price. Until such assessed charges have been paid, no subsequent bid from the defaulting contractor will be considered.

Vendor shall promptly notify Lafourche Parish Sheriff's Office Purchasing Department of any unforeseen delays beyond its control. Deliveries must be available to Lafourche Parish Sheriff's Office located at 1300 Lynn St, Thibodaux, LA 70301.

Non-Discrimination

By submitting and signing this bid, bidder agrees to abide by the requirements of the following as applicable: Title VI and VII of the Civil Rights Act of 1964, as amended by the Equal Opportunity Act of 1972, Federal Executive Order 11246, Federal Rehabilitation Act of 1973, as amended, The Veteran's Readjustment Assistance Act of 1974, Title IX of the Education Amendments of 1972, the Age Act of 1975, and bidder agrees to abide by the requirements of the Americans with Disabilities Act of 1990. Bidder agrees not to discriminate in its employment practices, and will render services under any contract entered into as a result of this solicitation without regard to race, color, religion, national origin, veteran status, political affiliation, or disabilities. Any act of discrimination committed by bidder, or failure to comply with these statutory obligations when applicable, shall be grounds for termination of any contract entered into as a result of this solicitation.

Any person requiring special accommodations must notify the Lafourche Parish Sheriff's Office Purchasing Department, in writing, not later than seven (7) days prior to the bid opening date of their special accommodations.

Award of Contract

The Lafourche Parish Sheriff's Office reserves the right to award items separately, grouped or on an all-or-none basis. Every contract shall be awarded to "Lowest Responsible and Responsive Bidder", taking into consideration the conformity with the bid proposal specifications and requirements that were advertised.

Vendor Access

Before an award can be made to you, you will need to register as a vendor with Lafourche Parish Sheriff's Office through Vendor Access. If you are contacted to register, you will have five (5) days to register and supply all documentation requested.

<https://lafourcheparishshfdeptla.tylerportico.com/va/vendor-access/registration>

LAFOURCHE PARISH SHERIFF'S OFFICE RESERVES THE RIGHT TO PURCHASE ANY ITEM FROM STATE CONTRACT.

Upon acceptance of your bid, the Lafourche Parish Sheriff's Office will issue a Contract to the successful bidder. No materials or supplies should be shipped or considered purchased under this bid until receipt of a Purchase Order.



Right to Reject

The Lafourche Parish Sheriff's Office reserves the right to reject any and all bids in whole or in part and to waive any and all formalities in the best interest of the Lafourche Parish Sheriff's Office. Lafourche Parish Sheriff's Office has the right to prohibit awards of procurement with individuals convicted of certain felony crimes.

LA R.S. 38:2212.3 authorizes the Lafourche Parish Sheriff's Office to reject the lowest bid if received from a bidder domiciled in a Communist country, or if the materials or supplies are manufactured in a Communist country, including but not limited to the Soviet Union, China, North Korea and Vietnam, and to award the contract to the next lowest bidder, provided this Section shall not apply to any country having established trade relations agreements or approvals from the government of the United States.

Cancellation of Contract

Lafourche Parish Sheriff's office has the right to terminate the contract immediately for any of the following reasons: (A) Misrepresentation by the contractor, (B) Contractor's fraud, collusion, conspiracy or other unlawful means of obtaining any contract with the Lafourche Parish Sheriff's Office; (C) Conflict of contract provisions with constitutional or statutory provisions of State or Federal Law; (D) Abusive or belligerent conduct by contractor towards an employee or agent of the Sheriff's Office; (E) Contractor's intentional violation of the public bid law and its corresponding regulations, or (F) any reason for debarment.

Lafourche Parish Sheriff's Office or the contractor may terminate the contract for convenience at any time by giving (1) thirty (30) days written notice to the other; or (2) by negotiating with the contractor an effective date. The Sheriff's office will pay contractor for, if applicable, transaction-based services up to the date of termination to the extent the work has been performed satisfactorily.

Lafourche Parish Sheriff's Office has the right to terminate the contract for cause by giving thirty (30) days written notice to the contractor of such termination for any of the following non-exclusive reasons: (A) Failure of the service to meet specifications or (B) any other breach of contract.

Governing Law, Venue

All Bid disputes will be governed in accordance with the laws of the State of Louisiana. All issues shall be resolved in the 17th Judicial District Court, Lafourche Parish, Louisiana.

Indemnity

Contractor agrees, upon receipt of written notice of a claim or action, to defend the claim or action, or take other appropriate measure, to indemnify, and hold harmless, the Sheriff's Office, its officers, its agents or its employees from and against all claims and actions for bodily injury, death, or property damages caused by the fault of the contractor, its officers, its agents, or its employees.

Contractor is obligated to indemnify only to the extent of the fault of the contractor, its officers, its agents, or its employees. However, the contractor shall have no obligation as set forth above with respect to any claim or action from bodily injury, death or property damages arising out of the fault of the Sheriff's Office, its officers, its agents or its employees.

Anti-Lobbying and Debarment Act

The contractor will be expected to comply with federal statutes in the anti-lobbying act and the debarment act.



Certification of no federal suspension or debarment.

By signing and submitting any bid for \$25,000 or more, the bidder certifies that their company, any Subcontractors, or principals are not suspended or debarred by the general services administration (GSA) in accordance with the requirements in "audit requirements in Subpart F of the Office of Management and Budget's uniform administrative requirements, cost principles, and audit requirements for federal awards" (formerly OMB Circular A-133).

A list of parties who have been suspended or debarred can be viewed via the internet at <https://www.sam.gov>.

In accordance with Louisiana Law, all corporations (see LA R.S. 12:262.1) and Limited Liability Companies (see LA R.S. 12:1308.2) must be registered and in good standing with the Louisiana Secretary of State in order to hold a Purchase order and/or contract over \$25,000.

All bid amounts shall be submitted in United States Dollars.

Estimated Quantity: The listed quantities are estimated to be the amount needed. In the event a greater or lesser quantity is needed, the right is reserved by Lafourche Parish Sheriff's Office to increase or decrease the amount at the unit price and terms stated in the bid.

Freight Charges: Unit price shall be inclusive of any freight charges. Bid shall be F.O.B. Destination agency – title passing upon receipt of goods. Failure to comply with this requirement may disqualify your bid.

Payment

Payment will be made on the basis of unit price as listed in the bid; such price and payment will constitute full compensation for furnishing and delivering the service. Payment terms are Net 30 days after receipt of order.

Payment will not be made in advance. Invoices should be sent to accounts-payable-dept@lpsa.net.

Contractual Period

The Lafourche Parish Sheriff's Office intends to award this contract for an initial period of twenty-four (24) months.

Renewals:

At the option of Lafourche Parish Sheriff's Office and acceptance by the contractor, this contract may be extended for two (2) additional twelve (12) month periods at the same prices, terms and conditions. Total contract time may not exceed forty-eight (48) months.



Instructions to Vendors

Note: This form is to be signed and returned with the bid.

Vendors are required to use the current product spreadsheet included within the packet.

Important:

- All fields on quote spreadsheet are to be completed. Vendor is not required to quote on every item. Please respond "no quote" on the items you do not wish to quote.
- Brand and model number of product must be provided. If brand and model number is not provided, it shall be understood that the price submitted adheres to specifications of requested item.
- Prices must include all shipping/fuel charges.
- Products will be ordered on an "as-needed" basis and quantities may vary.
- Minimum order requirements will NOT be accepted.
- Awarded product not delivered on time and up to Lafourche Parish Sheriff's Office standards will be forfeited and award given to the next lowest proposer.
- Only one quote per line item shall be accepted. Multiple quotes per line item shall result in rejection of that item.
- Quotes must be signed by an individual with signature authority and is authorized to bind the vendor.
- Proposer confirms that its quote will be considered valid until award is made.

Vendors electing to claim Louisiana preference, as defined by La RS 38:2251, et. seq., must complete the attached **Louisiana Preference Claim Form** and present it as part of the quote.

By signing and submitting bid, vendor certifies that this is the lowest bid prices for quality products or at prices no greater than the wholesale rate of the same item. Vendor cannot raise prices after bid has been awarded. If vendor does so, it will result in loss of entire bid awarded.

By signing below, I am verifying that I have read and understand the above instructions.

Signature

Date



Signature Form

*In compliance with the Request for Quotes and subject to conditions thereof, the undersigned offers and agrees that the bid be accepted and to furnish any and all items at the prices set opposite each item. **Bidder agrees that offer is valid for sixty (60) days.***

Please **PRINT** the below information –

Legal Company Name: _____

Individual with Signature Authority: _____

Written Authority to Sign Bid:

Signature on the bid is that of any corporate officer listed on the most current annual report on file with the Secretary of State, or the signature on the bid is that of any member of a partnership, limited liability company, limited liability partnership, or other legal entity listed in the most current business records on file with the Secretary of State.

Signature on the bid is that of an authorized representative as documented by the legal entity certifying the authority of the person.

The legal entity has filed in the appropriate records of the Secretary of State of this state, an affidavit, resolution, or other acknowledged or authentic document indicating the names of all parties authorized to submit bids for public contracts. Such document on file with the Secretary of State shall remain in effect and shall be binding upon the principal until specifically rescinded and canceled from the records of the office.

Signature: _____
(Individual with Signature Authority)

Date: _____

Printed Name of Individual: _____

Title: _____

Mailing Address: _____

Email Address: _____

Phone Number: _____



Louisiana Preference Claim Form

Louisiana Revised Statue 38:2251, et seq., details the conditions and requirements by which the preference claims may be made for certain materials, supplies and provisions, produced, manufactured, grown or assembled in Louisiana.

Specify percent of preference claimed (**7% OR 10%**), name of the Louisiana product offered, name of the producer or supplier to you, and the location within Louisiana where the product(s) is/are grown, produced, harvest, processed and/or manufactured as appropriate to the item.

% of Preference Claimed	Name of Louisiana Product	Name of Producer /Supplier	Louisiana Location

I certify that the above information is true and accurate and that the above products meet the criteria of Louisiana products.

Signature:_____

To qualify for a preference, the proposer must supply all the above information & sign form.



BID CHECKLIST

Check off each line. Items in **bold** are required to be returned as part of your Bid submission.

*** AT A MINIMUM, THE BELOW FOUR (4) ITEMS MUST BE RETURNED WITH THE BID OR YOUR BID WILL BE DISQUALIFIED.***

* ☐ Completed Pricing Sheet in Excel format

* ☐ Signed Instructions to Vendors form.

* ☐ Signed Bid "Signature Form" and proof of signature authority.

* ☐ *Signed Price Adjustment Form.*

☐ Vendor may include a copy of "Certificate of Insurance" naming Lafourche Parish Sheriff's Office as an additional insured and the certificate holder.

☐ Vendor has read the "General Terms and Conditions".

☐ The Louisiana Preference Form is completed and **attached, if applicable.**

UNIFORM SPECIFICATIONS

**LONG SLEEVE COTTON ALTERNATE DEPUTY/CIVIL DEPUTY SHIRTS-MEN/WOMEN
5.11 46122 or Equivalent**

**SHORT SLEEVE COTTON ALTERNATE DEPUTY/CIVIL DEPUTY SHIRTS-MEN/WOMEN
5.11 46123 or Equivalent**

SHELL FABRIC

1. 100% cotton 5.6 oz. twill, machine washable and dry cleanable.

TRIM

2. 100% cotton twill weave for comfort
3. Full zipper closure in front with working top and bottom buttons.
4. Collar stays are along the front edge of collar for professional appearance
5. 5 military style creases stitched in front and back
6. 2 mitered pleated pockets with scalloped flaps, pencil opening in left pocket, hook and loop closure. Remove sewn on button and replace with button opening for gold metal buttons. Gold metal buttons on epaulets and front pocket flaps.
7. Badge eyelets with internal support strap, bottom buttonhole placed 1.75" above top of pocket flap to accommodate the award bar.
8. Pocket flaps to be MERROWED with True Navy .40 weight MERROW floss
9. Extra-long shirt tails.
10. Seams are durable with 10-12 stitches per inch on all operations
11. 2 vertical BARTACKS on each of the pocket flaps, spaced 1.5" apart for the pen pocket Opening
12. BARTACKS at top corners of pocket flaps and chest pockets
13. 20 LIGNE buttons
14. Long sleeves have 2 buttons on each cuff, 1 on each sleeve placket, and 1 spare button
15. Epaulets tacked at corners of points for security to allow for placement of black shoulder boards.

COLORS: White or Medium Blue

STANDARD SIZE RANGE

16. Men's: XS – 3XL, regular and tall lengths.
17. Women's: XS – 3XL, regular length

UNIFORM SPECIFICATIONS

COTTON ALTERNATE DEPUTY/CIVIL DEPUTY 4 PKT. TROUSERS-MEN/WOMEN

SHELL FABRIC

1. 8-12 oz. 100% Cotton with exclusive “Low Fade” dye technology for superior colorfastness to washing. Machine washable and dry cleanable. **Color: Dark Navy**

TRIM

2. Pocketing: self fabric
3. Interlining: 100% polyester
4. Binding: self fabric bias cut
5. Waistband: self fabric ¾” cotton full tape with sewn-in silicone shirt grip
6. Waistband Elastic: 2” Polyester dry cleanable elastic.
7. Fly zipper: brass zipper with nomex, size #5, auto-lock slider
8. Snap: 24-ligne prim spring snap.
9. Buttons: melamine, 22 lignin, matching shell fabric
10. Thread: 100% cotton

DESIGN AND CONSTRUCTION

11. 2 Front quarter pockets, 2 rear hip pockets.
12. All pocket secured with bar tacks.
13. Partial elasticized fold over waistband with silicone beaded twill tape stitched inside.
14. *Piggyback stripe down seam of legs beginning at base of pocket. Striping: The striping is 1/2" Mariners Navy polyester on 3/4" Yellow Gold polyester.*
15. Interlined wide belt loops inserted in bottom of waistband and tacked at top.
16. Double hook and eye closure.
17. Outlet in waistband (back).
18. Tandem needle seat seam.
19. 10-12 stitches per inch (all seams).

STANDARD SIZE RANGE

20. Men's: Regular Length: even waist sizes 28 - 54; odd sizes 31 – 37
21. Women's: Regular Length: even dress sizes 6 – 22

SHELL FABRIC

1. RIPSTOP- 3 L-Stretchable RIPSTOP. (Color: see specified garment color).
2. Dobby- 2L- Dobby 350mm w/light coating. (Color: see specified garment color).

TRIM

3. Eyelets: 8mm aluminum. (Color: black)
4. Hook and loop: woven nylon base. (Color: black)
5. Reflective trim: 1 inch wide, silver crosswalk.
6. Seam tape: waterproof seam-sealing tape (Color: grey).
7. Snaps: 20 LIGNE prong style with closed backs, gunmetal finish on brass, heavy-duty closure, 24 LIGNE nylon cap.
8. Brushed Pocketing: 100% Polyester brushed tricot. (Color: black)
9. Zippers:
 - a. Front: VISLON, one way, double pull, size #5, 27 1/2 inches. (Size L/Regular, black)
 - b. Side seam: coil, one way, size #5, 11.5 inches. (Size L/Regular, black)
 - c. Liner zipper: VISLON, size #5, one way double pull, 25 1/2 inches (Size L/Regular, black)
 - d. Sleeve zipper: coil, one way, size #5, 10 inches (Size L/Regular, black)
 - e. Napoleon Pocket zipper: coil, one way, size # 3, 7 inches (Size L/Regular, black)
 - f. Collar zipper: coil, one way, size # 3, 9 1/2 inches (Size L/Regular, black)
10. Embroidered badge: DIMENSION: H: 2 1/4" W: 2"

ALL COLORS ARE MADEIRA 40 POLYNEON

1: 1895

2: 1801

3: 1624

4: 1758

5: 1800

6: 1801

7: 1742

8: 1742

9: 1624

10: 1742

Total stitch count: 19,847

11. Emblem: 4.5" Tall, 4" Wide, 100% Embroidery

DESIGN AND CONSTRUCTION

12. B.DRY waterproof, windproof, breathable waist length jacket.
13. Optional zip-out liner.
14. Double entry lower pockets with flaps.
15. Double storm flaps cover VISLON zipper.
16. Hidden napoleon mesh pocket.
17. Crosswalk reflective trim inside cuffs and on collar.
18. Sleeve zippers for added ventilation.
19. Side zippers with snap tabs for access to equipment.
20. Three-piece sleeve with sleeve tab adjustment.
21. Front and back yoke flaps with pull down panels.
22. Epaulets and badge tab.
23. MIC tab on front STORMFLY.
24. Detachable hood in collar with zipper.
25. (2) LPSO arm emblems.
26. 3M Silver Reflective "SHERIFF" on the back pull down panel.
27. LPSO embroidered badge logo on the front left pull down panel.

SIZE RANGE

28. Unisex:
- | | |
|----------|----------|
| Regular: | XS - 4XL |
| Long: | M - 4XL |

MEASUREMENTS

29. Unisex regular length: Size: Large
- a. Chest: 53.5 (plus or minus 0.75 inches)
 - b. Sweep: 50.5 (plus or minus 0.75 inches)
 - c. Back Length: 27.25 (plus or minus 0.75 inches)
 - d. Sleeve Length from CB: 36 (plus or minus 0.5 inches)

PUBLIC SAFETY GORE-TEX JACKET & LINER – UNISEX
Flying Cross by Fechheimer Item: F1 ~~79900GTXA or Equivalent~~

STYLE

~~Waist length style with 6 snap storm flap overlapping a 2 way zipper. Side vents for access to equipment.
Front and back flapped yokes to accommodate drop down panels.
Utility shoulder straps. Hide away hood. Shoulder epaulettes to
accommodate rank insignia.~~

OUTER SHELL

~~100% Nylon, 3 ply Supplex, 3.7 oz per sq. yd., with water and
stain repellency, uncoated.~~

COLOR

~~Navy~~

DROP LINING

~~Made from waterproof, breathable, windproof 2 layer Gore-Tex®.
Face fabric: 100% Black Polyester.
Membrane layer: bi-component PTFE membrane.
Drop lining shall have following minimum physical properties:~~



CHARACTERISTIC	REQUIREMENT	TEST METHOD
Moisture Vapor Transmission Rate (g/m²/24hr)		
Procedure B	600 Minimum	ASTM E 96-93 <u>1</u> /
Procedure BW	6,000 Minimum	ASTM E 96-93 <u>2</u> /
Hydrostatic Resistance (psi)	110 Minimum	FED-STD-191A-5512 <u>3</u> /
Low Pressure Water Permeability:		
Initial	No Leakage	FED-STD-191A-5516 <u>4</u> /

After Cold Flex- Warp Fill	No Leakage No Leakage	ASTM D 2097-69 (1980) <u>5</u> /
After 10 Hours of laundry- cycles	No Leakage	FED-STD-191A 5516 <u>6</u> /
After Dry Cleaning	No Leakage	FED-STD-191A 5516 <u>7</u> /
High Pressure Water- Permeability:		
Initial	No Leakage	BS3424:Part 26: 1990 Method 29A <u>8</u> /
After exposure to Unleaded Gasoline, Deet insect repellent, Hoppps #9 Gun Cleaner, Motor Oil SAE 15W-40	No Leakage	BS 3424:Part 26:1990 Method 29A <u>9</u> /

TEST METHODS

1. The film side of the laminated cloth shall face the water. The free stream air velocity shall be 550 ± 50 fpm as measured at least 2 inches from any surface. The test shall be for 24 hours and weight measurements shall be taken only at the start and completion of the test. At the start of the 24 hour test period, the air gap between the water surface and the back of the specimen shall be $3/4 \pm 1/16$ inch. Five specimens shall be tested. The test chamber shall be $73.4 \pm 1^\circ\text{F}$ and relative humidity shall be $50 \pm 2\%$. The face of the rim of the test dish shall project $1/32$ " into the tunnel.
2. The film side of the laminated cloth shall face the water. The free stream air velocity shall be 550 ± 50 fpm as measured at least 2 inches from any surface. The test shall be for 2 hours and weight measurements shall be taken only at the start and completion of the test. Five specimens shall be tested. Specimens shall be sealed in any manner which prevents wicking and/or leakage of water out of the cup. The test chamber shall be $73.4 \pm 1^\circ\text{F}$ and relative humidity shall be $50 \pm 2\%$. The face of the rim of the test dish shall project $1/32$ " into the tunnel.
3. The water pressure shall be applied to the film side of the laminated cloth.
4. The film side of the laminated cloth shall contact the water. The hydrostatic head shall be 30 inches (1.1 psi) and shall be held for 3 minutes. Leakage is defined as the appearance of water any place within the 4.5 inch diameter test area. The test may be performed using any device which tests the same specimen area at the equivalent pressure. In case of dispute, the apparatus described in FED-STD-191A Method 5516 shall be used.
5. Ten warp and ten fill specimens $3.25" \times 4.5"$ shall be selected from each sample unit. The $3.25"$ dimension is the test direction. Specimens shall be flexed for 20,000 cycles as

specified in ASTM-D 2907 and as follows. Mark the film side of each specimen with two lines 1.7 inches apart and perpendicular to the test direction. The area between the lines is the test area and shall be centered on the film side of the specimen. Wrap the specimens around fully extended pistons with the film side out. The test area lines shall meet evenly and shall line up with the edges of the pistons.

Clamp in place making sure the clamps are not in the test area. Check specimen for smoothness and tautness (wrinkles cause improper flexing). The distance between the pistons shall be 1.7" in the open position and 0.5" in the closed position as measured from the bottom of the upper piston and top of the lower piston. Place the test apparatus with mounted specimens in a test chamber at $-25 \pm 2^{\circ}\text{F}$ for a one hour conditioning period and then flex in the test chamber at $-25 \pm 2^{\circ}\text{F}$. After flexing, test for water permeability as in footnote 4/ except that the orifice of the tester shall be modified to accommodate the smaller specimen size as shown in Attachment 1.

6. One 1 yard by full width specimen shall be selected from each sample unit. The specimens shall be tested after ten (10) home laundry cycles. Laundry testing should be performed in accordance with the procedure specified in Machine Cycle 3, Wash Temperature III, and Drying Procedure Aiii of AATCC 135. The specimen shall be tested for water permeability at three sites across the width of the specimen according to footnote 4/.
7. One 1 yard by full width specimen shall be selected from each sample unit. The specimens shall be professionally dry-cleaned ten (10) times with a pure distilled solvent rinse. The specimens shall be tested for water permeability at three sites across the width of the specimen according to footnote 4/.
8. The water pressure shall be applied to the film side of the laminated cloth from below the test specimen. The maximum pressure of 25 psi shall be attained in 2 minutes $\pm$ 20 seconds and shall be applied for 5 minutes. Leakage is defined as the appearance of water any place within the test area.
9. Place a 6" x 6" piece of blotting paper on a flat surface and cover with a 10" x 10" test specimen with the film side up. Weigh out 2.0 ± 0.1 grams of solid contaminant or pipette 2.0 ml of liquid contaminant. Place the contaminant on the center of the specimen and cover with a 6" x 6" piece of glassine paper. Place a 4 pound weight on the glassine paper directly over the contaminated area. Allow the weight to remain on the specimen for 30 minutes. Remove the weight and glassine paper and allow the specimen to sit undisturbed for an additional 30 minutes. Wipe off any excess contaminant using a fresh piece of blotting paper and test for water permeability as in footnote 8/ except that the water pressure shall be applied for 3 minutes.
10. One specimen per sample unit shall be tested for water permeability after exposure to synthetic perspiration. The specimen shall be not less than six inches in diameter. The test cups shall accommodate this size specimen and shall have a depth of at least one inch. The cups shall be sealed to prevent leakage. The solution shall contact the fabric side of the laminate.

Synthetic perspiration shall be prepared by stirring the following ingredients into 500 ml of distilled water:

- 3 grams sodium chloride
- 1 gram predigested protein
- 1 gram n-propyl propionate
- 0.5 gram lecithin (phosphatidyl choline)

The predigested protein shall contain the following amino acids:

<u>Ingredient</u>	<u>Milligrams (mg)</u>
Lysine	82.5
Histidine	27.5
Arginine	40.0
Aspartic acid	72.5
Threonine	42.5
Serine	50.0
Glutamic acid	197.5
Proline	92.5
Glycine	22.5
Alanine	28.7
Cystine	4.7
Valine	66.2
Methionine	30.0
Isoleucine	53.8
Leucine	87.5
Tyrosine	51.3
Phenylalanine	48.8
Tryptophane	18.8

The solution shall be stirred continuously and heated to $50 \pm 1^{\circ}\text{C}$, then covered and cooled to approximately 35°C .

The solution shall be stirred such that any solid particles are suspended in solution and poured into the test cup. The cup shall be inverted to allow the synthetic perspiration to evaporate through the specimen.

After the solution has evaporated through the specimen, such that no more than 0.125-inch of solution remains, the specimen shall be removed from the cup, rinsed in warm water, dried and tested for water permeability as specified in footnote 8/ except that the water pressure shall be applied for 3 minutes.

11. A minimum of 3 straight seams and 2 cross-over seams should be tested prior to laundry cycle testing and remain waterproof (no leakage) when tested at 2 psi for 3 minutes with the seam tape side facing up, away from the water challenge. Leakage is defined as the appearance of water any place within the 4.5 inch diameter test area since the seam tape process can damage the fabric adjacent to the tape. The test may be performed using any device which tests the same specimen area at the equivalent pressure. In case of dispute, the apparatus described in FED-STD-191A Method 5516 shall be used.
12. A minimum of 3 straight seams and 2 cross-over seams should be tested after ten (10) home laundry cycles and remain waterproof (no leakage) when tested at 2 psi for 3 minutes with the seam tape side facing up, away from the water challenge. Leakage is defined as the appearance of water any place within the 4.5 inch diameter test area since the seam tape process can damage the fabric adjacent to the tape. The test may be performed using any device which tests the same specimen area at the equivalent pressure. In case of dispute, the apparatus described in FED-STD-191A Method 5516 shall be used. Laundry testing should be performed in accordance with the procedure specified in Machine Cycle 3, Wash Temperature III, and Drying Procedure Aiii of ANSI/AATCC 135.
13. A minimum of 3 straight seams and 2 cross-over seams should be tested after ten (10) dry clean cycles and remain waterproof (no leakage) when tested at 2 psi for 3 minutes with the seam tape side facing up, away from the water challenge. Leakage is defined as the appearance of water any place within the 4.5 inch diameter test area since the seam tape process can damage the fabric adjacent to the tape. The test may be performed using any

~~device which tests the same specimen area at the equivalent pressure. In case of dispute, the apparatus described in FED-STD-191A Method 5516 shall be used.~~

MEASURED PROPERTY ACCEPTANCE CRITERIA

~~For moisture vapor transmission rate and hydrostatic resistance, the mean of each sample unit must meet the requirement specified. The mean is the average of five cross-web specimens. For water permeability testing, each individual specimen must meet the requirement specified.~~

SEAM SEALING

~~All seams shall be sealed with Gore-Tex® seam sealing tape to prevent leakage. All stitching through the liner shall be sealed with waterproof tape.~~

OUTER SHELL

FACING

~~There shall be an inside facing of shell material with a non-woven interlining approximately 1" wide on each side. There shall be a #5 YKK Delrin 18" zipper set between the facing and the lining to attach the removable liner.~~

FRONT

~~There shall be a double storm flap over the front zipper to ensure a waterproof front extending into the collar. The storm flap shall be lined with waterproof membrane. The storm flap shall close with six 24-ligne snaps that are not exposed to the outer portion of the storm flap. The front zipper shall be a #5 two-way YKK zipper. There shall be a yoke on each side of the front facing with nylon mesh for ventilation as well as to conceal drop-down reflective panels. A zipper shall be sewn into the yoke to accommodate drop-down panels.~~

BADGE TAB

~~Made from shell fabric, permanently affixed on left chest. Metal eyelets are spaced 1 1/4" center to center.~~

COLLAR

~~There shall be a two-ply collar of self-material interlining sewn to the top of collar for stability. A 7" nylon zipper shall be inserted under the collar and centered to accommodate a drop in hood. There shall be a hanger loop of self-material centered at the inside of the neckline. A snap shall be placed on the label carrier to secure the removable insulated liner.~~

SLEEVES

~~There shall be a two-piece sleeve with an articulated armhole to allow freedom of movement. Each sleeve shall have a nylon zipper positioned on the underside of the sleeve seam approximately 10" from underarm seam to allow application of patch without puncturing the membrane. Patches shall be affixed to each sleeve.~~

CUFF

~~An adjustable, elasticized, cuff with a hook and loop tab shall be set on each. This cuff shall be made from outer shell material.~~

SHOULDER UTILITY STRAP

~~The utility strap shall be centered on each shoulder, 2 1/4" wide, stitched into the armhole seam and neck seam. The 1 3/4" long center shall not be stitched down to the body of the coat to allow attachment of a radio microphone.~~

POCKETS

~~There shall be 2 inside pockets made of self-material with zipper closure, right and left side. There shall be two, 2-way hand-warmer pockets with inverted pleats, measuring approximately 7 1/4" long X 6 1/2" wide with a mitered flap closure with snaps. The hand-warmer pocket shall be lined with kasha lining and the other pockets shall be lined with interlining material. There shall be an 8" vertical pocket set between the storm flap and the hand-warmer pocket.~~

WAISTBAND

~~There shall be a two-piece waistband made of outer-shell material with elastic. There shall be a 10" zipper closure on each side of the jacket to accommodate equipment with elastic tabs and snap closure.~~

BACK

~~The back shall have a rain-shed yoke lined with waterproof, breathable membrane and faced with a nylon-mesh. The yoke shall have a permanent zipper inserted to accommodate drop-down panels.~~

HOOD

~~There shall be a 3-piece hood lined with waterproof membrane. The hood shall drop into the collar opening and concealed with a zipper closure.~~

REMOVABLE INSULATED LINER

SHELL

~~86 pick black nylon taffeta.~~

INSULATION

~~3M Thinsulate insulation. Lining must be quilted horizontally with a minimum of a 6" railroad pattern for maximum thermo retention. Excess stitching and openings in liner cause extreme loss of body heat.~~

BODY

~~Insulated with 3M Thinsulate. 200-gm composed of 100% Polyester.~~

SLEEVES

~~Insulated with 3M Thinsulate, 100-gm composed of 100% Polyester. The liner sleeves shall have knit-wristlets.~~

FINISHING & PRESSING

~~The entire jacket must be made in a first-class manner—work clothes type jackets will not be acceptable. All loose threads must be removed.~~

SIZE TAG, CARE INSTRUCTIONS AND CONTENT LABELS

~~The jacket shall have a sewn-in label giving care instructions and a permanent woven size tag. The jacket shall also have a label indicating lot number, size, fiber content, and RN number.~~

STOCK SIZES

~~SHORT: XSMALL—LARGE~~

~~REGULAR: XSMALL—5XL~~

~~LONG: MEDIUM—5XL~~

UNIFORM SPECIFICATIONS – BDU's

TACLITE PRO SHIRTS -unisex

5.11 71175 SHORT SLEEVE

5.11 72175 LONG SLEEVE

SHELL FABRIC

1. Ultra-lightweight 4-0z, 65% polyester/35% cotton RIPSTOP
2. **Color: Dark Navy**

TRIM

3. Comfortable, durable and functional
4. Teflon® treated for stain and soil resistance
5. 2 patented Hidden document pockets located on the front chest designed with Velcro closures.
6. Overlaying hidden document pockets are large pleated patch pockets finished with Velcro.
7. Left pocket incorporates pass-through slot for pens.
8. 2 narrow pen pockets are on the left sleeve.
9. Hidden button-down collar stays
10. Large cape-back with a tacked center point to vent and evaporate moisture.
11. Two (2) LPSO arm emblems applied
 1. LPSO badge logo embroidered onto left chest, 2 ¼" H x 2" W
 2. 1/2" dark navy nametape embroidered on a Velcro strip with yellow gold name (Full Name)
 - a. Velcro strip stitched directly above the right pocket (width to be exactly the same as pocket).
 - b. (NAME TAG CAN BE REMOVED)
 3. L.P. embroidered 3/8" in Gold on left collar point; S.O. embroidered 3/8" in Gold on right collar point.
 4. Epaulettes to accommodate black shoulder boards.

STANDARD SIZE RANGE

12. Regular S – 4XL
13. Tall L – 5XL

UNIFORM SPECIFICATIONS – BDU's

TACLITE PRO PANTS- unisex

5.11 74273 or Equivalent

SHELL FABRIC

1. Lightweight 65% polyester and 35% poly cotton RIPSTOP
2. **Color: Dark Navy**

POCKETING

3. Magazine/cell phone picket located over the left cargo pocket reinforced with 100% CORDURA nylon.
4. Two cargo pockets located on both thighs
5. Signature rear strap and slash pocket design
6. Teflon® fabric protector to repel water and stains
7. External knife pocket
8. Rear web strap
9. YKK® zippers
10. PRYM® snaps
11. Clip loop

STANDARD SIZE RANGE

12. Waist: 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54
Length: un-hemmed.

UNIFORM SPECIFICATIONS

SHORT SLEEVE UNIFORM POLO SHIRT
BICYCLE/WATER PATROL, RSO

SHELL FABRIC

1. 10.5 oz. per linear yard 35% B.COOL Polyester / 65% Cotton double pique knit with 70 denier textured polyester face and 30/1 cotton back.
2. Color: Medium Blue- Bike/Water Red-Fire Arms Instructor/RSO

TRIM

3. Interlining: 100% polyester weft fusible
4. Buttons: 20 LIGNE melamine (Color: match shell fabric)
5. Velcro Pocket Corners

DESIGN AND CONSTRUCTION

6. Short-sleeve uniform shirt
7. 5-crease military style with 3-button placket
8. Sport collar
9. Pleated patch pockets with pocket flaps
10. Epaulets
11. Extra-long shirt tails
12. LPSO badge embroidered on left chest, 2 ¼" H x 2" W
13. Velcro strip stitched directly above right pocket, color to match medium blue shirt, with ½" Nametape embroidered in yellow Gold (Full Name) on a matching velcro strip so that the name tag can be removed.
14. LP embroidered 3/8" high in gold on left collar point, SO embroidered 3/8" high in gold on right collar point
15. Emblem patches applied to each arm.

STANDARD SIZE RANGE

16. Sizes:
Unisex XS - 3XL

MEASUREMENTS

17. Unisex regular length: Size L

- a. 1/2 Chest: 24.75 (plus or minus 0.75 inches)
- b. Back Length: 32 (plus or minus 0.5 inches)
- c. Sleeve inseam: 7 (plus or minus 0.5 inches)

UNIFORM SPECIFICATIONS

BICYCLE PATROL/BDU SHORTS
MOCEAN APPROACH or Equivalent

SHELL FABRIC

1. **SUPPLEX** nylon w/Teflon HT shell in front with X-Factor inlay in the seat
2. Color: Dark Navy

TRIM

3. Double needle top stitching with BARTACKS on all stress points
4. ½ silver reflective piping applied from bottom of waistband down

DESIGN AND CONSTRUCTION

5. Can be worn loose or snug fitting with 7.5" inseam
6. Varied fit waist half fitted/half elastic waist with a zipper fly, snap closure and Floating Belt loops
7. Gusseted crotch for ease of motion
8. X-Factor is used in the seat area for superior protection getting on and off the bikes
9. 2 J-slashed reservoir pockets that allow easy access while wearing a duty belt
10. 1 pen pocket with 2 pen ports
11. 2 back pockets with zipper closure and flaps

SIZE RANGE

12. Sizes: XS – 5XL

UNIFORM SPECIFICATIONS

MOTORCYCLE JACKET

TAYLOR'S LEATHERWEAR MODEL G4473-Z or Equivalent

SHELL FABRIC

1. Cowhide, 25" length

DESIGN AND CONSTRUCTION

2. Zip out THINSULATE liner
3. 1 inside pocket
4. Zippered sleeves and pockets
5. Large kidney pad
6. 4 equipment loops
7. Bi-swing back
8. Side zippers added on either side to allow for weapon access
9. 2 LPSO arm emblems applied, 1 to each sleeve
10. Sizes Small – 3XL



COMMAND SINGLE BREASTED DRESS COAT

SHELL FABRIC

1. 100% visa System 3 Polyester technology for a soft feel, excellent stain release and advance moisture management
2. 11 – 11.5 oz. serge weave

DESIGN AND CONSTRUCTION

3. Fully lined single-breasted jacket with 4-button front and notched lapels
4. Excellent form-flattering fit with shoulder pads and coat front enhancements
5. 2 Box-pleated breast pockets with scalloped flaps
6. 2 Lower simulated pockets with scalloped flaps
7. Back center vent design
8. Finely crafted details include cross-stitched shoulder straps, inside breast pocket and lined inside sweat shields

STANDARD SIZE RANGE

9. Chest Size 32 – 44 (even measurements) Regular and Long Lengths
10. Chest Size 46 and up (even measurements) Regular and Long Lengths



ADMINISTRATIVE CARDIGAN SWEATER

Cobmex 4018 or Equivalent

SHELL FABRIC

- 11. 52%Cotton/31%Acrylic/ 17%Nylon
- 12. Soft and durable
- 13. Color: Dark Navy

TRIM

- 14. Matching buttons on placket
- 15. LPSO emblem patches on each arm

DESIGN AND CONSTRUCTION

- 16. Stretch yarn offers a flattering fit
- 17. Coldwater wash

STANDARD SIZE RANGE

- 18. Sizes: XS - 3XL
- 19. Size chart: XS S M L XL 2XL 3XL
- 20. Center Back Length 22 23 24 24 25 25 26
- 21. Chest 18 19 20 21 22 24 25
- 22. Sleeve Length (Cap) 22 23 23 23 23 23 23

SHELL FABRIC

1. 3.7 oz. per square yard, 100% Polyester heavy denier breathable tricot with soil release treatment and firm hand. (Color: see specified garment color)

TRIM

2. Binding: 100% nylon plain weave taffeta (Color: black)
3. 100% polyester plain weave taffeta (Color: fluorescent yellow)
4. Hook and loop: woven nylon base. (Color: fluorescent yellow)
5. Eyelets: aluminum, black enamel finish
6. Ribbon: 2.25-inches grosgrain, heavy weight. (Color: black)
7. Reflective trim: 2.0 inch wide, 3M SCOTCHLITE™ silver reflective fabric on heavy weight Grosgrain ribbon

DESIGN AND CONSTRUCTION

8. Full cut vest sized to fit male and female officers.
9. Front and rear panels connected at the shoulders and sides.
10. High contrast SCOTCHLITE™ striping.
11. Microphone tabs on each shoulder.
12. Fully adjustable waist.
13. "Break away" shoulder and side access to equipment.
14. 'Sheriff' in black lettering front and back

STANDARD SIZE RANGE

15. Unisex sizing:
Regular: SM-M
L – XL
2XL – 3XL

MEASUREMENTS

16. Regular Length: Size: L-XL
 - a. Across Chest: 19.125
 - b. Center Front Length: 15
 - c. Across Back: 19.5
 - d. Center Back Length: 21.38

UNIFORM SPECIFICATIONS

TRAFFIC SAFETY GLOVES
Premier Item # DNR100 or Equivalent

COLOR

1. High Visibility yellow on black gloves (no red or orange)

FEATURES

2. Constructed of black Lycra® with patches of reflective microprism material with cube-corner prisms, three times more efficient at reflecting light than glass bead systems
3. Allows the wearer to be seen by motorists at the critical viewing distances of 100 to 600 feet
4. Stretchable Lycra® fabric allows DayNite™ gloves to be worn alone or over virtually any other gloves

SIZES

5. Small – X-large



UNIFORM SPECIFICATIONS

DEPUTY TIES – BREAK-AWAY

SAMUEL BROOME or Equivalent

FABRIC

1. 100% Polyester

COLOR

2. Midnight or navy blue to match uniform trousers

STYLE

3. Break-away. Attached together at back of neck with Velcro

FINISHING AND PRESSING

4. All loose threads shall be removed. Each tie shall be pressed and shaped properly.

ORIGIN

5. Made in the U.S.A.

SIZE

6. Regular and Long

UNIFORM SPECIFICATIONS

DEPUTY TIES – CLIP-ON

SAMUEL BROOME or Equivalent

FABRIC

1. 100% Polyester

COLOR

2. Midnight or navy blue to match uniform trousers

STYLE

3. Clip-on

FINISHING AND PRESSING

4. All loose threads shall be removed. Each tie shall be pressed and shaped properly.

ORIGIN

5. Made in the U.S.A.

SIZE

6. Regular and Long

DEPUTY TIES – WOMEN’S CROSSOVER

SAMUEL BROOME OR EQUIVALENT

FABRIC

1. 100% Polyester

COLOR

2. Midnight or navy blue to match uniform trousers

SIZE

3. 1 ½” Wide 22” length (adjustable length). Snap shall be centered below the collar, fabric to match tie.

ORIGIN

4. Made in the U.S.A

SIZE

5. Regular and Long

UNIFORM SPECIFICATIONS

BADGES AND METAL INSIGNIA (ALL EMPLOYEES)

METAL RANK INSIGNIA

SMITH & WARREN, BLACKINTON, or Equivalent

SERGEANT - #C542 9 (1" CHEVRONS, GOLD)

LIEUTENANT - #C538 (1" BARS, GOLD)

CAPTAIN - #C540 (1" BARS, GOLD)

MAJOR - #C522 (1" LEAF, GOLD)

SHERIFF - #C520S_4 (FOUR ½" GOLD CONNECTING STARS)

NAMETAGS:

SMITH & WARREN C558A , BLACKINTON or Equivalent

METAL FINISH: GOLD PLATE, HIGH POLISH

LETTERING COLOR: BLUE

LETTERING FONT: BLOCK

ATTACHMENT: DOUBLE CLUTCHBACK

SIZE: 2 ½" X ½"

MEDALS:

***ADD FULL COLOR LOUISIANA SEAL TO ALL MEDALS**

SMITH & WARREN, BLACKINTON or Equivalent

AWARD: MEDAL OF HONOR

MEDAL STYLE: MD110

DRAPE RIBBON: RC-32

AWARD: SHERIFF'S STAR

MEDAL STYLE: MD-C288-A

DRAPE RIBBON: RC-27

AWARD: MEDAL OF VALOR

MEDAL STYLE: MD-C288-B

DRAPE RIBBON: RC-38

AWARD: LIFESAVING

MEDAL STYLE: MD-C288-C

DRAPE RIBBON: RC-42

AWARD: PURPLE HEART

MEDAL STYLE: MD-C288-D

DRAPE RIBBON: RC-45

AWARD: DISTINGUISHED SERVICE

MEDAL STYLE: MD-C288-E

DRAPE RIBBON: RC-3

UNIFORM SPECIFICATIONS

COMMENDATION BARS: PRESENTLY USING BLACKINTON

***CLOTH WITH CLUTCH PINS, ENAMEL WITH CLUTCH PINS WITH GOL-TONE FINISH**

***NOTE: GOLD STARS WITH PRONGS TO BE AVAILABLE FOR PURCHASE**

RC-26		A4616-C		A3705		A10794-LS	
RC-19						A346-A	
RC-32						A346	
RC-27						A3704	
RC-38		A3704		A3705-A		A3704	
RC-42						A3704-A	
RC-45		A346		A7142-A		A3705	
RC-3		A346-A		A7142-B		A3705-A	
RC-22				A10794		A7142-A	
RC-30						A7142-B	
RC-33							

BREAST BADGE:

SMITH & WARREN, BLACKINTON or Equivalent

MODEL: SW-C288-LFDE*

FINISH: GOL-RAY

ENAMEL: ALL LETTERING AND POINTS OF STAR TO BE FILLED WITH DARK BLUE ENAMEL

CENTER SEAL: FULL COLOR SEAL-STATE OF LOUISIANA (LA2)

ATTACHMENT: HEAVY DUTY PIN & SAFETY CATCH

AVAILABLE FOR REFURBISHING

HAT/WALLET BADGE:

SMITH & WARREN, BLACKINTON or Equivalent

MODEL: SW-C288-LF-SM-DE*

FINISH: GOL-RAY

ENAMEL: ALL LETTERING AND POINTS OF STAR TO BE FILLED WITH DARK BLUE ENAMEL

CENTER SEAL: FULL COLOR SEAL-STATE OF LOUISIANA (LA2)

ATTACHMENT: SCREW BACK OR WALLET CLIP (DEPENDING IF USED FOR HAT BADGE OR WALLET BADGE)

AVAILABLE FOR REFURBISHING

L.P. & S.O. COLLAR INSIGNIA:

SMITH & WARREN or Equivalent

MODEL: C501M-2

FINISH: GOLD ELECTROPLATE W/E-COAT*

SIZE: ½"

SPECIFICATIONS: 2 CHARACTER HAND ASSEMBLED SOLID BRASS ON BARS, WITH PERIODS

ATTACHMENT: 2 CLUTCHBACK

AVAILABLE FOR REFURBISHING

UNIFORM SPECIFICATIONS

**SCUBA DIVER PIN:
SMITH & WARREN or Equivalent**

MODEL: 17C158_SCUBA_DIVER_PC
FINISH: Gold Finish
SPECIFICATIONS: SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: SINGLE CLUTCHBACK SIZE: 1" width



**OPERATOR PIN:
CENTERMASS**

MODEL: C288_OPERATOR
FINISH: GOL-RAY ATTACHMENT: SINGLE CLUTCHBACK



**ANGEL PIN:
SMITH & WARREN or Equivalent**

MODEL: C288_ANGEL_LP
FINISH: GOL-RAY
SPECIFICATIONS: SOLID BRASS, GOLD ELECTROPLATE ATTACHMENT: SINGLE CLUTCHBACK



**HONOR GUARD PIN:
SMITH & WARREN or Equivalent**

MODEL: A4560A
ENAMEL: BACKGROUND FILLED WITH BLACK ENAMEL
SPECIFICATIONS: 7/16" HIGH BY 1.5"WIDE, SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: 2 CLUTCHBACK

UNIFORM SPECIFICATIONS

BIKE PATROL PIN:
SMITH & WARREN or Equivalent

MODEL: A4560X
ENAMEL: BACKGROUND FILLED WITH BLUE ENAMEL
SPECIFICATIONS: ¼" HIGH BY 1"WIDE, SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: 2 CLUTCHBACK

F.T.O. PIN:
SMITH & WARREN or Equivalent

MODEL: A4560M
ENAMEL: BACKGROUND FILLED WITH BLACK ENAMEL
SPECIFICATIONS: ¼" HIGH BY 1" WIDE, SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: 2 CLUTCHBACK

MOTORCYCLE WINGS:
SMITH & WARREN or Equivalent



MODEL: C639
SPECIFICATIONS: SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: SINGLE CLUTCHBACK

FLAG PIN:
SMITH & WARREN or Equivalent

MODEL: C524
ENAMEL: BACKGROUND FILLED WITH RED, WHITE & BLUE ENAMEL
SPECIFICATIONS: SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: SINGLE CLUTCHBACK

CORRUGATED STAR:
SMITH & WARREN or Equivalent

MODEL: C521F
SPECIFICATIONS: 3/16" HIGH, SOLID BRASS, GOLD ELECTROPLATE
ATTACHMENT: NONE

UNIFORM SPECIFICATIONS

**LEATHER BADGE WALLET:
D & K BADGE WALLET or Equivalent**

MODEL: DK52D
BADGE: 576
SPECIFICATIONS:

1. Duty Leather
2. Hidden Badge
3. Double ID Case
4. Embossed with Lafourche Parish Sheriff's Office Seal and Name on front

**MOCK DICKEY
PUDALA MODEL 109 or Equivalent**

5. 100% COTTON
6. LYCRA IN COLLAR FOR STRETCH
7. BLACKIN COLOR
8. L.P.S.O. EMBROIDERED ON LEFT SIDE IN 1" HIGH GOLD THREAD



UNIFORM SPECIFICATIONS

EPAULETTES

EISMAN LUDMAR CO. or Equivalent

CONSTRUCTION:

Shall be constructed of 100% polyester colorfast midnight blue, twill weave. Fabric weight 10-10.5 oz. Fabric is to be backed (bonded) with 4 oz. cotton sheeting interfacing material. All seams are back-tacked shut. With top stitching at top and bottom edges to prevent fraying or opening of seams, using poly-core thread of matching color. Seam and border stitching shall be done on a lock stitch machine. Chain stitch is not allowed.

DIMENSIONS:

Epaulette are measured a height of 4.25", with the top edge measuring 1.875", and the bottom edge measuring 2.25". Two 1/8" stripes will be embroidered along the wide end. The first stripe 1/4" from the edge, with a spacing of 1/4" between the first and second stripe. Stripes are embroidered so it wraps around the sides.

Insignia Positioning: Rank: To begin 1/2" above the top stripe. All insignia to be centered between the sides. Insignia size to match dimensions of standard US Military shoulder board insignia.

EMBROIDERY:

Thread color to match standard US Navy gold or silver Mylar as appropriate for specified rank.

ORIGIN:

Made in USA.

UNIFORMS SPECIFICATIONS

**CLASS A UNIFORM STANDARD SHORT SLEEVE SHIRT- WHITE
WOMEN'S SHIRT SPECIFICATIONS**

ELBECO Item: Z9813LCN TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

Color


White

STYLE

Dress style, top center placket front with zipper, full cut tapered fit, convertible collar, short sleeves, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR

Convertible collar shall be one piece. Collar points to measure 2 7/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.




FRONT

Each front shall have a facing approximately 3" in width. The right front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 6 buttons and buttonholes on the front; spacing between each will be 3-1/2" except the spacing between the neck button and the first button on the front, which will be 2 1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. An 11 1/2" nylon zipper, to be set below the second button and buttonhole, shall accomplish front closure. The top, second and bottom buttons to be attached to the left front, the balance to be sewn over the buttonholes on the right front.



SHOULDER STRAPS

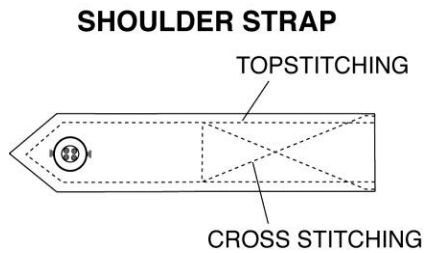


shoulder boards can be utilized.

Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so

BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.


BADGE TAB

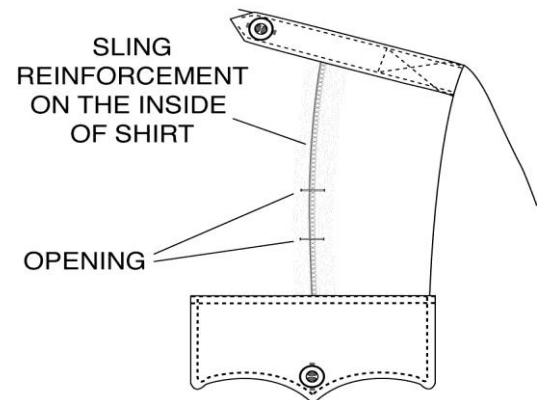

POCKET

POCKETS

Two breast patch pockets with mitered corners and 1-1/4" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5" wide, 5" deep. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

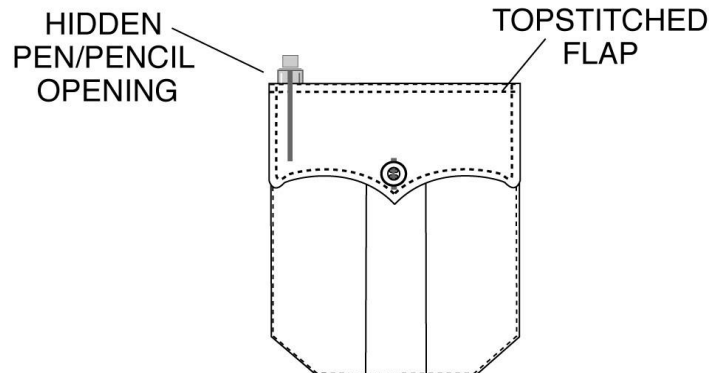


FLAPS

Two piece deep scalloped design to measure 5-1/4" across and 2-1/4" in depth at center point, 1-3/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/4". (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

FLAP

TOPSTITCHED FLAP



SLEEVES

Sleeves are to be straight and whole and to have a ¾" hem and to finish at a minimum of 8½" long from shoulder seam.

BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, and pocket flaps to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.
Mic opening to be sewn shut.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, pocket flaps and top center to be interlined with #250 Dacron.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars and flaps are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:

Bust Sizes 28-52

**CLASS A UNIFORM STANDARD SHORT SLEEVE SHIRT – BLUE
WOMEN'S SHIRT SPECIFICATIONS**

ELBECO Item: Z9813LCN TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR


Medium Blue

STYLE

Dress style, top center placket front, full cut tapered fit, convertible collar, short sleeves, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR

Convertible collar shall be one piece. Collar points to measure 2 7/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under-side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.




FRONT

Each front shall have a facing approximately 3" in width. The right front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 6 buttons and buttonholes on the front; spacing between each will be 3-1/2" except the spacing between the neck button and the first button on the front, which will be 2 1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. With Zipper



SHOULDER STRAPS

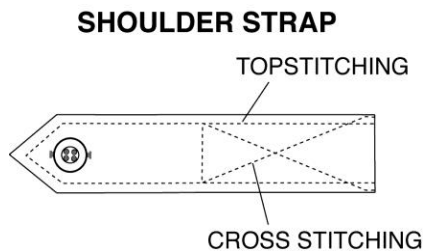


Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so

shoulder boards can be utilized.

BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.

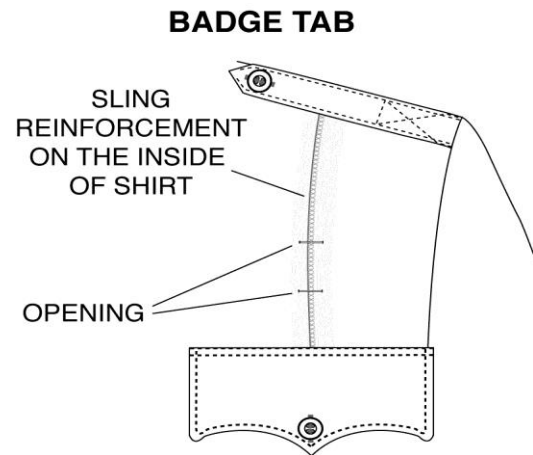


POCKETS


Two breast patch pockets with mitered corners and 1-1/4" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5" wide, 5" deep. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

FLAPS

Two piece deep scalloped design to measure 5-1/4" across and 2-1/4" in depth at center point, 1-3/4" at sides. Secured to shirt front approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/4". (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

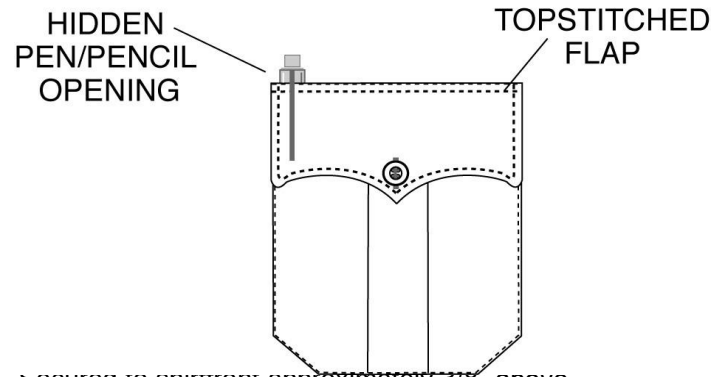

FLAP

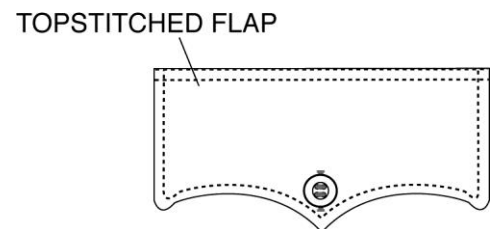

SLEEVES

Sleeves are to be straight and whole and to have a ¾" hem and to finish at a minimum of 8½" long from shoulder seam.

BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, and pocket flaps to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, pocket flaps and top center to be interlined with #250 Dacron.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars and flaps are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:
Bust Sizes 28-52

UNIFORM SPECIFICATIONS

**CLASS A STANDARD UNIFORM SHORT SLEEVES – WHITE
MEN'S SHIRT SPECIFICATIONS**

ELBECO Item: Z3313N TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR


White

STYLE

Dress style, top center placket front with zipper, full cut tapered fit, convertible collar, short sleeves, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR

Convertible collar shall be one piece. Collar points to measure 3-1/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under-side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.




FRONT

Each front shall have a facing approximately 3" in width. The left front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3-3/4" except the spacing between the neck button and the first button on the front, which will be approximately 2 1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15" nylon zipper, to be set below the second button and buttonhole, shall accomplish front closure. The top, second and bottom buttons to be attached to the right front, the balance to be sewn over the buttonholes on the left front.



SHOULDER STRAPS

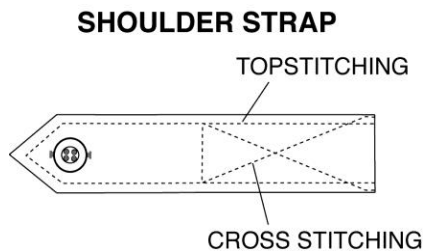


Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so

shoulder boards can be utilized.

BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.


BADGE TAB

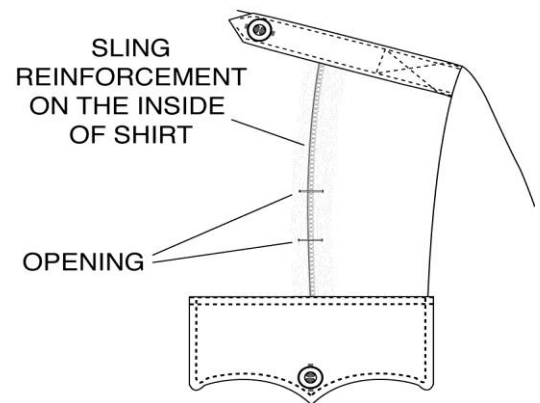

POCKETS

Two breast patch pockets with mitered corners and 1-1/2" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5-5/8" wide, 6" deep. Left breast pocket to have 1- 1/2" pencil slot. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.


POCKET

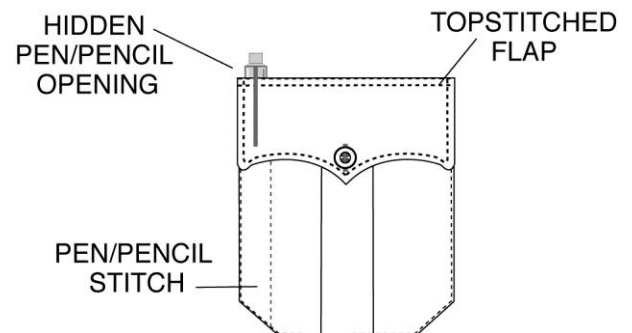

FLAPS

Two piece deep scalloped design to measure 5-7/8" across and 2-3/4" in depth at center point, 2-1/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/2" to correspond precisely with pencil slot of pocket. (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

FLAP

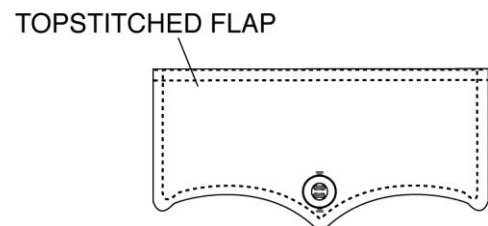

SLEEVES

Sleeve are to be straight and whole and to have a $\frac{3}{4}$ " hem and to finish at a minimum of 9 $\frac{1}{2}$ " long from shoulder seam.

BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, and pocket flaps to be topstitched $\frac{1}{4}$ " off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, pocket flaps and top center to be interlined with #250 Dacron.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars and flaps are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:

Neck sizes: 14- $\frac{1}{2}$ to 18- $\frac{1}{2}$, 19, 20, 21, 22

UNIFORM SPECIFICATIONS
CLASS A STANDARD UNIFORM SHIRT SHORT SLEEVE – BLUE
MEN'S SHIRT SPECIFICATIONS

ELBECO Item: Z3313N TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR


Medium Blue

STYLE

Dress style, top center placket front with zipper, full cut tapered fit, convertible collar, short sleeves, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR

Convertible collar shall be one piece. Collar points to measure 3-1/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under-side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.




FRONT

Each front shall have a facing approximately 3" in width. The left front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3-3/4" except the spacing between the neck button and the first button on the front, which will be approximately 2 1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable. A 15" nylon zipper, to be set below the second button and buttonhole, shall accomplish front closure. The top, second and bottom buttons to be attached to the right front, the balance to be sewn over the buttonholes on the left front.




SHOULDER STRAPS

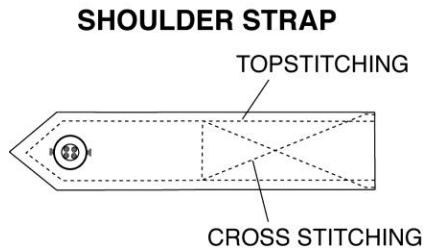

Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so shoulder boards can be utilized.


BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.

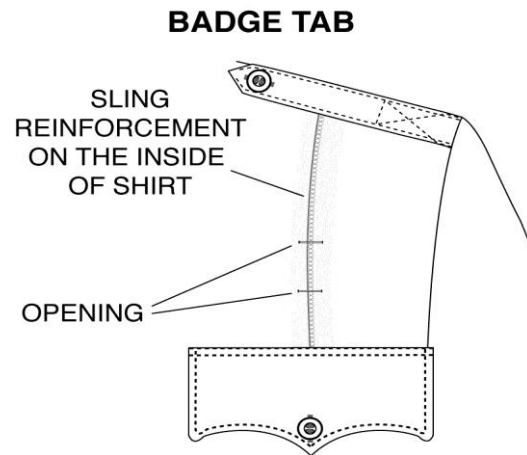


POCKETS

Two breast patch pockets with mitered corners and 1-1/2" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5-5/8" wide, 6" deep. Left breast pocket to have 1- 1/2" pencil stitch. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

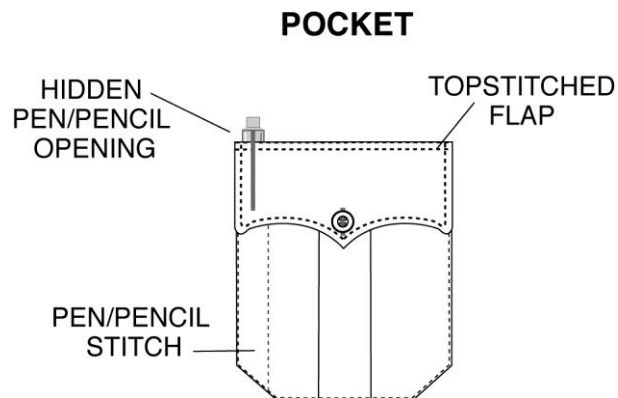

FLAPS

Two piece deep scalloped design to measure 5-7/8" across and 2-3/4" in depth at center point, 2-1/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/2" to correspond precisely with pencil slot of pocket. (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

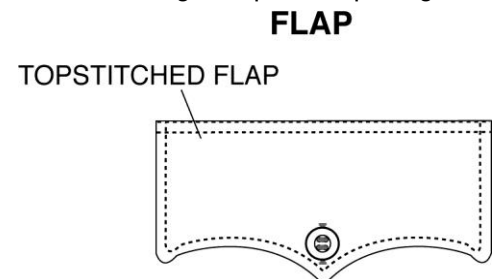

SLEEVES

Sleeve are to be straight and whole and to have a $\frac{3}{4}$ " hem and to finish at a minimum of 9 $\frac{1}{2}$ " long from shoulder seam.

BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, and pocket flaps to be topstitched $\frac{1}{4}$ " off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, pocket flaps and top center to be interlined with #250 Dacron.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars and flaps are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:

Neck sizes: 14- $\frac{1}{2}$ to 18- $\frac{1}{2}$, 19, 20, 21, 22

UNIFORM SPECIFICATIONS

**CLASS A STANDARD UNIFORM SHIRT – LONG SLEEVE – WHITE
WOMEN’S SHIRT SPECIFICATIONS**

ELBECO Item: Z9313LCN TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR:


White

STYLE

Dress style, top center placket front, full cut tapered fit, convertible collar, long sleeves with barrel cuffs, and dress shirrtail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR

Convertible collar shall be one piece. Collar points to measure 2 7/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under-side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.




FRONT

Each front shall have a facing approximately 3" in width. The right front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 6 buttons and buttonholes on the front; spacing between each will be 3-1/2" except the spacing between the neck button and the first button on the front, which will be 2 1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable.



SHOULDER STRAPS


SHOULDER STRAP



Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so shoulder boards can be utilized.


BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.

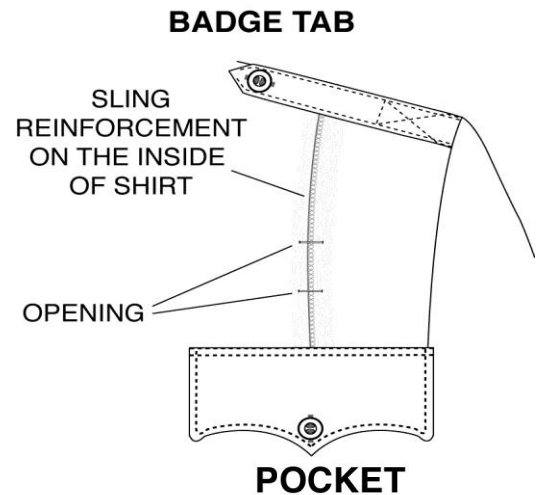


POCKETS

Two breast patch pockets with mitered corners and 1-1/4" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5" wide, 5" deep. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

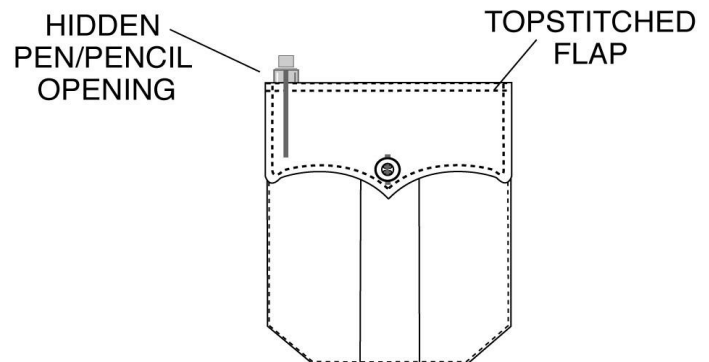

FLAPS

Two piece deep scalloped design to measure 5-1/4" across and 2-1/4" in depth at center point, 1-3/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/4". (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

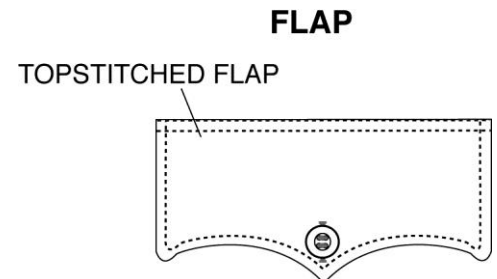


SLEEVES

Sleeve vent shall be a minimum of 4-1/2" long with one-piece top and bottom facings. Facing to measure 1-1/8" wide point blocked at top.

CUFFS

Two piece 1/2-inch hemmed cuff with 1/4" topstitching. Cuffs to measure 2 1/2" in depth with rounded corners (barrel cuffs). Cuff to be two button adjustable.
Cuffs to have woven interlining of #250 Dacron.

ADJUSTABLE CUFF



BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, pocket flaps and cuffs to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, cuffs, pocket flaps and top center to be interlined with #250 Dacron.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars, flaps and cuffs are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:
Bust Sizes 28-52

Long Sleeve Lengths:

28, 30	Regular = 30"	
32, 34	Regular = 30"	Long = 31"
36, 38	Regular = 31"	Long = 32"
40, 42	Regular = 32"	Long = 33"
44, 46	Regular = 33"	Long = 34"
48 & Up	Regular = 34"	Long = 35"

UNIFORM SPECIFICATIONS
CLASS A STANDARD UNIFORM SHIRT – LONG SLEEVE – BLUE
WOMEN'S SHIRT SPECIFICATIONS

ELBECO Item: Z9313LCN TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR


Medium Blue

STYLE

Dress style, top center placket front, full cut tapered fit, convertible collar, long sleeves with barrel cuffs, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and banana band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR


Convertible collar shall be one piece. Collar points to measure 2 7/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 2 1/2" long, 3/8" minimum width, and to be fused to under-side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar topstitched 1/4" off the edge. Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.



FRONT

Each front shall have a facing approximately 3" in width. The right front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. Stitching on top center is not to be visible on the turn-back facing. The shirt will have 6 buttons and buttonholes on the front; spacing between each will be 3-1/2" except the spacing between the neck button and the first button on the front, which will be 2 1/2". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable.




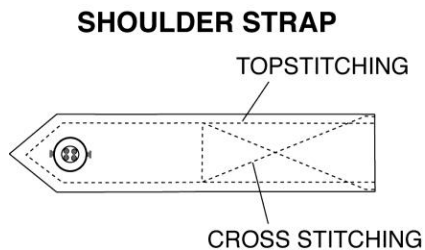

Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so shoulder boards can be utilized.


BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.

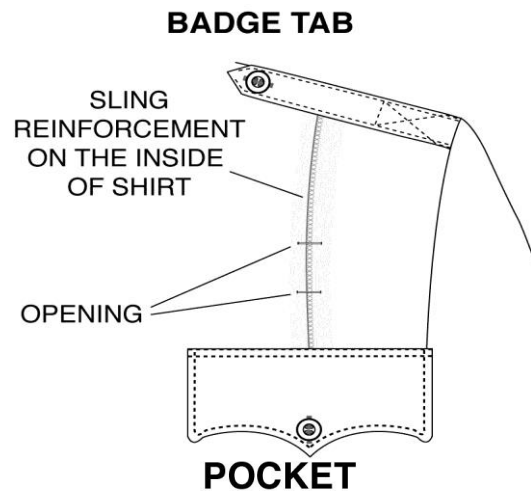


POCKETS

Two breast patch pockets with mitered corners and 1-1/4" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5" wide, 5" deep. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

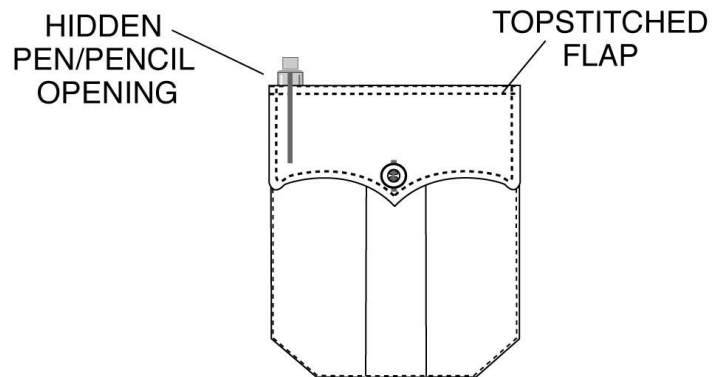

FLAPS

Two piece deep scalloped design to measure 5-1/4" across and 2-1/4" in depth at center point, 1-3/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/4". (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

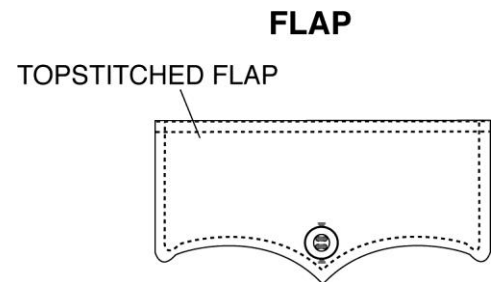

SLEEVES


Sleeve vent shall be a minimum of 4-1/2" long with one-piece top and bottom facings. Facing to measure 1-1/8" wide point blocked at top.

CUFFS

Two piece 1/2-inch hemmed cuff with 1/4" topstitching. Cuffs to measure 2 1/2" in depth with rounded corners (barrel cuffs). Cuff to be two button adjustable.

Cuffs to have woven interlining of #250 Dacron.

ADJUSTABLE CUFF



BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, pocket flaps and cuffs to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, cuffs, pocket flaps and top center to be interlined with #250 Dacron.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars, flaps and cuffs are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:

Bust Sizes 28-52

Long Sleeve Lengths:

28, 30	Regular = 30"	
32, 34	Regular = 30"	Long = 31"
36, 38	Regular = 31"	Long = 32"
40, 42	Regular = 32"	Long = 33"
44, 46	Regular = 33"	Long = 34"
48 & Up	Regular = 34"	Long = 35"

UNIFORM SPECIFICATIONS
CLASS A STANDARD UNIFORM SHIRT – LONG SLEEVE – WHITE
MEN'S SHIRT SPECIFICATIONS

ELBECO Item: Z313N TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR


White

STYLE

Dress style, top center placket front, full cut tapered fit, banded collar, long sleeves with barrel cuffs, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.


COLLAR & STAND

Collar points to measure 3-1/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 3" long, 3/8" minimum width, and to be fused to under-side of collar interlining. Stays applied directly to collar material itself unacceptable. Collar height at rear 1-1/2". Collar topstitched 1/4" off the edge. Collar stand to measure 1-5/16" at rear and band to be interlined with "Crease-N- Tack." Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.

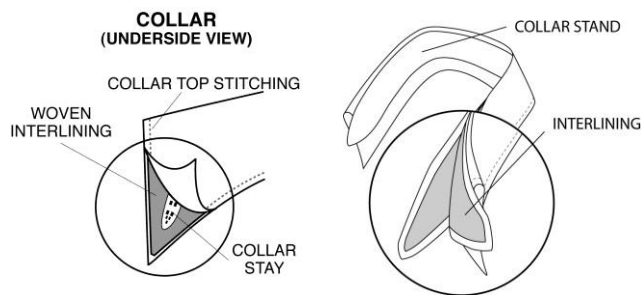


FRONT

The left front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3-3/4" except the spacing between the neck button and the first button on the front, which will be approximately 3 1/4". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable.




SHOULDER STRAPS

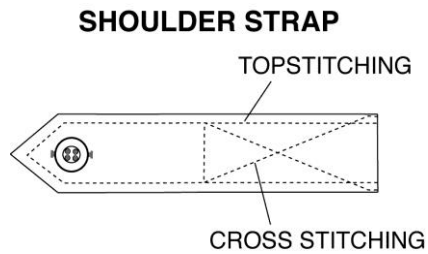

Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so shoulder boards can be utilized.


BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.

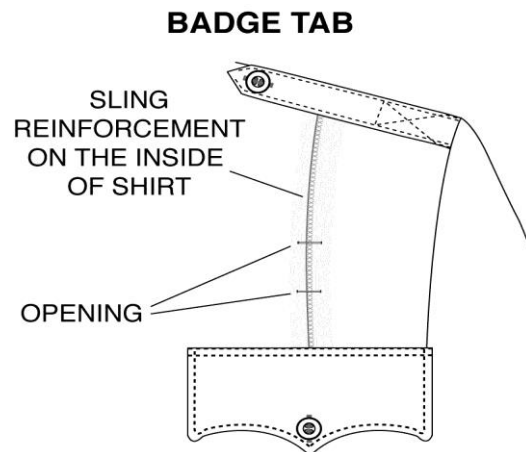


POCKETS

Two breast patch pockets with mitered corners and 1-1/2" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5-5/8" wide, 6" deep. Left breast pocket to have 1- 1/2" pencil stitch. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

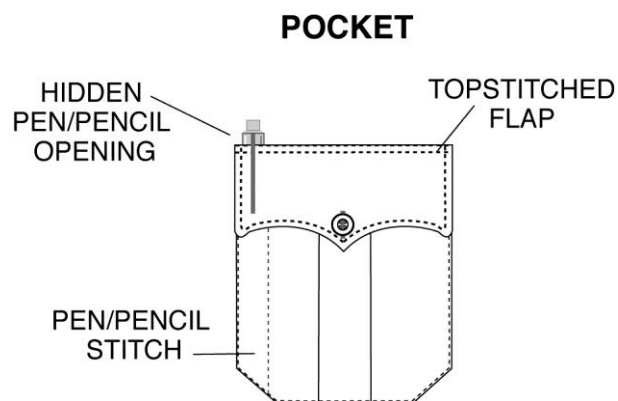

FLAPS

Two piece deep scalloped design to measure 5-7/8" across and 2-3/4" in depth at center point, 2-1/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/2" to correspond precisely with pencil slot of pocket. (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

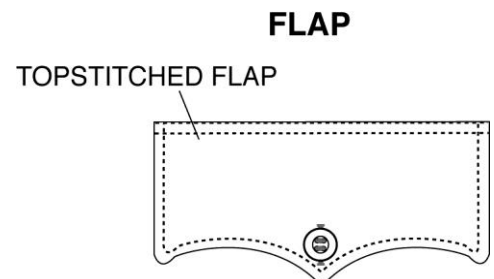


SLEEVES

Sleeve vent shall be a minimum of 4-1/2" long with one-piece top and bottom facings. Facing to measure 1-1/8" wide point blocked at top.

CUFFS

Two piece ½-inch hemmed cuff with 1/4" topstitching. Cuffs to measure 3" in depth with rounded corners (barrel cuffs). Cuffs to have two buttons and corresponding buttonholes set vertically with one button and buttonhole in center of facing. Cuffs to have woven interlining of #250 Dacron.



BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, pocket flaps and cuffs to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, cuffs, pocket flaps and top center to be interlined with #250 Dacron. Collar stand interlined with Crease-N-Tack.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars, flaps and cuffs are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:

Sleeve lengths: 32-37 inches

Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22

UNIFORM SPECIFICATONS
CLASS A STANDARD UNIFORM SHIRT – LONG SLEEVE – BLUE
MEN'S SHIRT SPECIFICATIONS

ELBECO Item: Z313N TEXTROP2 (with zipper) or Equivalent

FABRIC

Content
100% Textured Polyester with Visa System 3

Weight
7.0 to 7.5 oz. / linear yard

COLOR


MEDIUM BLUE

STYLE

Dress style, top center placket front, full cut tapered fit, banded collar, long sleeves with barrel cuffs, and dress shirttail. Two pleated breast pockets with topstitched scalloped flaps. Topstitched shoulder straps. Full badge reinforcement. Matching inside yoke and band of high lustre PolyTwill. Work wear industrial style shirt construction is unacceptable and shall be cause for rejection.

COLLAR & STAND


Collar points to measure 3-1/8" long with ultrasonically fused-in Mylar stays. Collar to have woven interlining of #250 Dacron. Stays to be 3" long, 3/8" minimum width, and to be fused to under-side of collar

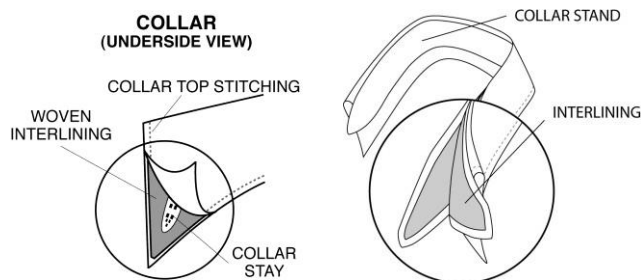


interlining. Stays applied directly to collar material itself unacceptable. Collar height at rear 1-1/2". Collar topstitched 1/4" off the edge. Collar stand to measure 1-5/16" at rear and band to be interlined with "Crease-N-Tack." Collar material itself (top or underside) shall have no fusing to Mylar stays or collar interlining.

FRONT

The left front shall have a top center placket 1-1/2" wide with two rows of stitches 7/8" apart. The shirt will have 7 buttons and buttonholes on the front; spacing between each will be 3-3/4" except the spacing between the neck button and the first button on the front, which will be approximately 3 1/4". Top center placket to have woven interlining of #250 Dacron. Non-woven interlining unacceptable and shall be cause for rejection. The fronts shall be joined to the yoke so that both raw edges of the yoke are turned under, with the front sandwiched between, and then all three are stitched down with a 1/16" raised stitch. Safety stitch joining unacceptable.




SHOULDER STRAPS

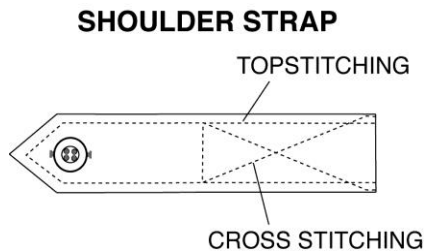

Shoulder straps to be two-piece pointed, 1/4" topstitched and to be set on yoke with leading topstitch conforming with front joining seam. To measure 2" at sleeve tapering to 1-3/8" and set not more than 1/2" from collar set seam. Cross-stitched approximately 2" from sleeve seam. Shoulder strap to have functional buttonhole to attach to sewn button on shoulder of shirt. Edge stitched shoulder strap construction unacceptable. With 24 ligne Gold "S" buttons. Fasten with toggle and washer. Reinforcement sling to be sewn under epaulet to prevent irritation of the button toggle. Sling fabric to match shirt fabric. Remove "X" stitch on epaulet so shoulder boards can be utilized.


BADGE REINFORCEMENT

Two-ply sling 1" wide centered over left pocket and stitched to shoulder seam and flap setting stitch. It shall have 2 (two) buttonhole eyelets 1-1/4" from top of pocket flap spaced 1-1/4" apart and centered on sling.

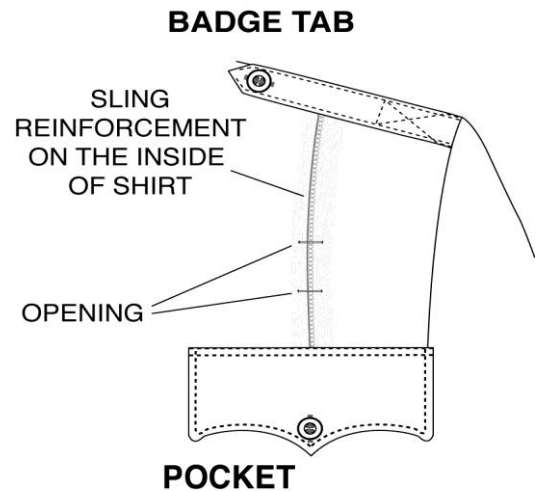


POCKETS

Two breast patch pockets with mitered corners and 1-1/2" stitched pleats. Pleats shall be stitched top and bottom and full length of pleat to prevent spreading. Pocket to measure 5-5/8" wide, 6" deep. Left breast pocket to have 1- 1/2" pencil stitch. Each pocket to have hook Velcro, 3/4" long by 1/2" wide, positioned on both edges of pocket to correspond with outer scalloped flap points as specified. Velcro to be stitched all sides and to be sewn through pocket and shirt for added reinforcement.

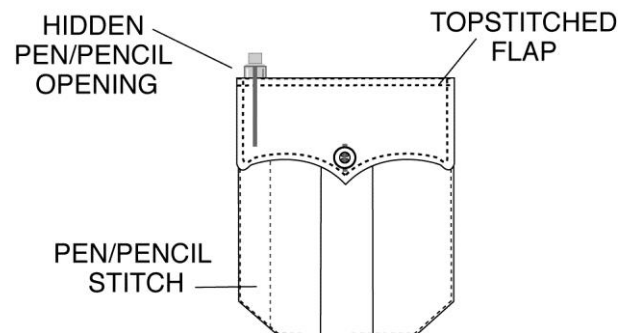

FLAPS

Two piece deep scalloped design to measure 5-7/8" across and 2-3/4" in depth at center point, 2-1/4" at sides. Secured to shirtfront approximately 3/8" above pocket. Left flap to have invisible pencil opening 1-1/2" to correspond precisely with pencil slot of pocket. (Stop & start stitching for pencil opening unacceptable and shall be cause for rejection.) Flaps to be 1/4" topstitched. Flaps to have woven interlining of #250 Dacron. Creased and edge stitched pocket flap construction unacceptable. Under side of the flap to have looped Velcro 3/4" long by 1/2" wide stitched all sides, positioned on outer points of both pocket flaps to secure with corresponding Velcro strips on shirt pocket. Each flap shall have a button centered on uncut sewn buttonhole. Pocket Flap to be merrowed with

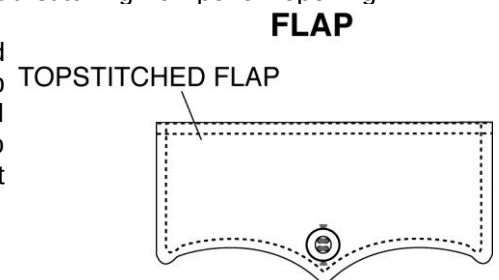


Dark Navy Colorfast thread. With Gold 24 ligne "S" buttons to fasten by toggle and washer.

SLEEVES

Sleeve vent shall be a minimum of 4-1/2" long with one-piece top and bottom facings. Facing to measure 1-1/8" wide point blocked at top.

CUFFS

Two piece 1/2-inch hemmed cuff with 1/4" topstitching. Cuffs to measure 3" in depth with rounded corners (barrel cuffs). Cuffs to have two buttons and corresponding buttonholes set vertically with one button and buttonhole in center of facing. Cuffs to have woven interlining of #250 Dacron.



BUTTONS

First grade 20-ligne melamine.

SEWING

Collar, shoulder straps, pocket flaps and cuffs to be topstitched 1/4" off the edge. Sleeve inserting and side close felling seams are to be safety stitched.

THREAD

All sewing threads to be color fast polyester wrap to match.

INTERLININGS

Collar, cuffs, pocket flaps and top center to be interlined with #250 Dacron. Collar stand interlined with Crease-N-Tack.

MILITARY CREASES

There shall be five stitched-in sharp military creases on all shirts. One crease on each front to be centered vertically. Front creases shall not be through pockets and flaps. Spacing for three military creases across shirt back to be proportionate to the size of the shirt.

CONSTRUCTION

Collars, flaps and cuffs are made with conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

STOCK SIZES

Shirts must be available in the following sizes:

Sleeve lengths: 32-37 inches

Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22

UNIFORM SPECIFICATIONS
WOMEN'S TROUSERS- CLASS A
WOMEN'S TROUSER SPECIFICATIONS

FLYING CROSS BY FECHHEIMER Item: TR070WT or Equivalent

FABRIC

Content
100% Polyester


Weight
12 - 12 ½ oz. per linear yard

Weave
Gabardine

Color
Dark Navy

STYLE

Garment shall be manufactured from an up-to-date women's pattern for comfort and easier sizing. The trouser styling shall be T-1: plain front, two (2) quarter top front pockets, and two (2) hip pockets professionally finished with no visible topstitching. Work wear industrial style construction is unacceptable and shall be cause for rejection. Piggy-back stripe ½" Mariners navy on ¾" lemon yellow cloth stripe sewn from the bottom of the pocket. Stripe to be turned/folded under at top of stripe by pocket. Stripe to be bar-tacked at top of stripe by pocket to prevent unraveling.




LINING MATERIAL


The pocketing and fly lining material shall be 70% Polyester / 30% Cotton, 2.9 oz. per square yard (60" width) with a minimum 78 x 48 count. Pocketing must have a durable press finish and the color of the pocketing must be black.

FREEDOM-FLEX WAISTBAND SYSTEM

Trouser shall be made with a special Freedom-Flex Waistband System that will allow the wearer waist expansion of 2 1/2" to 3". The waistband shall measure a minimum of 1-7/8" wide when finished. The flexible expansion split portion of the waistband shall be to the front of the trouser side seam and there shall be a ¾-inch wide side belt loop positioned to 'hide' the expansion split of the waistband.

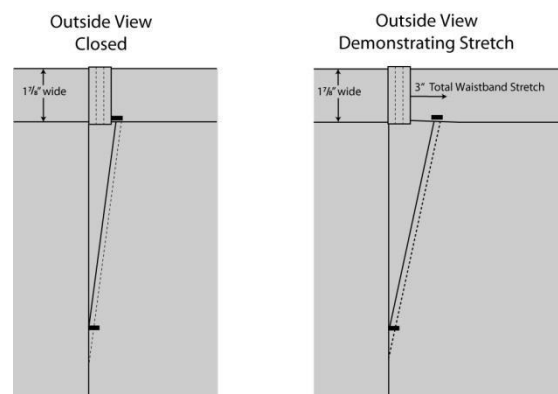

The waistband curtain shall consist of two different styles for maximum waistband expansion to enhance wearer comfort, fit, and appearance. The front of the trouser (to the expansion split) waistband curtain style shall



consist of a 2-inch wide elastic section that incorporates Tru-Grip, a ½" surface area composed of thin 55 gauge rubber for maximum comfort and performance. The Tru-Grip acts to help keep shirts tucked in securely. (Use of a single silicone strip or strips instead of ½" wide rubberized surface area shall be cause for rejection.)

The back half of the trouser waistband curtain shall finish a minimum 2-1/8" wide and is to be made of black pocketing material and shall be attached to the top of the trouser with a zigzag stitch. The waistband curtain must also contain Tru-Grip and will line up with the Tru-Grip on the front of the expansion split. (Substitution of a silicone strip or strips in place of Tru-Grip shall not be acceptable and shall be cause for rejection.)

The waistband curtain is composed of a wet laid non-woven canvas weighing 3.3 oz. per square yard. The canvas is covered in the same color and material as the pocketing. The ½" rubberized surface area is positioned 1-¼" up from the bottom of the curtain.

The specifications for the rubberized Tru-Grip curtain are as follows:

Width: 1-1/8-inch
Warp: 300 Denier Texturized Polyester
Filling: 300 Denier Texturized Polyester
Rubber: 55 Gauge
Count: 32-36 yarns per inch Contents:
59% Polyester/41% Rubber


To complete the Freedom-Flex Waistband System, there shall be a 1-1/4" wide elastic component sewn into the back half of the waistband curtain to allow for the stretch and recovery of the waistband to comfortably fit the wearer's waist size. There shall be a bartack for strength and durability sewn at the stress point on the waistband where it joins the front elasticized waistband curtain joining stitching (positioned, on the waistband above the front pocket.)

The waistband closure shall be accomplished with a single crush proof hook and eye centered on the waistband for wearer comfort. The hook and eye shall be reinforced with a 7/8" non-woven tape that is anchored with topstitching through and through to the top of the waistband (bartacks in place of topstitching shall be cause for rejection). In addition to the stitching of the waistband when it is set onto the trouser, the waistband must also be topstitched below the waistband seam of the trouser to be finished to allow for alterations (with ample fabric and curtain material to allow trouser size to be increased at least one size). The outlet in the seat is to be proportional to the waist outlet so the seat may also be let out. Seat seam must be sewn with a tandem needle machine (double-needle stitch) for maximum stretch.

BELT LOOPS


There shall be a minimum of seven belt loops 3/4" in width of double thickness. Each loop must have a non-woven interlining for added durability. All loops (except back center) must be sewn into the top and bottom of the waistband ("dropped" belt loops that are tacked to the outside of the trouser all around waist shall be cause for rejection). The top of the belt loops (except back center) shall be sewn into the waistband curtain seam with a Rocap machine using a zigzag stitch. The bottom of the center back loop shall be tacked to the trouser and the top of the loop tacked to the outside of the waistband to allow for easier waist alteration.

BELT LOOP



FLY

"J" STITCH



Trouser shall have a brass metal zipper with memory lock brass slider secured by metal stopper at base. There shall be a French Fly tab closure on the inside of the right fly. The tab shall be double ply made of the basic trouser fabric (tabs made of pocketing material or a "grown on" French Fly will be cause for rejection). The right fly shall be lined with the same material and color as the pocketing. The fly lining shall be sewn to the left fly continuing below the zipper into the crotch area in a neat and durable manner. A button shall be located on the left fly corresponding with the French Fly tab to provide a clean and comfortable closure. Topstitching of fly to be installed with automatic "J" stitch

equipment eliminating puckering and providing a clean finish. There shall be a firm straight bartack at the bottom of the fly going through the zipper tape for maximum strength. Bartack shall line up with starting point of "J" stitch.

SEAT


Seat must be sewn with a Tandem Needle Machine (double-needle stitch) for maximum durability.

POCKETS

The two (2) front pockets will be quarter top style with a minimum opening of 6" and a minimum depth of 4-1/2" measured from the bottom of the opening. Front pockets to have firm straight bartacks at bottom of pocket openings. Pockets shall be constructed using the stitch, turn, and topstitch method. Front pocket facing and barrier to be made of the basic trouser fabric. Facing shall be a minimum of 1" and barrier shall measure a minimum of 2" (measured to the inside edge of pocket lining).

The two (2) hip pockets shall have a minimum 5-3/8" wide (bartack to bartack) opening and a minimum depth of 5-3/4" measured from the bottom of the pocket opening. Hip pockets shall be constructed using

HIP POCKET WITH TAB

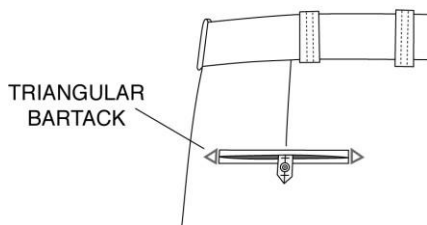

the double welt method on an automatic welt machine. The welts shall be finished in such a manner that there is no topstitching (topstitched hip pockets shall be cause for rejection). The corners of the hip pocket openings shall have triangular bartacks for reinforcement (use of straight bartacks shall be cause for rejection). Hip pocket facing and barrier are to be made of basic trouser fabric. Facing shall be a minimum of 3/4" and the barrier shall measure a minimum of 1-1/2". The left hip pocket shall have a centered tab made of basic cloth inserted into the top welt with bartacks at the top and bottom of the tab to form an opening for a button. A button shall be located below the bottom welt corresponding in location with the tab, which shall be

interlined with non-woven for added durability. There shall be a dart centered above each hip pocket to waistband. Dart shall be approximately 2-3/4" long tapered from 3/8" at waistband and shall be installed with automatic equipment for a clean non-puckered finish.


The watch pocket shall be located on the right front at the waistband. This pocket shall have a minimum opening of 2-5/8" and a minimum depth of 2-7/8". The front of the pocket shall be made of pocketing fabric and the back of the pocket shall be made of basic fabric and the two pieces are securely stitched together. Each corner of the pocket opening shall have firm straight bartacks.

CREASES

The leg creases, front and back will have a silicone bead put in by using the Lintrak process.

STITCHING, PRESSING & FINISHING

Trouser must be stitched with matching thread. Trouser must be neatly pressed on Hothead Presses and properly shaped. Outseams and inseams are edge serged on automatic equipment for uniformity of quality and shall be pressed open for a smooth pucker-free finish with repeated cleaning and pressing. Trouser must be cleaned and finished to eliminate loose threads.



STOCK SIZES

Trouser must be available from stock in the following sizes:

Women's 2 - 26

LABELS

Trouser must have a permanent label providing care instructions and small woven label indicating waist size. A removable paper ticket showing the size, fabric content, cut number, and WPL or RN number must be on the outside of the waistband. Ticket to be matchbook style installed with plastic staples for easy removal without damaging trouser material and showing size when trousers are stacked.

UNIFORM CLASSIFICATIONS
MEN'S TROUSERS – CLASS A
MEN'S TROUSER SPECIFICATIONS

FLYING CROSS BY FLECHHEIMER Item: TR070 OR EQUIVALENT

FABRIC

Content
100% Polyester

Weight
12 - 12 ½ oz. per linear yard

Weave
Gabardine

Color
Dark Navy

STYLE

Trouser shall be manufactured from an up-to-date men's uniform trouser pattern. The trouser styling shall be T-1: plain front, two (2) quarter top front pockets, and two (2) hip pockets professionally finished with no visible topstitching. Work wear industrial style construction is unacceptable and shall be cause for rejection. Piggy-back stripe ½" Mariners navy on ¾" lemon yellow cloth stripe sewn from the bottom of the pocket. Stripe to be turned/folded under at top of stripe by pocket. Stripe to be bar-tacked at top of stripe by pocket to prevent unraveling.




LINING MATERIAL


The pocketing and fly lining material shall be 70% Polyester / 30% Cotton, 2.9 oz. per square yard (60" width) with a minimum 78 x 48 count. Pocketing must have a durable press finish and the color of the pocketing must be black.

FREEDOM-FLEX WAISTBAND SYSTEM

Trouser shall be made with a special Freedom-Flex Waistband System that will allow the wearer waist expansion of 2 1/2" to 3". The waistband shall measure a minimum of 1-7/8" wide when finished. The flexible expansion split portion of the waistband shall be to the front of the trouser side seam and there shall be a ¾-inch wide side belt loop positioned to 'hide' the expansion split of the waistband.

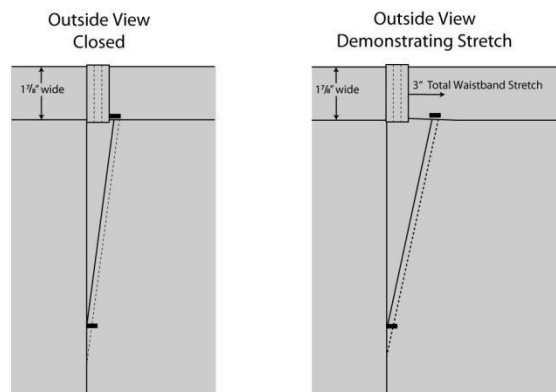

The waistband curtain shall consist of two different styles for maximum waistband expansion to enhance wearer comfort, fit, and appearance. The front of the trouser (to the expansion split) waistband curtain style shall consist of a



2-inch wide elastic section that incorporates Tru-Grip, a ½" surface area composed of thin 55 gauge rubber for maximum comfort and performance. The Tru-Grip acts to help keep shirts tucked in securely. (Use of a single silicone strip or strips instead of ½" wide rubberized surface area shall be cause for rejection.)

The back half of the trouser waistband curtain shall finish a minimum 2-1/8" wide and is to be made of black pocketing material and shall be attached to the top of the trouser with a zigzag stitch. The waistband curtain must also contain Tru-Grip and will line up with the Tru-Grip on the front of the expansion split. (Substitution of a silicone strip or strips in place of Tru-Grip shall not be acceptable and shall be cause for rejection.)

The waistband curtain is composed of a wet laid non-woven canvas weighing 3.3 oz. per square yard. The canvas is covered in the same color and material as the pocketing. The ½" rubberized surface area is positioned 1-¼" up from the bottom of the curtain.

The specifications for the rubberized Tru-Grip curtain are as follows:

Width: 1-1/8-inch
Warp: 300 Denier Texturized Polyester
Filling: 300 Denier Texturized Polyester
Rubber: 55 Gauge
Count: 32-36 yarns per inch Contents:
59% Polyester/41% Rubber


To complete the Freedom-Flex Waistband System, there shall be a 1-1/4" wide elastic component sewn into the back half of the waistband curtain to allow for the stretch and recovery of the waistband to comfortably fit the wearer's waist size. There shall be a bartack for strength and durability sewn at the stress point on the waistband where it joins the front elasticized waistband curtain joining stitching (positioned, on the waistband above the front pocket.)

The waistband closure shall be accomplished with a single crush proof hook and eye centered on the waistband for wearer comfort. The hook and eye shall be reinforced with a 7/8" non-woven tape that is anchored with topstitching through and through to the top of the waistband (bartacks in place of topstitching shall be cause for rejection). In addition to the stitching of the waistband when it is set onto the trouser, the waistband must also be topstitched below the waistband seam of the trouser to be finished to allow for alterations (with ample fabric and curtain material to allow trouser size to be increased at least one size). The outlet in the seat is to be proportional to the waist outlet so the seat may also be let out. Seat seam must be sewn with a tandem needle machine (double-needle stitch) for maximum stretch.

BELT LOOPS

There shall be a minimum of seven belt loops 3/4" in width of double thickness. Each loop must have a non-woven interlining for added durability. All loops (except back center) must be sewn into the top and bottom of the waistband ("dropped" belt loops that are tacked to the outside of the trouser all around waist shall be cause for rejection). The top of the belt loops (except back center) shall be sewn into the waistband curtain seam with a Rocap machine using a zigzag stitch. The bottom of the center back loop shall be tacked to the trouser and the top of the loop tacked to the outside of the waistband to allow for easier waist alteration.

BELT LOOP



FLY



Trouser shall have a brass metal zipper with memory lock brass slider secured by metal stopper at base. There shall be a French Fly tab closure on the inside of the right fly. The tab shall be double ply made of the basic trouser fabric (tabs made of pocketing

material or a "grown on" French Fly will be cause for rejection). The right fly shall be lined with the same material and color as the pocketing. The fly lining shall be sewn to the left fly continuing below the zipper into the crotch area in a neat and durable manner. A button shall be located on the left fly corresponding with the French Fly tab to provide a clean and comfortable closure. Topstitching of fly to be installed with automatic "J" stitch equipment eliminating puckering and providing a clean finish. There shall be a firm straight bartack at the bottom of the fly going through the zipper tape for maximum strength. Bartack shall line up with starting point of "J" stitch.


SEAT

Seat must be sewn with a Tandem Needle Machine (double-needle stitch) for maximum durability.

POCKETS

The two (2) front pockets will be quarter top style with a minimum opening of 6" and a minimum depth of 5-3/4" measured from the bottom of the opening. Front pockets to have firm straight bartacks at top and bottom of pocket openings. Pockets shall be constructed using the stitch, turn, and topstitch method. Front pocket facing and barrier to be made of the basic trouser fabric. Facing shall be a minimum of 1" and barrier shall measure a minimum of 2" (measured to the inside edge of pocket lining).

The two (2) hip pockets shall have a minimum 5-3/8" wide (bartack to bartack) opening and a minimum depth of 5-3/4" measured from the bottom of the pocket opening. Hip pockets shall be constructed using

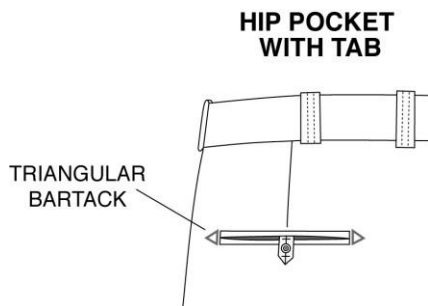

the double welt method on an automatic welt machine. The welts shall be finished in such a manner that there is no topstitching (topstitched hip pockets shall be cause for rejection). The corners of the hip pocket openings shall have triangular bartacks for reinforcement (use of straight bartacks shall be cause for rejection). Hip pocket facing and barrier are to be made of basic trouser fabric. Facing shall be a minimum of 3/4" and the barrier shall be a minimum of 1-1/2". The left hip pocket shall have a centered tab made of basic cloth inserted into the top welt with bartacks at the top and bottom of the tab to form an opening for a button. A button shall be located below the bottom welt corresponding in location with the tab, which shall be interlined with non-woven for

added durability. There shall be a dart centered above each hip pocket to waistband. Dart shall be approximately 2-3/4" long tapered from 3/8" at waistband and shall be installed with automatic equipment for a clean non-puckered finish.


The watch pocket shall be located on the right front at the waistband. This pocket shall have a minimum opening of 2-5/8" and a minimum depth of 2-7/8". The front of the pocket shall be made of pocketing fabric and the back of the pocket shall be made of basic fabric and the two pieces are securely stitched together. Each corner of the pocket opening shall have firm straight bartacks.

CREASES

The leg creases, front and back will have a silicone bead put in by using the Lintrak process.

STITCHING, PRESSING & FINISHING

Trouser must be stitched with matching thread. Trouser must be neatly pressed on Hothead Presses and properly shaped. Outseams and inseams are edge serged on automatic equipment for uniformity of quality and shall be pressed open for a smooth pucker-free finish with repeated cleaning and pressing. Trouser must be cleaned and finished to eliminate loose threads.



STOCK SIZES

Trouser must be available from stock in the following sizes:

Even Waist Sizes 28-54

LABELS

Trouser must have a permanent label providing care instructions and small woven label indicating waist size. A removable paper ticket showing the size, fabric content, cut number, and WPL or RN number must be on the outside of the waistband. Ticket to be matchbook style installed with plastic staples for easy removal without damaging trouser material and showing size when trousers are stacked.

UNIFORM SPECIFICATIONS

EXPLORER UNIFORM SHORT SLEEVE SHIRTS SPECIFICATIONS

Southeastern Code “3” Men’s Style 3206 and Ladies Shirt Style L 3206
or Equivalent
Made In U.S.A.

FABRIC

Content

65% polyester and 35% cotton

Weave

Poplin 5.0 oz. per yard. Visa III preshrunk positive release finish with moisture wicking

Color

Grey

FRONTS

Left front to have a self fabric center pleat 1 1/2" wide extending from collar band to bottom of shirt held down with two rows of stitching. The center pleat to be lined with 100% polyester, 250 denier. Right and left fronts to have an approximately 3" turn back extending from collar to bottom of shirt. There shall be six front and one collar button. The shirt is to have sewn in permanent military creases, 1 in each front and 3 in the back.

COLLAR

The collar is to be die cut. Convertible collar is to measure 3 1/4" long at points and topstitched 1/4" from edge. The interlinings are to be 100% polyester. Permanent collar stays of proper length are to be fused inside the collar so that no stitches are made thru the bottom leaf.

YOKE

Two piece yoke of self goods to measure approximately 3 3/4" at bottom center of band.

SLEEVES

Sleeves are to be one piece, have a 1" hem and finish 10" long from the shoulder seam. Sleeve setting and closing shall be done with an overedge and safety stitch. The sleeve is to be bartacked at the hem

POCKETS

To have two breast pockets with mitered corners to finish 5 1/2" wide and 5 3/4" long. The left breast pocket to have a pencil opening about 1 3/8". Both pockets to have a 1 1/2" box pleat stitched top and bottom to prevent spreading. Velcro placed on edges.

FLAPS

Flaps to be die creased to give uniform shape and size. Flaps to be scalloped, to finish 5 3/4" in width and 2 1/2" in length at the sides, 2 3/4" at the center. Flaps to be secured to front of shirt approximately 1/2" above top of pocket. The left flap to have a pencil opening about 1 3/8" in width. Velcro to be placed on corners of each flap to correspond with velcro on pockets. Flap shall be lined with a good grade and quality interlining.

BADGE TABS

Inside sling type of self goods approximately 1 1/2" wide to extend from joining seam to pocket of left front. To have two small uncut buttonholes 1 1/4" apart with the lower buttonhole approximately 1 1/4" above flap.

SHOULDER STRAPS

To be sewn into sleevehead seam and measure approximately 2" tapering to 1 1/2" with end pointed. Straps to be set approximately 1" from collar seam. They shall be box stitched to shoulders with a row of cross stitching 2" from sleevehead and diagonally sewn from each end of seam to the sleeve. Shall be lined with a good grade and quality interlining. Must be able to accommodate black should epaulettes.

COLLAR STAYS

The collar stays shall be of good quality staler vinyl, of proper length.

INTERLININGS

Collar and center-facing will be of 100% polyester interlinings. Flaps and straps shall be lined with a good grade of crease-n-tack.

SIZE MARKING

Size tab to be sewn in with neck label to the inside yoke of shirt.

BUTTONS

All buttons shall be made from thermosetting polyester material and must match fabric.

PRESSING AND PACKING

Shirts shall be carefully pressed by hand in a first class manner. Shirts to be shipped in strong boxes so as not to be damaged in shipment. Shirts to be packed in individual polyethylene bags.

LADIES SHIRTS

Ladies shirts to have same features as Men's except on a ladies pattern.

ZIPPER FRONT SHIRTS

To be YKK nylon separating zipper with nylon coil, matching binder seam, coordinated color for all components, all molded plastic. The zipper is to be sandwiched between fronts and to extend from the second to the sixth buttonhole with the stitch to be concealed under the center strip.

Men's Neck sizes: 14-22 Ladies bust sizes: 30-50

UNIFORM SPECIFICATIONS

EXPLORER TROUSERS G & K Serv. Co #21403 (717020) SPECIFICATIONS

FABRIC

Content

100% Polyester

Weave

11.5-12 oz. Tropical Weave

COLOR

Grey

FEATURES

At-Ease™ slide adjustment waist band for additional comfort
Lined 7/8" inserted belt loops
Quarter top front pocket
Two back pockets with button tab on left pocket
Bar tacks at stress points for durability
Machine washable
½" grey stripe sewn to waistband. Pant stripe to match shirt color.



Size Chart	Item Number
<u>Men's – I: 28-66</u>	7002HE Men's Heather Grey
<u>Women's – J: 2-26</u>	7002HWE Women's Heather Grey

UNIFORM SPECIFICATIONS

MOTORCYCLE PANTS

FABRIC

Content

Raeford 10.5 oz textured woven gabardine 100% Dacron polyester.

WAISTBAND

The waistband must be a minimum of 2" wide and closed with a crushproof hook and eye, the eye being bartacked for stability. The waistband curtain shall have three strand snugtex and be 65 % polyester and 35% cotton with a press-to-last finish, and match the color of the pocketing, attached with a rocap machine. Waistband stiffener $\frac{3}{4}$ " in width shall be sewn into the waistband on the front of the trouser seam to side seam. The breeches are to have a continuous closed waistband.

BELTLOOPS

There should be a minimum of 7 belt loops on all sizes over 30, with a lesser number on smaller sizes. Each loop is to be $\frac{3}{4}$ " wide of double thickness, and stitched on the face side with a 2" needle machine. Expect for the back belt loops which shall be tacked on. All loops shall be sewn into the waistband and shall accommodate a 1 5/8" belt.

POCKETING

The pocketing shall be matching 65/35 polyester/cotton material stitched, turned and top stitched. Merrowed edges surged and sewn will not be accepted.

POCKETS

the front pocket opener will be a minimum of 6.5" and be 6" deep from the bottom of the opening. They shall be stitched, turned and re-stitched. The inside front pocket facing shall be a separate piece of self-material finishing no less than 1 $\frac{1}{4}$ " wide. The back pockets will have a minimum opening of 5.5" and be 6" deep, and be finished on the outside with an exposed top and bottom. The front pockets shall have a straight bartack and the back pockets shall be bartacked with a triangular bartacking machine.

MEASUREMENTS

Eight different measurements are required for these breeches: waist, hip, inseam, outseam, thigh, knee, calf, ankle, height, weight.

STRIPE

$\frac{3}{4}$ " lemon yellow stripe, 100% polyester sewn to waistband.

STIRRUPS

1" black elastic stirrups on bottom of each pant leg.

BARTACKS

Triangle bartacks shall be placed at each corner of the back pockets. It is to form an exact 60 degree angle at each point and each leg of the triangle is to be no more than 9/16" in length. There is to be no less than four stitches along the line of the leg and is to be repeated three times, making a total of 12 longitudinal stitches in each leg triangle. The front pockets will have a straight heavy bartack in the side seams for extra strength.

ZIPPERS

The breeches shall be closed with a Talon 42 Memory Lock Zipper. The zipper tape must be treated for Pres-Tu-Last finishing. There shall be a brass bottom stop at the base of the zipper chain. A straight bartack shall be sewn through from the outside of the garment to the inside at the bottom of the fly. It shall be sewn through the zipper tape, the right and left fly, and the right fly lining. The right and left fly shall be joined by an additional bartack located below the bottom zipper stop on the side of the breeches. This bartack will reduce stress on the left fly and zipper.

ZIPPER LEGS

The legs shall have a zipper leg closure using a Talon 42 Memory Lock Zipper and to be fastened and the top with a metal bottom stop. The zippers are to have a 7/16" cotton tape on the black number 2901 with extensions to be 3/4" AB and 3/4" BE. Velcro closure can be substituted if the Department chooses.

REINFORCEMENTS

There shall be a knee and a seat reinforcement of self-material on the outer side.

SURGING

All surging to be done on the three thread surging machine in a good state of adjustment. Two thread surging will not be accepted.

SIZES: Custom measurements per deputy.

UNIFORM SPECIFICATIONS

RAIN PANTS SPECIFICATIONS

NEESE Item: NV9102 ET

GENERAL

Elastic waist high visibility trousers. The garment is constructed with a 250-denier oxford weave polyester fabric with a polyurethane breathable milky coating.

COLOR

1. High Visibility Lime Green

FEATURES

2. Elastic waist
3. 2 side slash openings
4. Take-up snaps on each cuff
Side Take up snaps on waist
5. 2 silver 8910 #M Scotchlite reflective tape. One located 3 ½" above the bottom hem and the other located 11" above the bottom hem.
6. Compliant with BS EN471:1994 European high visibility standards
7. Compliant with Class E high visibility background and retroflective material standards as listed in ANSI 107-1999

STITCHING

8. All stitching, except hems, are to be double needle stitched. All seams in the garment, except hems are sealed on the coated side of the fabric with a clear 7/8" wide urethane tape making the garment 100% waterproof.

FABRIC

9. Cloth Type 250- Denier Oxford weave polyester
Coating Type Polyurethane Breathable milky coating
Weight (oz/yd) 5.2
10. Thickness .19mm

SIZES: XS – 6X

UNIFORM SPECIFICATIONS

RAIN PARKA SPECIFICATIONS

NEESE Item: NV 9102APK

GENERAL

Parka length is to be a minimum of 34" long with adjustment for various sizes. The garment is constructed with a 250-denier oxford-weave polyester fabric with a polyurethane breathable milky coating.

COLOR

High visibility Lime Green

FEATURES

1. Stand up collar with zip closure for hood 3 piece body design
- 2.
3. 2 patch pockets with plastic snap closure
4. Zip front with storm flap and snap front closure
5. 2 piece tuck away hood with draw cord and 2 plastic barrel locks Inner pocket with 1 ½" hood n loop closure
6. ¾ elastic cuffs
7. Side access slits 2 with 2 snaps on lower sides of jacket
8. 2" silver 8910 3M Scotchlite reflective tape around chest, biceps, cuffs (4 ¼" from hem) and harness style over the shoulder.
9. Compliant with BS EN471:1994 high visibility standards
10. Compliant with Class 3 high visibility background and retroreflective material standards as listed in ANSI 107-1999.
11. SHERIFF wording on back.

STITCHING

All stitching is to be single needle stitched. All seams in the garment, except hems are sealed on the coated side of the fabric with a clear 7/8" wide urethane tape making the garment 100% waterproof.

FABRIC

Cloth Type 250-Denier Oxford weave Polyester
Coating type Polyurethane Breathable milky coating
Weight 5.2 Oz/yd
Thickness .19mm

SIZE: XS – 6XL

REVERSIBLE RAIN JACKET SPECIFICATIONS – UNISEX

Motorcycle Deputies

5010 Breathable by Neese Item:5010RJH3M

ANSI/ISEA 107 – 2015, Class 3 / Third Party Certified

TRI-LAMINATE FABRIC:

Black Face Fabric:

100% nylon oxford
200D x 300D
5.66 oz /sq yd

Hi-Visibility Lining Fabric:

100% polyester tricot in fluorescent yellow
50 denier
3.42 oz/sq yd

Laminate:

Hydrophilic monolithic waterproof/breathable film

Total fabric weight:

8.14 oz/sq yd



TRIM: 3M Scotchlite™ Reflective Material #8710
“SHERIFF” wording on back.

STYLE:

Hip length style with snap front. Generous full cut with raglan sleeves. Reversible raincoat with one side black and one side high-visibility fluorescent yellow. Features include: Convertible collar with hook and loop tab, side openings with snap closure, double storm flap snap front to prevent leakage, adjustable cuffs. Optional snap-off hood is available. All exposed seams are taped for waterproofness. Seam seal tape shall be a matching high-visibility yellow.

FRONT:

Center front closes with 5 snaps. The top snap is approximately 7/8” from the top edge. The remaining snaps are set at 5” intervals (center to center).

On the dark side of the coat: The right front has a double male snap. The left front has a double flap with female snaps that sandwich the right flap.

Both sides of the coat have a placket front.

2 rows of 2” silver reflective tape encircle the torso to provide 360° of visibility.

Both sides have a badge tab on left chest with two metal eyelets spaced 1 ¼” apart center to center. On the black side, there is a microphone tab for a radio.

SIDE VENTS:

One vent on each side permits access to duty belt. Vent is approximately 10” and closes with 2 snaps.

COLLAR:

The collar is made of two plies of face fabric. Collar points are 3 ¼”. A tab made from two plies of face fabric is set into the collar seam at the front edge. The 3” x ¾” tab has hook material (¾” x ¾”) on both sides. On the underside of the collar on the dark side, there is a 1” x ¾” piece of loop material to fasten

the tab when it is not is use. On both the high-visibility side and the dark side on the other side of the collar are 2 ½" x ¾" strips of loop material to provide adjustable neck closure.

SLEEVE:

Raglan style sleeve with 1" hem. Cuffs have an adjustable circumference with snaps as well as hook and loop tab. Cuff adjustment tab made from face fabric is sewn into the sleeve inseam on the dark side. The tab measures 1 5/8" wide at the base and tapers to 1 ¼" and is 1 ¾" in length. The underside of the tab has a strip of hook material 1 ½" x ¾" which aligns with a strip of loop material 6" x ¾" sewn to the sleeve. The loop material is approximately 1 ¾" from the sleeve edge. It begins 1 ½" from the inseam and extends around the front of the sleeve. Snaps are set approximately 2" on either side of the inseam, one male and one female snap. The snap caps are visible on the dark side of the coat. The snaps allow for cuff adjustment on the Hi-visibility side.

2 rows of 2" silver reflective tape encircle each sleeve to provide 360° of visibility. The stripe closest to the sleeve opening must be no closer than 1.97" to the sleeve edge.

LABELING:

Labels are compliant with ANSI requirements.

FIT:

This improved garment was designed with a generous, full cut so that a secondary layer could be worn under the raincoat for warmth. If a trimmer fit is desired, order one size smaller.

STOCK SIZES:

Regular: S, M, L, XL, 2XL, 3XL, 4XL, 5XL, 6XL

Long: M, L, XL 2XL, 3XL, 4XL, 5XL, 6XL

	Chest Measurement	Regular Back Length	Long Back Length	Regular Sleeve	Long Sleeve
Small:	34" - 36"	35"	35 ¾"	31"	32 ¾"
Medium:	38" - 40"	36"	36 ¾"	32"	33 ¾"
Large:	42" - 44"	37"	37 ¾"	34"	35 ¾"
XLG:	46" - 48"	38"	38 ¾"	36"	37 ¾"
2X:	50" - 52"	39"	39 ¾"	37"	38 ¾"
3X:	54"- 56"	40"	40 ¾"	38"	39 ¾"
4X:	58"- 60"	41"	41 ¾"	40"	41 ¾"
5X	62"- 64"	42"	42 ¾"	41"	42 ¾"
6X	66"-68"	43"	43 ¾"	42"	43 ¾"

REVERSIBLE RAIN PANT SPECIFICATIONS – UNISEX

Motorcycle Deputies

5010 Breathable by Neese Item: 5010RPT3M

TRI-LAMINATE FABRIC

Black Face Fabric

100% nylon oxford

200D x 300D

5.66 oz /sq yd

Hi-Visibility Lining Fabric

100% polyester tricot in fluorescent yellow

50 denier

3.42 oz/sq yd

Laminate

Hydrophilic monolithic waterproof/breathable film

Total fabric weight

8.14 oz/sq yd



STYLE

Pull on waterproof/breathable over pant designed to fit over uniform. Elasticized back waistband and adjustable snap closure at waist and legs. All exposed seams are taped for waterproofness. Seam seal tape shall be a matching high-visibility yellow.

LEGS

Straight leg design. Side leg bottom shall have an 18 ½" zipper closure. Zipper shall be concealed with a 1 ¼" storm flap on black facing and hi-visibility side. There shall be a snap adjustment tab at ankle inseam. Snaps are spaced 3 1/2" apart.

WAISTBAND

Back half of the waistband is elasticized for comfort and fit. A 7" vent on each side seam closes with a snap at the top. There is one female snap on the front portion of the waistband and two male snaps on the back portion of the waistband. The two male snaps are spaced 1 ¾" apart.

SEAMS AND WATERPROOFING

Front and back rise and inseams are lap-felled, double needle seams for strength and durability. These seams are also seam sealed with matching high-visibility yellow tape for waterproofness.

FIT

This improved garment was designed so that a trouser could be worn under the rain pant. If a trimmer fit is desired, order one size smaller.

STOCK SIZES

Regular: S, M, L, XL, 2XL, 3XL, 4XL, 5XL, 6XL

Short: S, M, L, XL, 2XL, 3XL, 4XL, 5XL, 6XL

	Waist Measurement	Regular inseam	Long inseam
Small:	34"	29"	30 ½"
Medium:	38"	29 ½"	31"
Large:	42"	30"	31 ½ "
XLG:	45"	30 ½"	32
2XL:	48"	31"	32 ½ "
3XL:	51"	31 ½"	33
4XL:	54"	32"	33 ½ "
5XL	58"	32 ½"	34
6XL	62"	33"	34 ½ "

UNIFORM SPECIFICATIONS

SNAP ON HOOD FOR MOTORCYCLE RAIN JACKET
5010 Breathable by Neese

SHELL FABRIC

2.5-3.0 oz. per square yard (uncoated) Nylon, plain weave, type 66, treated with fluorocarbon water & stain release agents. 2.0 oz. {+ or - 0.25 oz} polyurethane {pigmented to match fabric color} back coating shall resist oil, discoloration and be odor free. (Color: see specified garment color)

TRIM

Seam tape: two-layer polyurethane thermal tape 0.875 inches in width compatible with the polyurethane coating. (Color: clear)

Snap: 20 LIGNE, prong style with closed backs, non-rusting gunmetal finish on brass, heavy duty closure

DESIGN AND CONSTRUCTION

Seams factory sealed with thermal tape.

Drawstring closure.

SIZE RANGE

Sizes - (XS, M, XL, 3XL)

Size XL:

- a. Center Back Length: 19" (plus or minus 0.25 inches)
- b. Hood Neckline: 19 ½" (plus or minus 0.25 inches)

REVERSIBLE HIGH-VISIBILITY JACKET SPECIFICATIONS

Flying Cross by Fechheimer Item: 57160

FABRIC

Outershell to be 100% nylon 3-ply Supplex.

COLOR

Outershell color to be LAPD Navy.

LINING (REVERSIBLE SIDE)

100% Polyester high-visibility fluorescent yellow.

BASIC DESIGN

Jacket to have windproof, waterproof, and breathable membrane with all seams properly sealed and shall meet ANSI 2 standard. It shall be full cut with a butted reversible Vislon zipper to the top of collar. Jacket shall have a separate waistband, elasticized across the back, and side zippers with elasticized tabs. Jacket to have one-piece back, dual entry inverted pleat patch pockets with pointed flaps, permanent shoulder straps, and badge tabs fabric/color coordinated on both sides. Epaulettes shall be affixed to the jackets to allow for placement of rank insignia.



COLLAR AND COLLAR STAND

Jacket construction must incorporate a collar stand, as this feature is critical to overall appearance of the garment. The permanent collar and collar stand shall be made of two plies of the basic fabric plus the interlining. The interlining shall be sewn to the under collar and the under collar stand. The collar points shall be well shaped and symmetrical. The collar shall be top stitched with collar points long enough for a neat appearance. Collar facing to extend to top edge of upper reflective stripe on the fluorescent yellow side.

BODY DESIGN

The jacket shall be full cut, waist length, with Vislon reversible zipper to top of collar. Collar to have collar stand. The fronts shall be plain with patch pockets measuring approximately 6-3/4" wide by 7" deep with top edge of pocket turned in and finished approximately 3/4" so there are no raw edges. Inverted pleat shall be approximately 1-1/2" wide. Pleat shall be sewn to open approximately 4". Side opening of pocket shall be approximately 5" to allow access to the hand warmer

compartment/pocket. Flap to measure approximately 7-1/4" across, 2-1/4" at each side, and 3" at center point where there shall be a horizontally positioned dummy buttonhole to accommodate a metal button. Flap and pocket to have small snap at each end to close separate top opening compartment/pocket. Left pocket flap to have hidden pen opening on left side approximately 1-1/2" wide, bartacked at each side. There shall be 4 weep holes (metal eyelets) on LAPD Navy side, at front and back of jacket, both sides, approximately 1-3/4" from side zippered vents.

WAISTBAND

Separate waistband shall measure 2-1/4", plain across the front, elasticized (shirred) across the back with two rows of stitching through the center. Side zipper vents shall be butted and finish approximately 9-1/2" long. Zipper to be nylon reversible. Elasticized tab shall be approximately 3-1/2" long by 1" wide and snap on front of jacket with black scratch proof snaps. An additional scratch proof snap shall be positioned approximately 1-1/4" towards back of jacket waistband to hold tab in place if not utilized by wearer.

SLEEVES

Sleeves shall be a 2-piece articulated sleeve to improve comfort and ease of movement. There shall be a 8" nylon zipper (on LAPD Navy side) on the underside of the sleeve to allow for access inside coat for emblem sewing. The bottom of the sleeve shall have a 2" cuff, elasticized (shirred with 3 rows of stitching) across the back, with 1-1/2" wide by 2-1/2" long tab on front side of cuff with Velcro for adjustable closure. Loop side of Velcro on cuff shall be approximately 4" long by 1" wide and to attach to hook side of Velcro on bottom side of tab approximately 1-1/2" long by 1" wide. There shall be two weep holes (metal eyelets) spaced approximately 1" from cuff on front and back sides of sleeves.
LPSO patches affixed to sleeves.

SHOULDER STRAPS

To be approximately 1-3/4" wide tapering slightly to a point, cross stitched, and permanently inserted into armhole (on LAPD Navy side of coat only). Pointed end of shoulder strap to be tacked in place. There shall be a horizontally positioned dummy buttonhole to accommodate a metal button.

SILVER REFLECTIVE TAPE (REVERSIBLE LINING SIDE)

ANSI 2 standard silver reflective tape shall be placed on the fluorescent yellow side of jacket. All silver reflective tape to be 2" wide with Black edge. There shall be two rows on body of coat and sleeves. The top row on the body of coat to be positioned approximately 1" down from armhole and bottom row to be up approximately 1" from waistband and shall continue around back of jacket with stripes on back lining up with stripes on front. Sleeves to also have two rows of reflective tape positioned so that top row is approximately 5" down from armhole and bottom row to be approximately 4" from cuff. Tape on sleeves to line up at sleeve seams. Both rows of reflective tape on body shall line up at butted front zipper closure. "SHERIFF" in silver reflective tape shall be placed on the back of the fluorescent yellow side of the jacket.

BADGE TAB(S)

Both sides of jacket to have badge tab coordinating with color/fabric. To be positioned on left breast measuring 2-1/2" long by 7/8" wide with 2 metal eyelets 1-1/4" apart, center to center.

INTERLININGS

Front opening, collar, pocket flaps, cuffs, shoulder straps, and waistband to be interlined with pellaon.

FINISHING & PRESSING

The entire jacket must be made in a first class manner. Industrial construction will not be acceptable. All loose threads must be removed and jacket must be completely pressed with proper pressing equipment and properly shaped.

STOCK SIZES

To be available from stock in the following sizes:

Regulars – XS to 5XL

Longs – M to 5XL

Extra Longs – L to 4XL

STOCK PRODUCT

To ensure availability of style and color for the purpose of maintaining uniformity for future needs, bidders must provide evidence in the form of catalogs or product guides that this item is currently available on an "as needed" basis.

HONOR GUARD HATS

BAYLY or Equivalent

STYLE

Modified Pershing with black braid frame and English edge black patent

SIZES

XXS - XXL

COLOR

Midnight Navy

DEPUTY HATS

BAYLY or Equivalent

STYLE

Pershing with Black braid frame, permagold visor

SIZES

XXS - XXL

COLOR

Midnight Navy

WATCH CAP
San Mar Beanie or Equivalent

STYLE

Knit cap with Lafourche Parish 6 Point Star Patch attached to cuff.

SIZES

One Size Fits All

COLOR

Navy Blue



COMFORT COOL CAP
Otto Comfort Cool Cap or equivalent

STYLE

Ball cap with Lafourche Parish 6 Point Star Patch attached to the front panel.

SIZES

One Size Fits All

COLOR

Navy Blue



UNIFORM SPECIFICATIONS

6 POINT STAR PATCH

SIZE

2 ¼" H x 2" W



CMU UNIFORM SHIRT

Tru Spec TRU XTREME Uniform Shirt or Equivalent

Color: OD Green

Specifications:

1. Constructed from 50/50 nylon cotton rip-stop material
2. Mandarin collar can be worn up or down to keep out debris and contains a locker loop to hang
3. Back cape with hook & loop closure with the option for attachment flap and mesh inner lining
4. Loop faced upper sleeve pockets for patches, with hook & loop closure and hidden zipper front pocket
5. Zippered with hook & loop closure on front placket
6. Bellowed chest pockets with inverted pleat, hook & loop closure and hidden front zipper pocket
7. SuperFabric® covered external elbow pockets with external opening for elbow pads secured with hook & loop closure
8. Articulated elbows
9. Tri-pocket on the lower arm with document window flap and hook & loop closure with 3 exterior pen/pencil slots with a special tunnel system for alternating the tri-pocket from left to right for personal comfort
10. Adjustable hook & loop cuff
11. Imported

Sizes:

Small - XL Short
XS - 5XL Regular
Small - 3XL Long



CMU UNIFORM PANTS
TRU SPEC

Color: OD Green

Specifications:

1. Constructed from 50/50 nylon cotton rip-stop material
2. Slider waistband for a comfortable fit
3. 1" wide belt loops with 2-1/4" opening
4. Customized TRU-SPEC® original PRYM™ snap with YKK® brass zipper closure
5. Hidden internal handcuff key pocket in waistband
6. Reinforced front slash pocket openings to cut down on wear
7. Deep front pockets with hidden internal pocket
8. 2-knife/accessory pockets with stiff fused inner lining on both sides
9. Diamond shaped gusseted crotch for ease of movement
10. 2-leg cargo pockets with inverted pleat and angled opposing pleats, mitered flaps with hook & loop closure creating a unique pocket bellow that expands into a large space
11. Internal hidden front zipper pocket on both leg cargo pockets
12. 2-bellowed lower leg cargo pockets with inverted pleat and mitered flaps with hook & loop closure
13. SupeFabric® covered external knee pockets with external openings for knee pads secured with hook & loop closures
14. Articulated knees for added mobility and comfort
15. Expandable zipper lower leg opening with mesh lining
16. 1" clean finished leg hems with elastic and adjustable button closure
17. Imported

Sizes: Small – XL Short
XS - 5XL Regular
Small - 3XL Long



UNIFORM SPECIFICATIONS
CMU Alternative UNIFORM SHIRT
TRU SPEC

Color: OD Green

Specifications:

1. Constructed from 50/50 nylon cotton rip-stop sleeves with a No Melt, No Drip CORDURA® Baselayer™ 60/40 cotton nylon body
2. Mandarin collar that can be worn up or down to keep out debris and lined with the jersey fabric in the collar for added comfort
3. Zipper front closure with zipper hood for comfort
4. Loop faced shoulder pockets for patches, with hook & loop closure and hidden front zipper pocket
5. Articulated elbows
6. SuperFabric® elbows
7. Tri pocket with document window and 3 exterior pen/pencil slots on the sleeve with tunnel system for alternating tri-pocket from left to right arm
8. Angled cuff for added wrist/ hand protection with adjustable hook & loop closure
9. Imported

Sizes: XS - 3XL Regular
Medium - 2XL Long



UNIFORM SPECIFICATIONS

LPSO EMBLEM ARM PATCHES

4 ¼" x 4 ½" patch

Patch shall match current LPSO patch exactly



SUNGLASSES

Humvee Gear Bayonet Style Military Sunglasses (SKU HU52B) or approved equivalent.

Style: Military Bayonet Temple Sunglasses

Frame Requirements

1. Bayonet-style temples designed for comfortable wear with duty uniforms, hats, helmets, and hearing protection.
2. Gold-colored metal frame construction.
3. Corrosion-resistant finish.
4. Adjustable nose pads.
5. Lens width approximately 52 mm.

Lens Requirements

6. Impact-resistant polycarbonate lenses.
7. UV400 protection providing 100% protection against UVA and UVB rays.
8. Smoke, gray, or neutral tint suitable for outdoor law enforcement use.
9. Scratch-resistant coating.
10. Distortion-free optical quality.

Performance Requirements

11. Suitable for extended wear during law enforcement and corrections duties.
12. Lightweight design for all-day comfort.
13. Secure fit during physical activity.
14. Resistant to normal duty-related environmental conditions.

UNIFORM SPECIFICATIONS

WHITE DUTY GLOVES

Honor Guard Duty Gloves

Premier P7019 or approved equivalent

Style: White Duty Glove with Dotted Palm Grip

Material Requirements

1. Constructed of durable cotton or cotton-blend fabric.
2. White in color.
3. Breathable material suitable for extended wear.
4. Machine washable.

Design Requirements

5. Full-finger glove design.
6. Non-slip dotted palm surface for enhanced grip and handling.
7. Adjustable hook-and-loop (Velcro®-type) wrist closure for secure fit.
8. Flexible construction allowing dexterity for routine law enforcement and ceremonial duties.
9. Available in sizes Small through Extra Large.

Performance Requirements

10. Provides a secure grip when handling equipment and materials.
11. Comfortable for extended wear.
12. Maintains appearance and functionality through repeated use and laundering.
13. Suitable for traffic control, ceremonial details, honor guard functions, inspections, and other law enforcement duties.

Color

14. White.

Sizes: Small - XL

UNIFORM SPECIFICATIONS

RIBBON BAR MOUNT

Glendale Ribbon Bar Mounts or approved equivalent. Comparable products shall be constructed of durable stainless steel and include clutch-back attachment hardware.

Item: Ribbon Bar Mounts

Construction

1. Constructed of durable stainless steel or equivalent corrosion-resistant metal.
2. Lightweight design suitable for daily uniform wear.
3. Contoured backing designed to conform to the uniform surface.
4. Smooth edges and finish to prevent damage to uniforms.

Mounting Requirements

5. Compatible with standard law enforcement and military-style service ribbons.
6. Available in single, double, and triple ribbon capacities.
7. Includes clutch-back attachment system or equivalent secure fastening device.
8. Fasteners shall securely retain ribbons during normal duty activities.
9. Zero spacing.

Performance Requirements

10. Resistant to corrosion, tarnishing, and normal wear.
11. Maintains shape and retention capability during extended use.
12. Provides a professional appearance suitable for dress and Class A uniforms.

Finish

13. Polished or brushed stainless-steel finish.

Sizes: Single, Double, Triple, 4-ribbon mount (1/3), 5-ribbon mount (2/3)

UNIFORM SPECIFICATIONS

MEN'S SINGLE BREASTED TRENCH COAT

Anchor Uniform 260MTX or equivalent

Specifications:

1. Traditional 44" Balmacaan dress raincoat - single breasted trench coat with fly front
2. Outershell made of 60% Combed Cotton, 40% Polyester
3. Shell is treated with Dupont Teflon fabric protector for water and stain repellency
4. 100% polyester permanent lining
5. Zipout removable quilted liner - 100 gram 3M Thinsulate Insulation with sleeve warmer
6. Split raglan shoulder
7. Stand up collar
8. Pocket welts
9. Single back vent
10. Side cut-through pockets

Color: Navy

Sizes: Men's 36-60 Regular and Long
Women's sizes 2-26 Regular and Tall

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
1	1	Long Sleeve Alternate Deputy/Civil Deputy Shirts - Men's 5.11 46122, or equal Sizes XS - 2X Reg. & Tall Lengths	5	each		\$0.00	Brand bid: _____ Product Code: _____
2	1	Long Sleeve Alternate Deputy/Civil Deputy Shirts - Men's 5.11 46122, or equal Sizes 3XL Reg. & Tall Lengths	5	each		\$0.00	Brand bid: _____ Product Code: _____
3	1	Short Sleeve Alternate Deputy/Civil Deputy Shirts - Men's 5.11 46123, or equivalent Sizes XS - 2XL Reg. & Tall Lengths	10	each		\$0.00	Brand bid: _____ Product Code: _____
4	1	Short Sleeve Alternate Deputy/Civil Deputy Shirts - Men's 5.11 46123, or equivalent Sizes 3XL Reg. & Tall Lengths	10	each		\$0.00	Brand bid: _____ Product Code: _____
5	1	Long Sleeve Alternate Deputy/Civil Deputy Shirts - Women's 5.11 46122, or equivalent Sizes XS - 2XL Regular Lengths	5	each		\$0.00	Brand bid: _____ Product Code: _____
6	1	Long Sleeve Alternate Deputy/Civil Deputy Shirts - Women's 5.11 46122, or equivalent Sizes 3XL Regular Lengths	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
7	1	Short Sleeve Alternate Deputy/Civil Deputy Shirts - Women's 5.11 46123 or equivalent Sizes XS - 2XL Regular Lengths	5	each		\$0.00	Brand bid: _____ Product Code: _____
8	1	Short Sleeve Alternate Deputy/Civil Deputy Shirts - Women's 5.11 46123 or equivalent Sizes 3XL Regular Lengths	5	each		\$0.00	Brand bid: _____ Product Code: _____
9	2	Cotton Deputy Trouser - Brand 5.11 or equivalent Men's Regular Sizes 28 - 42 and Odd Sizes 31 - 37	10	each		\$0.00	Brand bid: _____ Product Code: _____
10	2	Cotton Deputy Trouser - Brand 5.11 or equivalent Men's Regular Sizes 44 - 48	10	each		\$0.00	Brand bid: _____ Product Code: _____
11	2	Cotton Deputy Trouser - Brand 5.11 or equivalent Men's Regular Sizes 50 - 54	10	each		\$0.00	Brand bid: _____ Product Code: _____
12	2	Cotton Deputy Trouser - Brand 5.11 or equivalent Women's Sizes 6 - 22	10	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
13	3 & 4	Deputy Jacket Outer-SHELL Unisex Flying Cross 57500 2-IN-JACKET or equivalent Regular Sizes XS - 2XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
14	3 & 4	Deputy Jacket Outer-SHELL Unisex Flying Cross 57500 2-IN-JACKET or equivalent Regular Sizes 3XL - 4XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
15	3 & 4	Deputy Jacket Outer-SHELL Unisex Flying Cross 57500 2-IN-JACKET or equivalent Long Sizes M - 2XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
16	3 & 4	Deputy Jacket Outer - SHELL Unitex Flying Cross 57500 2-IN-1 JACKET or equivalent Long Sizes 3XL - 4XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
17	5 THRU 10	Public Safety Jacket & Liner Flying Cross F1 79900GTXA or equivalent Short Sizes XS to Large	10	each		\$0.00	Brand bid: _____ Product Code: _____
18	5 THRU 10	Public Safety Jacket & Liner Flying Cross F1 79900GTXA or equivalent Regular Sizes XS - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
19	5 THRU 10	Public Safety Jacket & Liner Flying Cross F1 79900GTXA or equivalent Regular Sizes 3XL & 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
20	5 THRU 10	Public Safety Jacket & Liner Flying Cross F1 79900GTXA or equivalent Long Sizes Medium - 2XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
21	5 THRU 10	Public Safety Jacket & Liner Flying Cross F1 79900GTXA or equivalent Long Sizes 3XL - 5XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
22	11	Taclite Pro Shirts 511-71175 or equivalent short sleeve, Unisex Regular Sizes S - 2XL	100	each		\$0.00	Brand bid: _____ Product Code: _____
23	11	Taclite Pro Shirts 511-71175 or equivalent short sleeve, Unisex Regular Sizes 3XL - 4XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
24	11	Taclite Pro Shirts 511-71175 or equivalent short sleeve, Unisex Tall Sizes L - 2XL	40	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
25	11	Taclite Pro Shirts 511-71175 or equivalent short sleeve, Unisex Tall Sizes 3XL - 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
26	11	Taclite Pro Shirts 511-71175, or equivalent long sleeve, Unisex Regular Sizes S - 2XL	40	each		\$0.00	Brand bid: _____ Product Code: _____
27	11	Taclite Pro Shirts 511-71175 or equivalent long sleeve, Unisex Regular Sizes 3XL - 4XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
28	11	Taclite Pro Shirts 511-71175, or equivalent long sleeve, Unisex Tall Sizes L - 2XL	40	each		\$0.00	Brand bid: _____ Product Code: _____
29	11	Taclite Pro Shirts 511-71175 or equivalent long sleeve, Unisex Tall Sizes 3XL - 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
30	12	Taclite Pro Pants 5.11-74273 or equivalent Men's Sizes 28 - 42	100	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
31	12	Taclite Pro Pants 5.11-74273 or equivalent Men's Sizes 44 - 48	5	each		\$0.00	Brand bid: _____ Product Code: _____
32	12	Taclite Pro Pants 5.11-74273 or equivalent Men's Sizes 50 -54	6	each		\$0.00	Brand bid: _____ Product Code: _____
33	13 & 14	Short Sleeve Uniform Polo Shirt Olympic CMB342 or equivalent Unisex Sizes XS - 2XL Colors: Blue, Red	25	each		\$0.00	Brand bid: _____ Product Code: _____
34	13 & 14	Short Sleeve Uniform Polo Shirt Olympic-CMB342 or equivalent Unisex Sizes 3XL Colors: Blue, Red	5	each		\$0.00	Brand bid: _____ Product Code: _____
35	15	Bicycle Patrol/BDU Shorts Mocean 1150 or equivalent Unisex Sizes XS - 2XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
36	15	Bicycle Patrol/BDU Shorts Mocean 1150 or equivalent Unisex Sizes 3XL - 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
37	16	Motorcycle Jacket Taylor's Leatherwear G4473-Z or equivalent Sizes S - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
38	16	Motorcycle Jacket Taylor's Leatherwear G4473-Z or equivalent Sizes 3XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
39	17	Command Single Breasted Dress Coat Fechheimer or equivalent Sizes 32 - 42 Regular and Long	5	each		\$0.00	Brand bid: _____ Product Code: _____
40	17	Command Single Breasted Dress Coat Fechheimer or equivalent Sizes 44 - 48 Regular and Long	5	each		\$0.00	Brand bid: _____ Product Code: _____
41	17	Command Single Breasted Dress Coat Fechheimer or equivalent Sizes 50 & Up Regular and Long	5	each		\$0.00	Brand bid: _____ Product Code: _____
42	18	Administrative Cardigan Sweater Brand Cobmex 4018 or equivalent Sizes XS - 2XL	20	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
43	18	Administrative Cardigan Sweater Brand Cobmex 4018 or equivalent Sizes 3XL	20	each		\$0.00	Brand bid: _____ Product Code: _____
44	19	Sheriff's Traffic Safety Vest Unisex Regular Premier Uniforms or equivalent SM-M/L-XL/2XL-3XL	45	each		\$0.00	Brand bid: _____ Product Code: _____
45	20	Traffic Safety Gloves Premier Uniforms or equivalent Sizes S - XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
46	21	Deputy Ties - Break Away Samuel Broome or equivalent Sizes Regular & Long	5	each		\$0.00	Brand bid: _____ Product Code: _____
47	22	Deputy Ties - Clip-On Samuel Broome or equivalent Sizes Regular & Long	130	each		\$0.00	Brand bid: _____ Product Code: _____
48	22	Deputy Ties - Women's Cross Over Samuel Broome or equivalent Sizes Regular & Long	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
49	23	Metal Rank Insignia Sergeant Smith & Warren, Blackinton, or Equivalent 1" Chevrons, Gold	5	each		\$0.00	Brand bid: _____ Product Code: _____
50	23	Metal Rank Insignia Lieutenant Smith & Warren, Blackinton, or Equivalent 1" Bars, Gold	15	each		\$0.00	Brand bid: _____ Product Code: _____
51	23	Metal Rank Insignia Captain Smith & Warren, Blackinton, or Equivalent 1" Bars, Gold	5	each		\$0.00	Brand bid: _____ Product Code: _____
52	23	Metal Rank Insignia Major Smith & Warren, Blackinton, or Equivalent 1" Leaf, Gold	5	each		\$0.00	Brand bid: _____ Product Code: _____
53	23	Metal Rank Insignia Sheriff Smith & Warren, Blackinton or Equivalent Four ½" Gold Connecting Stars	5	each		\$0.00	Brand bid: _____ Product Code: _____
54	23	Name Tags Smith & Warren, Blackinton or equivalent, Metal Finish, Gold Plate	250	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
55	23	Medals: Medal of Honor Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
56	23	Medals: Sheriff's Star Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
57	23	Medals: Medal of Valor Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
58	23	Medals: Lifesaving Smith & Warren, Blackinton or equivalent	250	each		\$0.00	Brand bid: _____ Product Code: _____
59	23	Medals: Purple Heart Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
60	23	Medals: Distinguished Service Smith & Warren, Blackinton or equivalent	160	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
61	24	Commendation Bars Smith & Warren, Blackinton or equivalent RC-3, RC-19, RC-22, RC-26, RC-27, RC-30, RC-32, RC-33, RC-38, RC-42, RC-45	1150	each		\$0.00	Brand bid: _____ Product Code: _____
62	24	Enamel Commendation Bars Smith & Warren, Blackinton or equivalent A4616-C, A3704, A346, A346-A, A3705, A3705-A, A7142-A, A7142-B, A10794, A10794-LS, A346, A346-A, A3704-A, A3705, A3705, A3705-A, A7142-A, A7142-B	25	each		\$0.00	Brand bid: _____ Product Code: _____
63	24	Breast Badge Smith & Warren, Blackinton or equivalent	105	each		\$0.00	Brand bid: _____ Product Code: _____
64	24	Hat/Wallet Badge Smith & Warren, Blackinton or equivalent	15	each		\$0.00	Brand bid: _____ Product Code: _____
65	24	L.P. and S.O. Collar Insignia Smith & Warren, Blackinton or equivalent	200	each		\$0.00	Brand bid: _____ Product Code: _____
66	25	Scuba Diver Pin Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
67	25	Operator Pin Centermass, Hero's or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
68	25	Angel Pin Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
69	25	Honor Guard Pin Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
70	26	Bike Patrol Pin Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
71	26	F.T.O. Pin Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
72	26	Motorcycle Wings Smith & Warren, Blackinton or equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
73	26	Flag Pin Smith & Warren, Blackinton or equivalent	210	each		\$0.00	Brand bid: _____ Product Code: _____
74	26	Corrugated Star Smith & Warren, Blackinton or equivalent	500	each		\$0.00	Brand bid: _____ Product Code: _____
75	27	Leather Badge Wallet D&K, Perfect Fit or equivalent	100	each		\$0.00	Brand bid: _____ Product Code: _____
76	27	MOCK Dickey Pudala Model 109 or Equivalent	5	each		\$0.00	Brand bid: _____ Product Code: _____
77	28	Epaulettes Eisman Ludmar Co. or Equivalent	155	each		\$0.00	Brand bid: _____ Product Code: _____
78	29 thru 31	Women's CLASS A Short Sleeve, white Uniform Shirt Elbeco Z9813LCN TEXTROP2 (with zipper) or Equivalent Sizes 28 - 52	50	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
79	32 thru 34	Women's CLASS A Short Sleeve, blue Uniform Shirt Elbeco Z9813LCN TEXTROP2 (with zipper) or Equivalent Sizes 28 - 52	210	each		\$0.00	Brand bid: _____ Product Code: _____
80	35 Thru 37	Men's CLASS A, Short Sleeve, white Uniform Shirt Elbeco Z3313N TEXTROP2 (with zipper) or Equivalent Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22	20	each		\$0.00	Brand bid: _____ Product Code: _____
81	38 Thru 40	Men's CLASS A, Short Sleeve, blue Uniform Shirt Elbeco Z3313N TEXTROP2 (with zipper) or Equivalent Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22	410	each		\$0.00	Brand bid: _____ Product Code: _____
82	41 Thru 43	Women's CLASS A, Long Sleeve, white, Uniform Shirt Elbeco Z9313LCN TEXTROP2 (with zipper) or Equivalent Sizes 28-52/Sleeve length: Regular & Long	5	each		\$0.00	Brand bid: _____ Product Code: _____
83	44 thru 46	Women's CLASS A, Long Sleeve, blue, Uniform Shirt Elbeco Z9313LCN TEXTROP2 (with zipper) or Equivalent Sizes 28-52/Sleeve length: Regular & Long	20	each		\$0.00	Brand bid: _____ Product Code: _____
84	47 thru 49	Men's CLASS A, Long Sleeve, white, Uniform Shirt Elbeco item: Z313N TEXTROP2 (with zipper) or equivalent Sleeve lengths: 32-37 inches Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
85	50 Thru 52	Men's CLASS A, Long Sleeve, blue, Uniform Shirt Elbeco item: Z313N TEXTROP2 (with zipper) or equivalent Sleeve lengths: 32-37 inches Neck sizes: 14-1/2 to 18-1/2, 19, 20, 21, 22	40	each		\$0.00	Brand bid: _____ Product Code: _____
86	53 Thru 56	Women's CLASS A Trousers Flying Cross by Fechheimer TR070WT or Equivalent Sizes 2 - 22	135	each		\$0.00	Brand bid: _____ Product Code: _____
87	53 Thru 56	Women's CLASS A Trousers Flying Cross by Fechheimer TR070WT or Equivalent Sizes 24 - 26	10	each		\$0.00	Brand bid: _____ Product Code: _____
88	57 Thru 60	Men's CLASS A Trousers Flying Cross by Fechheimer TR070 or Equivalent Sizes 28 - 42	210	each		\$0.00	Brand bid: _____ Product Code: _____
89	57 Thru 60	Men's CLASS A Trousers Flying Cross by Fechheimer TR070 or Equivalent Sizes 44 - 48	30	each		\$0.00	Brand bid: _____ Product Code: _____
90	57 Thru 60	Men's CLASS A Trousers Flying Cross by Fechheimer TR070 or Equivalent Sizes 50 - 54	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
91	61 & 62	Explorer Uniform Short Sleeve Shirt Southeastern Code "3" Men's Style 3206 Equivalent Men's Neck Sizes 14 - 22	5	each		\$0.00	Brand bid: _____ Product Code: _____
92	61 & 62	Explorer Uniform Short Sleeve Shirt Southeastern Code "3" Ladies Shirt Style L-3206 or Equivalent Women's Bust sizes 30 - 50	5	each		\$0.00	Brand bid: _____ Product Code: _____
93	63	Explorer Uniform Trousers G & K Serv. Co #21403 (717020) or equivalent Men's Sizes 28-66	5	each		\$0.00	Brand bid: _____ Product Code: _____
94	63	Explorer Uniform Trousers G & K Serv. Co #21403 (717020) or equivalent Women's sizes 2 - 26	5	each		\$0.00	Brand bid: _____ Product Code: _____
95	64 & 65	Motorcycle Pants Sizes Argo 909 or equivalent Custom Measure per Deputy	10	each		\$0.00	Brand bid: _____ Product Code: _____
96	64 & 65	Motorcycle Pants Argo 909 or equivalent Sizes Custom Measure per Deputy(space needed for larger sizes)	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
97	66	Rain Pants Neese NV9102 ET or equivalent Sizes XS - 2XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
98	66	Rain Pants Neese NV9102 ET or equivalent Sizes 3XL - 6XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
99	67	Rain Parka Neese NV 9102APK or equivalent Sizes XS - 2XL	10	each		\$0.00	Brand bid: _____ Product Code: _____
100	67	Rain Parka NV 9102APK or equivalent 3XL - 6XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
101	68 & 69	Reversible Motorcycle Rain Jacket 5010 Breathable, Neese 5010RJH3M or equivalent Regular Sizes S - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
102	68 & 69	Reversible Motorcycle Rain Jacket 5010 Breathable, Neese 5010RJH3M or equivalent Regular Sizes 3XL - 6XL	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
103	68 & 69	Reversible Motorcycle Rain Jacket 5010 Breathable, Neese 5010RJH3M or equivalent Long Sizes M - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
104	68 & 69	Reversible Motorcycle Rain Jacket 5010 Breathable, Neese 5010RJH3M or equivalent Long Sizes 3XL - 6XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
105	70 & 71	Reversible Motorcycle Rain Pants 5010 Breathable, Neese 5010RPT3M or equivalent Regular Sizes S - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
106	70 & 71	Reversible Motorcycle Rain Pants 5010 Breathable, Neese 5010RPT3M or equivalent 3XL - 6XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
107	70 & 71	Reversible Motorcycle Rain Pants 5010 Breathable, Neese 5010RPT3M or equivalent Short Sizes S - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
108	70 & 71	Reversible Motorcycle Rain Pants 5010 Breathable, Neese 5010RPT3M or equivalent Short Sizes 3XL - 6XL	5	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
109	72	SNAP On HOOD for Motorcycle Rain Jacket 5010 Neese or equivalent Sizes XS, M, XL, & 3XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
110	73 & 74	Reversible High Visibility Jacket Flying Cross by Fechheimer 57160 or equivalent Regular Sizes XS - 2XL	45	each		\$0.00	Brand bid: _____ Product Code: _____
111	73 & 74	Reversible High Visibility Jacket Flying Cross by Fechheimer 57160 or equivalent Regular Sizes 3XL - 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
112	73 & 74	Reversible High Visibility Jacket Flying Cross by Fechheimer 57160 or equivalent Long Sizes M - 2XL	45	each		\$0.00	Brand bid: _____ Product Code: _____
113	73 & 74	Reversible High Visibility Jacket Flying Cross by Fechheimer 57160 or equivalent Long Sizes 3XL - 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
114	73 & 74	Reversible High Visibility Jacket Flying Cross by Fechheimer 57160 or equivalent Extra- Long Sizes XS - 2XL	45	each		\$0.00	Brand bid: _____ Product Code: _____

Bid LPSO139-2026
Uniforms

Attachment C -
Bid Sheet

Revised per Addendum NO. 1 dated
07/31/26

Bidder: _____

<i>Line Item</i>	<i>Page On Specs</i>	<i>Item Description</i>	<i>Est. Qty.</i>	<i>Case UOM</i>	<i>Unit Price</i>	<i>Extended Price</i>	<i>Detail item bid</i>
115	73 & 74	Reversible High Visibility Jacket Flying Cross by Fechheimer 57160 or equivalent Extra- Long Sizes 3XL - 5XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
116	75	Honor Guard Hats BAYLY or Equivalent Sizes XXS - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
117	75	Deputy Hats BAYLY or Equivalent Sizes XXS - 2XL	5	each		\$0.00	Brand bid: _____ Product Code: _____
118	76	Watch Cap San Mar Beanie or equivalent One size fits all	100	each		\$0.00	Brand bid: _____ Product Code: _____
119	76	Ball Cap Otto Comfort Cool Cap or equivalent One size fits all	150	each		\$0.00	Brand bid: _____ Product Code: _____
120	77	Small Star Badge Patch	850	each		\$0.00	Brand bid: _____ Product Code: _____



Attachment D

PRICE ADJUSTMENT CLAUSE

The Lafourche Parish Sheriff's Office's price adjustment criteria are as follows:

VENDOR shall agree that submitted pricing **will be held firm of the original contract period of twenty-four (24) months**. A price escalation or reduction may be requested by the VENDOR or the Sheriff's Office, to the price of all items. The Sheriff's Office may, in its sole discretion, accept an equitable adjustment in the Contract terms or pricing if pricing or availability of supply is affected by extreme and unforeseen volatility in the marketplace, that is, by circumstances that satisfy all the following criteria: (1) the volatility is due to causes wholly beyond the VENDOR's control, (2) the volatility affects the marketplace or industry, not just the particular Contract source of supply, (3) the effect on pricing or availability of supply is substantial, (4) the volatility so affects the VENDOR that continued performance of the Contract would result in a substantial loss and (5) No price adjustment will be approved to compensate a vendor for inefficiency or for errors or omissions in judgment or for additional profit.

Requests from the VENDOR for price adjustments shall be **RECEIVED IN WRITING** (via email) and are subject to Sheriff's Office approval and executed contract amendment before becoming effective. Failure to reach agreement for a price adjustment may, at the sole option of the Sheriff's Office, result in the termination of the Agreement for cause.

Official VERIFIABLE documentation of such changes SHALL be provided with the request for price adjustment in order to substantiate any requested change. The Sheriff's Office reserves the right to consider various pertinent information sources to evaluate price increase requests (such as the CPI and PPI, US CITY Average, as published by the US Department of Labor, Bureau of Labor Statistics). The Sheriff's Office also reserves the right to consider other information related to special economic and/or industry circumstances, when evaluating a price change request. Changes may be either increases or decreases, and may be requested by either party.

As an authorized representative of the company listed below, I fully understand, accept and agree to abide by the procedures denoted in this price adjustment clause.

VENDOR NAME _____

ADDRESS _____

AUTHORIZED SIGNATURE _____

PRINTED SIGNATURE _____ DATE _____